

DK-56D 15.6" Windows Touch Screen POS

DK-56D Commercial POS System with 15.6" Display, Windows Touch Screen Cash Register, magstripe reader and rich I/O for retail front-end.



Dual Display
15.6 inch+VFD



Windows 10
Windows 7



Intel Core I3
Intel Core I5



Magstripe
Card Reader



15.6-inch Touch Experience



Optional VFD customer display



Magstripe Card Reader



Compact exterior design




Commercial POS System for QSR



Convenience & Grocery Fast Lane



Hypermarket Front-End Checkout

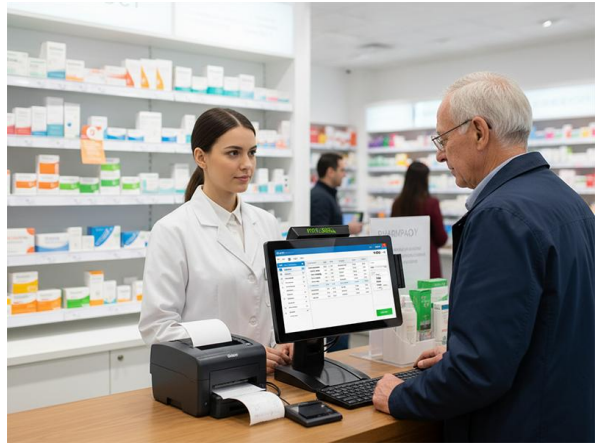

Pharmacy & Specialty Retail POS

Main Feature

- ◆ **Commercial POS System:** Compact single display fits crowded counters and minimizes clutter.
- ◆ **Windows Touch Screen Cash Register:** 15.6-inch LED panel enables quick taps and clean UI navigation.
- ◆ **High Performance POS Machine:** Intel i3/i5/i7 with up to 16GB RAM keeps menus responsive.
- ◆ **Single Display POS Terminal:** Optional VFD shows totals clearly to reduce disputes at checkout.
- ◆ **Magstripe Card Reader:** Supports loyalty, staff login, and basic payment swipes.
- ◆ **Retail-Ready I/O Ports:** 6×USB, 2×COM, VGA, RJ45 connect drawers, scanners, and printers.
- ◆ **Flexible Storage Options:** 64 – 512GB SSD/HDD choices balance cost and capacity.
- ◆ **Stable Windows 7/10 Support:** Broad software compatibility across retail environments.
- ◆ **Optional Wireless & Audio:** WiFi/BT and speaker options enhance deployment flexibility.
- ◆ **Entry-Tier TCO Focus:** Durable build and simple maintenance help control ownership cost.

Technical Specifications

Item	Specification
Processor / CPU	Intel® i3/i5 (retail class)
Operating System	Windows 7/10 (Windows 11 IoT optional by project)
Memory & Storage	4–16GB RAM, SSD up to 512GB
Main Display	15.6" capacitive touchscreen (operator display)
Customer Display (Optional)	LED8N (VFD:Optional)
Card reader	Magnetic stripe card reader
I/O Ports	USB ×6, LAN ×1, COM ×1, DC-in ×1
Networking	Gigabit Ethernet; optional Wi-Fi/Bluetooth via adapter
Power	AC 100–240V adapter → DC 12V input
Environmental	Operating 0°C–40°C; Storage –20°C–60°C; 10%–90% RH non-condensing; ESD/Shock: TBD
Recommended Accessories	Bluetooth; VFD customer display
Dimensions & Weight	41*21.5*38cm G.W.:5.5kg

I/O Layout (Reference)



6xUSB



1xRJ45



1xDC



2xCOM



1xVGA



Audio

Compliance & Safety

- ◆ CE, FCC, RoHS (final configuration dependent)
- ◆ Power supply with over-voltage and over-current protection
- ◆ K-lock slot support (chassis dependent)

Manageability & Security

- ◆ Remote maintenance via standard Windows tools (RDP, MSI/Silent install)
- ◆ BIOS/OS password policies; user role separation
- ◆ Cable-management path for clean in-store install

Package Contents & Support

- ◆ Main unit, power adapter, power cable, quick start guide
- ◆ 12 months standard; 24/36 months extended (optional)
- ◆ Support: <https://www.poszeo.com/service/support/>

Contact & Next Steps

- ◆ Explore Products: poszeo.com/products
- ◆ Request a Quote: poszeo.com/contact-us
- ◆ Email: sales@poszeo.com
- ◆ Phone/Whats App: [+86 198 6074 3416](tel:+8619860743416)

Document Control

- ◆ Doc: DK-56D | Rev: v1.2 | Date: 2025-11-05
- ◆ Notes: Specifications may change without notice; options & certifications depend on final configuration and region.

