


Product Page

Layout Idea

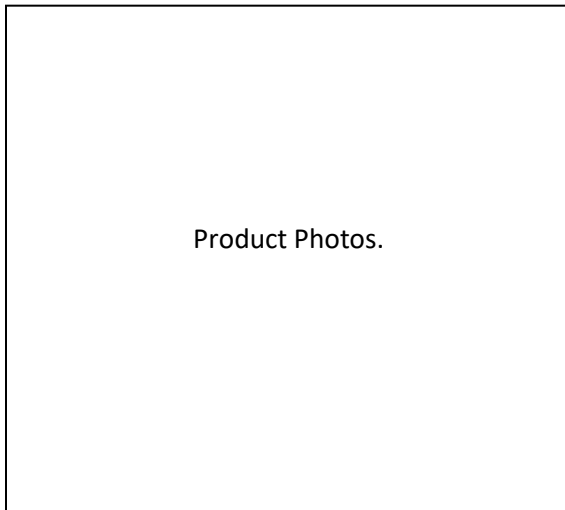

Product Name

Product Code

Download Catalogue button

“Quantity button”

“Request RFQ Button”

Choose Cycles (Button): 50/60Hz

Variants: HP

Below option to choose from

Specification | Features | Shipping | Warranty

All details that were selected from the above options.

“Description” about 50-100 words.

Application Logos (live GIFs)

Recommended Products

Standard Footer

Submersible

4" Submersible Motor

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50/60Hz

Variants Available (HP):

0.75, 1.0, 1.5, 2.0, 3.0, 5.0, 7.5

“If 50Hz Selected”

Descp: (Same for 50 and 60Hz)

The **Amstar 4" Water-Filled Submersible Motor** is designed to deliver reliable, efficient, and long-lasting performance for borewell and submersible pump applications. Engineered for continuous operation, it provides stable output even under demanding working conditions.

Specification

Phase	Single/Three Phase
Voltage	240 / 380 / 415
Material	SS302 / SS&CI
Coolant	Water Filled
RPM	2800
Insulation Class	Class B
Protection Class	IP68

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Rotors are treated with special epoxy paint to ensure corrosion resistance.
- Impeller and diffusers are high quality 30% glass filled engineering polymer.
- All sleeves are hard chrome plated to ensure the long life in sandy condition.
- Lip seal and Bushes are well protected by sand guards for sand friendly operation.
- Polymer parts are well protected by metallic wear ring.

- Heavy duty specially designed carbon thrust bearing.
- Built in NRV with minimum friction to prevent back flow.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

India- All products in stock can be shipped same day for next day delivery.

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us for lead time information.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 50Hz-----

"If 60Hz Selected"

Variants Available (HP):

0.75, 1.0, 1.5, 2.0, 3.0, 4.0, 5.0, 7.5

Specification

Phase	Single / Three Phase
Voltage	230 / 380 / 460
Material	SS304
Coolant	Water Filled
RPM	3455 / 3460
Insulation Class	Class B
Efficiency	61-73%

Features

- 4" Water lubricated rewindable motor
- Coupling dimension as per NEMA standard
- Winding wire: polywrapped:-signature
- Max water temperature: 35° C
- Degree of protection: IP68
- Max start 30-35 time/hour

- Motor shaft: SS 400
- Max depth immersion :300 M
- Allowable Voltage variation: +5 % - 9%
- Stator shell of SS 304
- Min cooling flow 0.2 M/S
- MOTOR CABLE :4 Mtr (3 core)
- Motor coolant: water type
- Upper bracket stainless Steel
- Bottom cup stainless steel

Shipping

All 60Hz products for International Shipments are either in stock at our Saudi Warehouse or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

-----**END OF 60Hz**-----

APPLICATION

Home

Farms

Residential Building

Factory

-----**END**-----

Submersible

6" Submersible Motor

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50/60Hz

Variants Available (HP):

3, 5, 6, 7.5, 10, 12.5, 15

“If 50Hz Selected”

Descp: (Same for 50 and 60Hz)

The **Amstar 6" Water-Filled Submersible Motor** is designed to deliver reliable, efficient, and long-lasting performance for borewell and submersible pump applications. Engineered for continuous operation, it provides stable output even under demanding working conditions.

Specification

Phase	Single/Three Phase
Voltage	240 / 380 / 415
Material	SS302 / SS&CI
Coolant	Water Filled
RPM	2800
Insulation Class	Class B
Protection Class	IP68

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Rotors are treated with special epoxy paint to ensure corrosion resistance.
- Impeller and diffusers are high quality 30% glass filled engineering polymer.
- All sleeves are hard chrome plated to ensure the long life in sandy condition.
- Lip seal and Bushes are well protected by sand guards for sand friendly operation.
- Polymer parts are well protected by metallic wear ring.

- Heavy duty specially designed carbon thrust bearing.
- Built in NRV with minimum friction to prevent back flow.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

India- All products in stock can be shipped same day for next day delivery.

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us for lead time information.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 50Hz-----

"If 60Hz Selected"

Variants Available (HP):

10, 15, 20, 25, 30, 40, 50

Specification

Phase	Single / Three Phase
Voltage	230 / 380 / 460
Material	SS304
Coolant	Water Filled
RPM	3495 - 3510
Insulation Class	Class F
Efficiency	74-84%

Features

- 6" Water lubricated rewindable motor
- Coupling dimension as per NEMA standard
- Winding wire: polywrapped:-signature
- Max water temperature : 35° C

- Degree of protection: IP68
- Max start 30-35 time/hour
- Motor shaft: SS 400
- max depth immersion :350 M
- Allowable Voltage variation: +7 % - 11%
- Stator shell of SS 304
- Min cooling flow 0.2 M/S
- MOTOR CABLE :4 Mtr (3 core)
- Motor coolant: water type
- Upper bracket stainless Steel
- Bottom cup stainless steel

Shipping

All 60Hz products for International Shipments are either in stock at our Saudi Warehouse or at our main facility in India. Please contact us to know more about Lead time.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 60Hz-----

APPLICATION

Home

Farms

Residential Building

Factory

-----END OF 6"-----

Submersible

8" Submersible Motor

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50/60Hz

Variants Available (HP):

10 / 15 / 20 / 25 / 30 / 40 / 50

“If 50Hz Selected”

Descp: (Same for 50 and 60Hz)

The **Amstar 8" Water-Filled Submersible Motor** is designed to deliver reliable, efficient, and long-lasting performance for borewell and submersible pump applications. Engineered for continuous operation, it provides stable output even under demanding working conditions.

Specification

Phase	Three Phase
Material	SS302 / SS&Cl
Voltage Range	380 - 415V
Coolant	Water Filled
Flow Range (m ³ /h)	30-280
Insulation Class	Class F

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Rotors are treated with special epoxy paint to ensure corrosion resistance.
- Impeller and diffusers are high quality 30% glass filled engineering polymer.
- All sleeves are hard chrome plated to ensure the long life in sandy condition.
- Lip seal and Bushes are well protected by sand guards for sand friendly operation.

- Polymer parts are well protected by metallic wear ring.
- Heavy duty specially designed carbon thrust bearing.
- Built in NRV with minimum friction to prevent back flow.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

India- All products in stock can be shipped same day for next day delivery.

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us for lead time information.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 50Hz-----

"If 60Hz Selected"

Variants Available (HP):

60,75,100,125,150

Specification

Phase	Three Phase
Voltage	380 / 460
Material	SS304
Thrust Load	45000-60000
Coolant	Water Filled
Insulation Class	Class B
Efficiency	81-88%

Features

- 8" Water lubricated rewindable motor
- Coupling dimension as per NEMA standard
- Winding wire: polywrapped:-signature
- Max water temperature : 35° C

- Degree of protection: IP68
- Max start 30-35 time/hour
- Motor shaft: SS 400
- max depth immersion :350 M
- Allowable Voltage variation: +7 % - 10%
- Stator shell of SS 304
- Min cooling flow 0.2 M/S
- MOTOR CABLE :4.5 Mtr (3 core)
- Motor coolant: water type
- Upper bracket stainless Steel
- Bottom cup stainless steel

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 60Hz-----

APPLICATION

Residential Building

Mining

Farms

Factory

-----END-----

Submersible

4" Submersible Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50/60Hz

Compatible with Motors (HP):

0.75, 1.0, 1.5, 2.0, 3.0, 5.0, 7.5

“If 50Hz Selected”

Descp: (Same for 50 and 60Hz)

The **Amstar 4" Submersible Pump** is designed to deliver reliable, efficient, and long-lasting performance for borewell and submersible pump applications. Engineered for continuous operation, it provides stable output even under demanding working conditions.

Specification

Phase	Single/Three Phase
Head	120-1250
Material	SS302 / SS&CI
Coolant	Water Filled
Delivery	32-50mm
No. of Stages	4-25
Insulation Class	Class B
Pump Size	10-50

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Designed for efficient water lifting with high hydraulic performance.
- Corrosion-resistant construction ensures long service life.
- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Energy-efficient design delivers consistent performance with low maintenance.

- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

India- All products in stock can be shipped same day for next day delivery.

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us for lead time information.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 50Hz-----

"If 60Hz Selected"

Compatible with Motors (HP):

0.75, 1.0, 1.5, 2.0, 3.0, 4.0, 5.0, 7.5

Specification

Phase	Three Phase
Voltage	230 / 380 / 460
Material	SS304
Head	120-1250
Material	SS302 / SS&CI
Coolant	Water Filled
Delivery	32-50mm
No. of Stages	4-25
Insulation Class	Class B
Pump Size	10-50

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Designed for efficient water lifting with high hydraulic performance.
- Corrosion-resistant construction ensures long service life.

- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Energy-efficient design delivers consistent performance with low maintenance.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----**END OF 60Hz**-----

APPLICATION

Home

Farms

Residential Building

Factory

-----**END**-----

Submersible

6" Submersible Pump

Product Code

Download Catalogue [button](#)

"Quantity [button](#)"

"Request RFQ [Button](#)"

Choose Cycles ([Button](#)): 50/60Hz

Compatible with Motors (HP):

3, 5, 6, 7.5, 10, 12.5, 15

"If 50Hz Selected"

Descp: (Same for 50 and 60Hz)

The **Amstar 6" Submersible Pump** is designed to deliver reliable, efficient, and long-lasting performance for borewell and submersible pump applications. Engineered for continuous operation, it provides stable output even under demanding working conditions.

Specification

Phase	Single/Three Phase
Head	120-1250
Material	SS302 / SS&CI
Coolant	Water Filled
Delivery	32-50mm
No. of Stages	6-80
Pump Size	10-50

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Designed for efficient water lifting with high hydraulic performance.
- Corrosion-resistant construction ensures long service life.
- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Energy-efficient design delivers consistent performance with low maintenance.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

-----END OF 50Hz-----

"If 60Hz Selected"

Compatible with Motors (HP):

10, 15, 20, 25, 30, 40, 50

Specification

Phase	Three Phase
Voltage	230 / 380 / 460
Material	SS304
RPM	3495 - 3510
Head	120-1250
Material	SS302 / SS&CI
Coolant	Water Filled
Delivery	32-50mm
No. of Stages	6-80
Pump Size	10-50

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Designed for efficient water lifting with high hydraulic performance.
- Corrosion-resistant construction ensures long service life.
- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Energy-efficient design delivers consistent performance with low maintenance.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----**END OF 60Hz**-----

APPLICATION

Home

Farms

Residential Building

Factory

-----**END**-----

Submersible

8" Submersible Pump

Product Code

Download Catalogue [button](#)

"Quantity [button](#)"

"Request RFQ [Button](#)"

Choose Cycles ([Button](#)): 50/60Hz

Compatible with Motors (HP):

10 / 15 / 20 / 25 / 30 / 40 / 50

"If 50Hz Selected"

Descp: (Same for 50 and 60Hz)

The **Amstar 8" Submersible Pump** is designed to deliver reliable, efficient, and long-lasting performance for borewell and submersible pump applications. Engineered for continuous operation, it provides stable output even under demanding working conditions.

Specification

Phase	Three Phase
Head	60-500
Material	SS302 / SS&Cl
Coolant	Water Filled
Flow Range (m ³ /h)	30-280
Insulation Class	Class F
Pump Size	3-5"

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Designed for efficient water lifting with high hydraulic performance.
- Corrosion-resistant construction ensures long service life.
- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Energy-efficient design delivers consistent performance with low maintenance.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

-----END OF 50Hz-----

"If 60Hz Selected"

Compatible with Motors (HP):

60,75,100,125,150

Specification

Phase	Three Phase
Head	60-500
Material	SS302 / SS&Cl
Coolant	Water Filled
Flow Range (m ³ /h)	30-280
Insulation Class	Class F

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Designed for efficient water lifting with high hydraulic performance.
- Corrosion-resistant construction ensures long service life.
- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Energy-efficient design delivers consistent performance with low maintenance.
- Easy C.I. parts are in C.E.D. Coated.
- All sleeves are hard chrome plated to ensure long life in sandy condition.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

All Amstar products include a standard 12-month warranty. For information on our extended warranty options, please get in touch with our team.

-----END OF 60Hz-----

APPLICATION

Residential Building

Mining

Farms

Factory

-----END-----

-----END OF SUBMERSILES-----

Multi Surface

Commercial

Single Phase Openwell Submersible Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

0.5, 1.0, 1.5, 2.0

“50Hz only”

Descp:

Amstar Openwell Submersible Pumps are designed for efficient and reliable water transfer in domestic and agricultural applications. Manufactured with high-quality **SS302 stainless steel**, they offer excellent corrosion resistance and durability. Operating at **50Hz**, these pumps deliver stable performance, energy efficiency, and long service life under standard operating conditions.

Specification

Phase	Single Phase
Body	SS302/ SS302 &CI
Voltage	220V
Head	80-100
Delivery	32mm
Insulation Class	Class B
Pump Size	25x25 / 32x25

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Rotors are treated with special epoxy paint to ensure corrosion resistance.
- Manufactured with high-quality **SS302 stainless steel** for superior corrosion resistance.
- Designed for continuous duty operation with stable 50Hz performance.
- Compact and robust construction for easy installation in open wells.
- Energy-efficient motor ensuring reliable and consistent water discharge.

- Low maintenance design with durable components for extended service life.
- Easy C.I. parts are in C.E.D. Coated.

Shipping

- All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

- Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Farms

Residential Building

Irrigation

-----END-----

Multi Surface

Commercial

Three Phase Openwell Submersibles

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

3.0, 5.0, 7.5

“50Hz only”

Descp:

Amstar Openwell Submersible Pumps are designed for efficient and reliable water transfer in domestic and agricultural applications. Manufactured with high-quality **SS302 stainless steel**, they offer excellent corrosion resistance and durability. Operating at **50Hz**, these pumps deliver stable performance, energy efficiency, and long service life under standard operating conditions.

Specification

Phase	Three Phase
Body	SS302 , SS&CI
Voltage	380-415 V
Head	90-100
Discharge Rate	300-900lpm
RPM	2800
Insulation Class	Class B
Pump Size	2.5x2, 4x3, 3x2.5

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Rotors are treated with special epoxy paint to ensure corrosion resistance.
- Manufactured with high-quality **SS302 stainless steel** for superior corrosion resistance.
- Designed for continuous duty operation with stable 50Hz performance.
- Compact and robust construction for easy installation in open wells.
- Energy-efficient motor ensuring reliable and consistent water discharge.

- Low maintenance design with durable components for extended service life.
- Easy C.I. parts are in C.E.D. Coated.

Shipping

- All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

- Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Farms

Residential Building

Irrigation

-----END-----

Multi Surface

Commercial

Vertical Multi Stage Openwell Pumps

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

1.0, 1.5, 3.0, 5.0, 7.5, 10, 20, 30

“50Hz only”

Descp:

Amstar Vertical Multistage Pumps are designed for efficient and reliable water transfer in domestic agricultural and industrial applications. Manufactured with high-quality **SS302 stainless steel**, they offer excellent corrosion resistance and durability. Operating at **50Hz**, these pumps deliver stable performance, energy efficiency, and long service life under standard operating conditions.

Specification

Phase	Single Phase & Three Phase
Body	SS302 , SS&CI
Voltage	220 / 380-415 V
Head	Upto 270m
RPM	2900
Max Flow Rate	Upto 190 m ³ /h
Protection Standard	IP68

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Manufactured with high-quality **SS302 stainless steel** for superior corrosion resistance.
- Multi-stage impellers provide high head and steady discharge.
- IP68-rated motor allows safe and reliable underwater operation.
- Designed for continuous duty operation with stable 50Hz performance.
- Compact and robust construction for easy installation in open wells.

- Energy-efficient motor ensuring reliable and consistent water discharge.
- Low maintenance design with durable components for extended service life.
- Easy C.I. parts are in C.E.D. Coated.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Farms

Residential Building

Irrigation

-----**END**-----

Multi Surface

Commercial

Monoblock Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

0.5, 1.0

“50Hz only”

Descp:

Amstar Monoblock Pumps are compact, efficient water transfer solutions for domestic and agricultural use. Designed to suit standard Indian conditions, they operate at 50Hz for stable performance. Built with a durable SS302 stainless steel body, they offer excellent corrosion resistance, reliable operation, and low maintenance with easy installation.

Specification

Phase	Single Phase
Body	SS302 / SS302&Cl
Voltage	220-240V
RPM	2800
Insulation Class	Class B
Pump Size	25x25 / 32x25

Features

- All rotating components are dynamically balanced to ensure long bearing life and vibration free smooth operation.
- Durable **SS302 stainless steel body** for superior corrosion resistance.
- Compact monoblock design with pump and motor on a single shaft.
- Operates at standard **50Hz frequency** for Indian power conditions.
- Energy-efficient performance with stable water discharge.
- Low maintenance construction with easy installation and long service life.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

-----**END**-----

APPLICATION

Home

Farms

Residential Building

Irrigation

-----**END**-----

Multi Surface

Commercial

Self Priming Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

0.5, 1.0

“50Hz Only”

Descp:

Amstar Self Priming Pumps are compact, efficient water transfer solutions for domestic and agricultural use. Designed to suit standard Indian conditions, they operate at 50Hz for stable performance. Built with a durable Aluminum body, they offer excellent corrosion resistance, reliable operation, and low maintenance with easy installation.

Specification

Phase	Single Phase
Body	SS302 / SS302&Cl
Voltage	220-240V
RPM	2800
Suction Lift	6-8 m
Insulation Class	Class B
Pump Size	25x25

Features

1. Durable **Aluminium body** for superior corrosion resistance.
2. Compact monoblock design with pump and motor on a single shaft.
3. Operates at standard **50Hz frequency** for Indian power conditions.
4. Energy-efficient performance with stable water discharge.
5. Low maintenance construction with easy installation and long service life.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Farms

Garden

Irrigation

-----**END**-----

Multi Surface

Commercial

Splitcase Pump

Product Code

Download Catalogue button

“Quantity button”

“Request RFQ Button”

Choose Cycles (Button): 50Hz / 60Hz

“If 50Hz Selected”

Variants Available (HP):

10, 15, 20, 30, 40, 50, 60, 70

Descp: (Same for 50 and 60Hz)

Amstar Split Case Pumps are designed for high-capacity water transfer in industrial, municipal, and commercial applications. Featuring a horizontally split casing for easy maintenance, these pumps deliver efficient and reliable performance. Built with a robust standard design, they ensure smooth operation, high flow rates, and long service life in demanding environments.

Specification

Phase	Three Phase
Voltage	380-415 V
Body Material	CI & SS302
RPM	1450 / 2900
Head	10-200m
Delivery	80-600mm

Features

- **Horizontally split casing** design for easy maintenance and servicing.
- **High flow capacity** suitable for large water transfer applications.
- **Robust construction** for reliable and continuous operation.
- **Efficient double-suction impeller** for balanced hydraulic performance.
- **Low vibration and smooth operation** ensuring longer equipment life.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

"If 60Hz Selected"

Variants Available (HP):

80, 90, 100, 125, 150, 200, 250, 300, 500

Descp: (Same for 50 and 60Hz)

Amstar Split Case Pumps are designed for high-capacity water transfer in industrial, municipal, and commercial applications. Featuring a horizontally split casing for easy maintenance, these pumps deliver efficient and reliable performance. Built with a robust standard design, they ensure smooth operation, high flow rates, and long service life in demanding environments.

Specification

Phase	Three Phase
Voltage	440-480 V
Body Material	CI & SS302
RPM	1750 / 3500
Head	15-220m
Flow Range	120-6000 ³ /h
Delivery	80-700mm

Features

- **Horizontally split casing** design for easy maintenance and servicing.
- **High flow capacity** suitable for large water transfer applications.
- **Robust construction** for reliable and continuous operation.
- **Efficient double-suction impeller** for balanced hydraulic performance.
- **Low vibration and smooth operation** ensuring longer equipment life.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

City/ Municipal Water system

Fire Fighting

Heating and Water cooler

Factory

-----END-----

-----END OF COMMERCIAL-----

Multi Surface

House Hold

Booster Pump

Product Code

Download Catalogue button

“Quantity button”

“Request RFQ Button”

Choose Cycles (Button): 50Hz

Variants Available (HP):

0.5, 1.0, 1.5, 2.0, 3.0, 5.0

“50Hz only”

Descp:

Amstar Booster Pumps are designed to increase water pressure efficiently in residential and commercial applications. Built with a durable SS stainless steel body, they offer reliable performance and long service life. With a standard design and easy installation, Amstar booster pumps ensure consistent water flow and energy-efficient operation.

Specification

Phase	Three Phase
Body	SS302
RPM	1500
Pressure	Upto 145 PSI or 10Bar

Features

1. Durable **SS stainless steel body** for corrosion resistance and long life.
2. Designed to provide **consistent high-water pressure** in low-pressure systems.
3. Suitable for **residential, commercial, and industrial applications**.
4. Energy-efficient operation for **reliable performance with low maintenance**.
5. Compact, standard design for **easy installation and space-saving setup**.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Residential Buildings

Shower system

Irrigation

-----**END**-----

Multi Surface

House Hold

Centrifugal Monoblock Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

0.75, 1.0, 1.5, 2.0, 3.0, 5.0, 7.5, 10

“50Hz Only”

Descp:

AMSTAR 4” Water-Filled Submersible Motor

Amstar Centrifugal monoblock pumps are compact pumping units where the pump and motor are directly coupled on a single shaft, ensuring efficient and smooth operation. They are widely used for water supply, irrigation, and light industrial applications. Their simple design offers reliable performance, easy installation, and low maintenance.

Specification

Phase	Single Phase / Three Phase
Body	CI & SS302
Head	15-100mm
RPM	2800
Max Flow Rang	Upto 100 ³ /h

Features

- **Compact monoblock design** with pump and motor on a single shaft.
- **Efficient and smooth operation** with minimal vibration.
- **Durable construction** for long service life.
- **Easy installation** and low maintenance requirements.
- **Versatile applications** for water supply, irrigation, and light industrial use.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Farms

Garden

Irrigation

-----**END**-----

Multi Surface

House Hold

Sewage Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

0.5, 1.0, 1.5, 3.0, 5.0

“50Hz only”

Descp:

Amstar Household Sewage Pumps are compact and reliable units designed for efficient wastewater removal in homes and small residential complexes. Built with a robust SS or cast iron body, they handle solids and effluents smoothly. Easy to install and maintain, these pumps ensure dependable operation, preventing blockages and maintaining hygienic water flow.

Specification

Phase	Single Phase / Three Phase
Body	SS302 / CI
Voltage	220-240 V / 380-415 V
Head	5-25m
Delivery	5-50m ³ /h
Solid Handling	30-50 mm diameter
Pump Size	10-50

Features

1. **Handles solids efficiently** up to 30–50 mm diameter.
2. **Durable SS or cast iron body** for corrosion resistance and long life.
3. **Compact and easy to install** in homes and small residential setups.
4. **Reliable submersible operation** with thermal overload protection.
5. **Energy-efficient design** delivering consistent flow and performance.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Home

Farms

Residential Building

Factory

-----**END**-----

Multi Surface

House Hold

De Watering Pump

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz

Variants Available (HP):

3, 5, 7.5, 10, 15, 20, 30, 40, 50

“50Hz only”

Descp:

Amstar Dewatering Pumps are designed for efficient removal of water from construction sites, basements, pits, and flooded areas. Built with a robust and reliable design, these pumps deliver strong performance and durability. Operating at **50 Hz**, they ensure dependable water transfer for construction, industrial, and drainage applications.

Specification

Phase	Single Phase / Three Phase
Body	SS302 / CI
Voltage	220-240 V / 380-415 V
Delivery	5-120m ³ /h
Solids Handling	10-20mm*

Features

- **Efficient water removal** for construction, industrial, and flooded areas.
- **Durable body construction** in cast iron, aluminum, or stainless steel.
- **Capable of handling small solids** up to 10–20 mm diameter.
- **Compact and portable design** for easy installation and operation.
- **Reliable 50 Hz performance** with low maintenance requirements.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

Restaurants

Sewage Pipes

Residential Building

Factory

-----**END**-----

Multi Surface

House Hold

Circulatory Pump

Product Code

Download Catalogue button

“Quantity button”

“Request RFQ Button”

Choose Cycles (Button): 50Hz

Variants Available (HP):

0.25, 0.5, 0.75, 1.0, 1.5

“50Hz only”

Descp: (Same for 50 and 60Hz)

Amstar Household Circulatory Pumps are designed for efficient water circulation in homes and small residential complexes. With a robust SS or cast iron body, they ensure reliable performance, energy-efficient operation, and long service life. Ideal for domestic hot water loops and small circulation systems, these pumps are compact, easy to install, and low maintenance.

Specification

Phase	Single Phase
Voltage	220-240 V
Body	SS / CI
Head	5-25m
Flow Range	1-15m ³ /h

Features

- **Compact design** for easy installation in homes and apartments.
- **Durable SS or cast-iron construction** for long-lasting performance.
- **Efficient water circulation** for domestic hot water and small loops.
- **Energy-efficient operation** with low maintenance requirements.
- **Reliable 50 Hz single-phase performance** suitable for Indian households.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

City/ Municipal Water system

Fire Fighting

Heating and Water cooler

Factory

-----END-----

-----END OF MULTI SURFACE-----

Accessories

Cable

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Variants Available:

Round, Flat, Plywrapped XLPE and PE2PA

Descp: (Same for 50 and 60Hz)

Amstar Cables are high-quality electrical cables designed for reliability and safety across residential, commercial, and industrial applications. Our range includes Round, Flat, Ply-Wrapped, XLPE, and PE2PA cables, offering excellent insulation, durability, and superior electrical performance. Engineered to meet standard specifications, Amstar Cables ensure safe and efficient power transmission in all environments.

Specification

Voltage	110-1100 V
Conductor Material	Copper / Aluminum
Insulation Material	XLPE, PVC or PE2PA
Temperature Range	-10 ⁰ C to +90 ⁰ C

Features

- **High-quality insulation** for safety and long service life.
- **Durable conductors** for efficient electrical transmission.
- **Flexible designs** including round, flat, and ply-wrapped options.
- **Wide voltage rating** suitable for multiple applications.
- **Resistant to heat, moisture, and chemical exposure** for reliable performance.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

City/ Muncipal Water system

Appliances

Home

Factory

-----END-----

Accessories

Control Panels

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Choose Cycles ([Button](#)): 50Hz/60Hz

All details same for 50/60Hz

Variants Available:

DOL, Star or Delta, Soft Starter, VFD, Made to Order

Descp: (Same for 50 and 60Hz)

Amstar Control Panels are engineered for safe and efficient motor and process control across industrial and commercial applications. Our range includes DOL, Star/Delta, VFD, Soft Starter, and custom-made panels, offering reliable operation, easy integration, and robust protection. Designed with high-quality components, Amstar panels ensure consistent performance and long service life for diverse automation and power control needs.

Specification

Phase	Three Phase (Standard)
Voltage	415 V, Other Voltages on request.
Frequency	50hz & 60hz
Enclosure	IP 54 / PI 65

Features

- **Components:** High-quality MCCBs, contactors, relays, overloads, PLCs (for VFD/Soft Starter)
- **Versatile range** including DOL, Star/Delta, VFD, Soft Starter, and custom panels.
- **Robust protection** for motors and electrical equipment.
- **High-quality components** for reliable, long-term operation.
- **Easy integration** into industrial and commercial systems.
- **Customizable designs** to meet specific application requirements.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

City/ Municipal Water system

Fire Fighting

Manufacturing

Factory

-----END-----

Accessories

Pipes

Product Code

Download Catalogue [button](#)

“Quantity [button](#)”

“Request RFQ [Button](#)”

Variants Available:

UPVC, Casing

Descp:

Amstar Pipes are durable and reliable piping solutions designed for residential, commercial, and industrial applications. Our product range includes UPVC and casing pipes, engineered for excellent corrosion resistance, high pressure tolerance, and long service life. Amstar Pipes ensure safe and efficient fluid conveyance in water supply, irrigation, and industrial systems.

Specification

UPVC Pipes

Size	25mm – 300mm
Pressure Rating	PN 6 – PN 16 (Standard)
Temperature Range	-10 ⁰ C to +60 ⁰ C

Features

- **Durable construction** for long-lasting performance.
- **Corrosion and chemical resistant** for safe water and fluid transport.
- **High-pressure tolerance** suitable for various applications.
- **Lightweight and easy to install** for quick deployment.
- **Versatile range** with UPVC and casing options for domestic, commercial, and industrial use.

Shipping

All products for International Shipments are either in stock at our Middle East Distribution Centre or at our main facility in India. Please contact us to know more about Lead time.

Warranty

Our products come with a standard 12 Month warranty. Please contact us to discuss the extended warranty program we offer.

APPLICATION

City/ Municipal Water system

Restaurants

Home

Factory

-----**END**-----