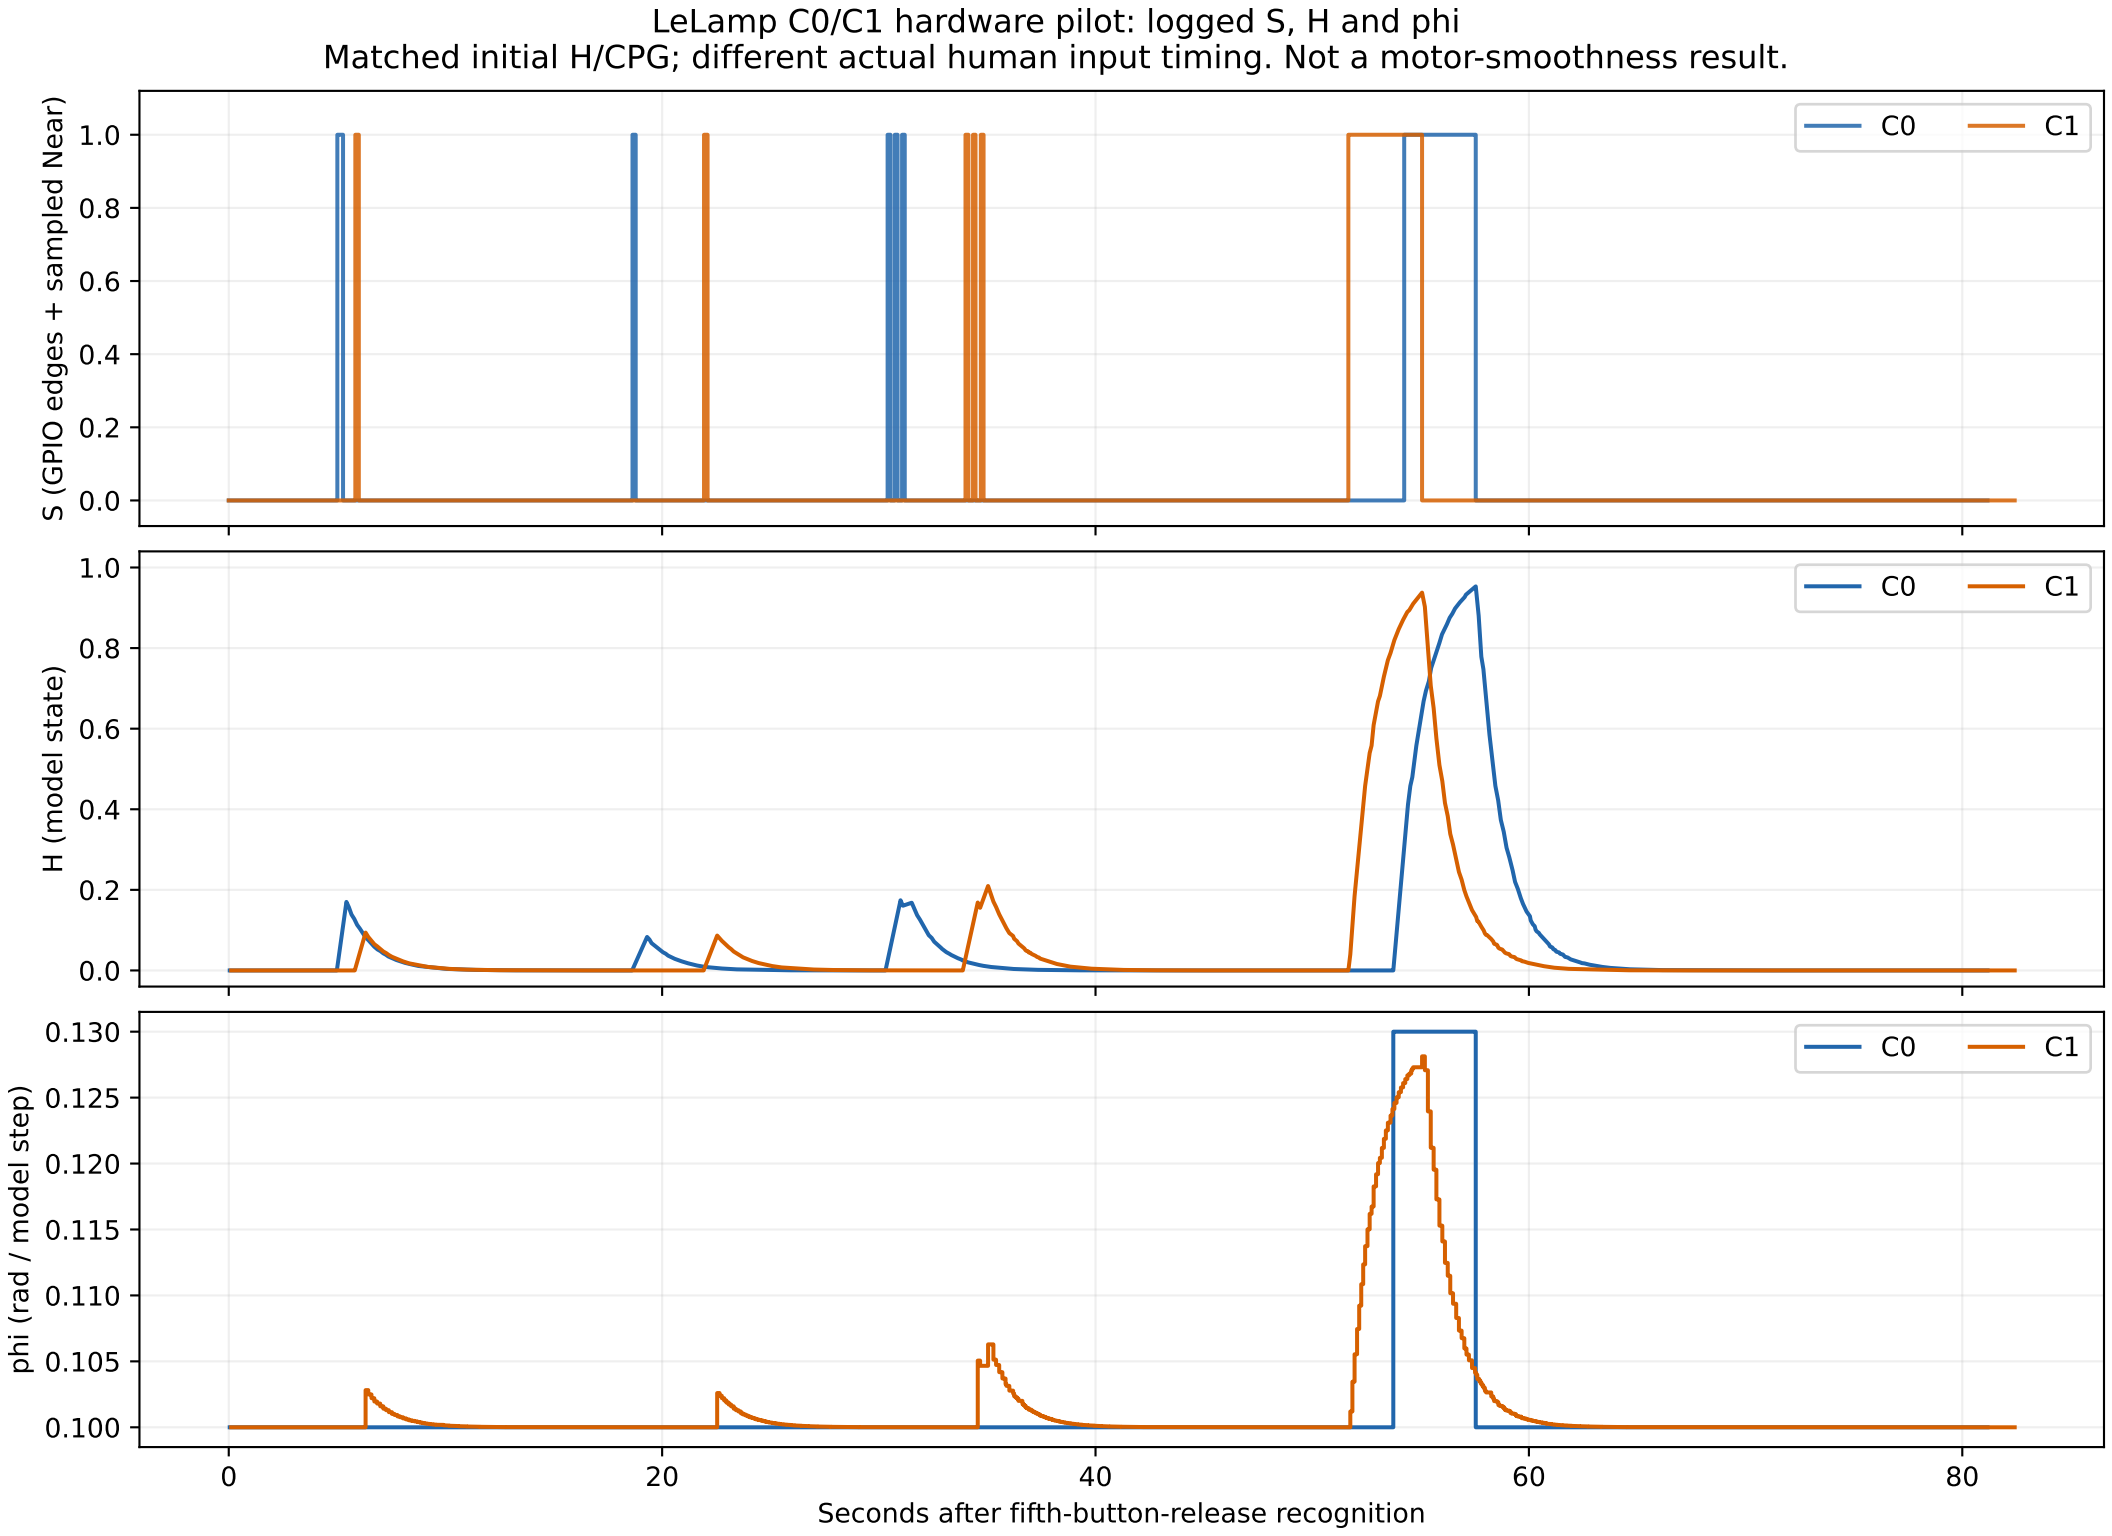
LeLamp C0/C1 hardware pilot: logged S, H and phi
Matched initial H/CPG; different actual human input timing. Not a motor-smoothness result.
S (GPIO edges + sampled Near)
H (model state)
phi (rad / model step)
C0
C1
Seconds after fifth-button-release recognition