




SEALS

THRESHOLDS

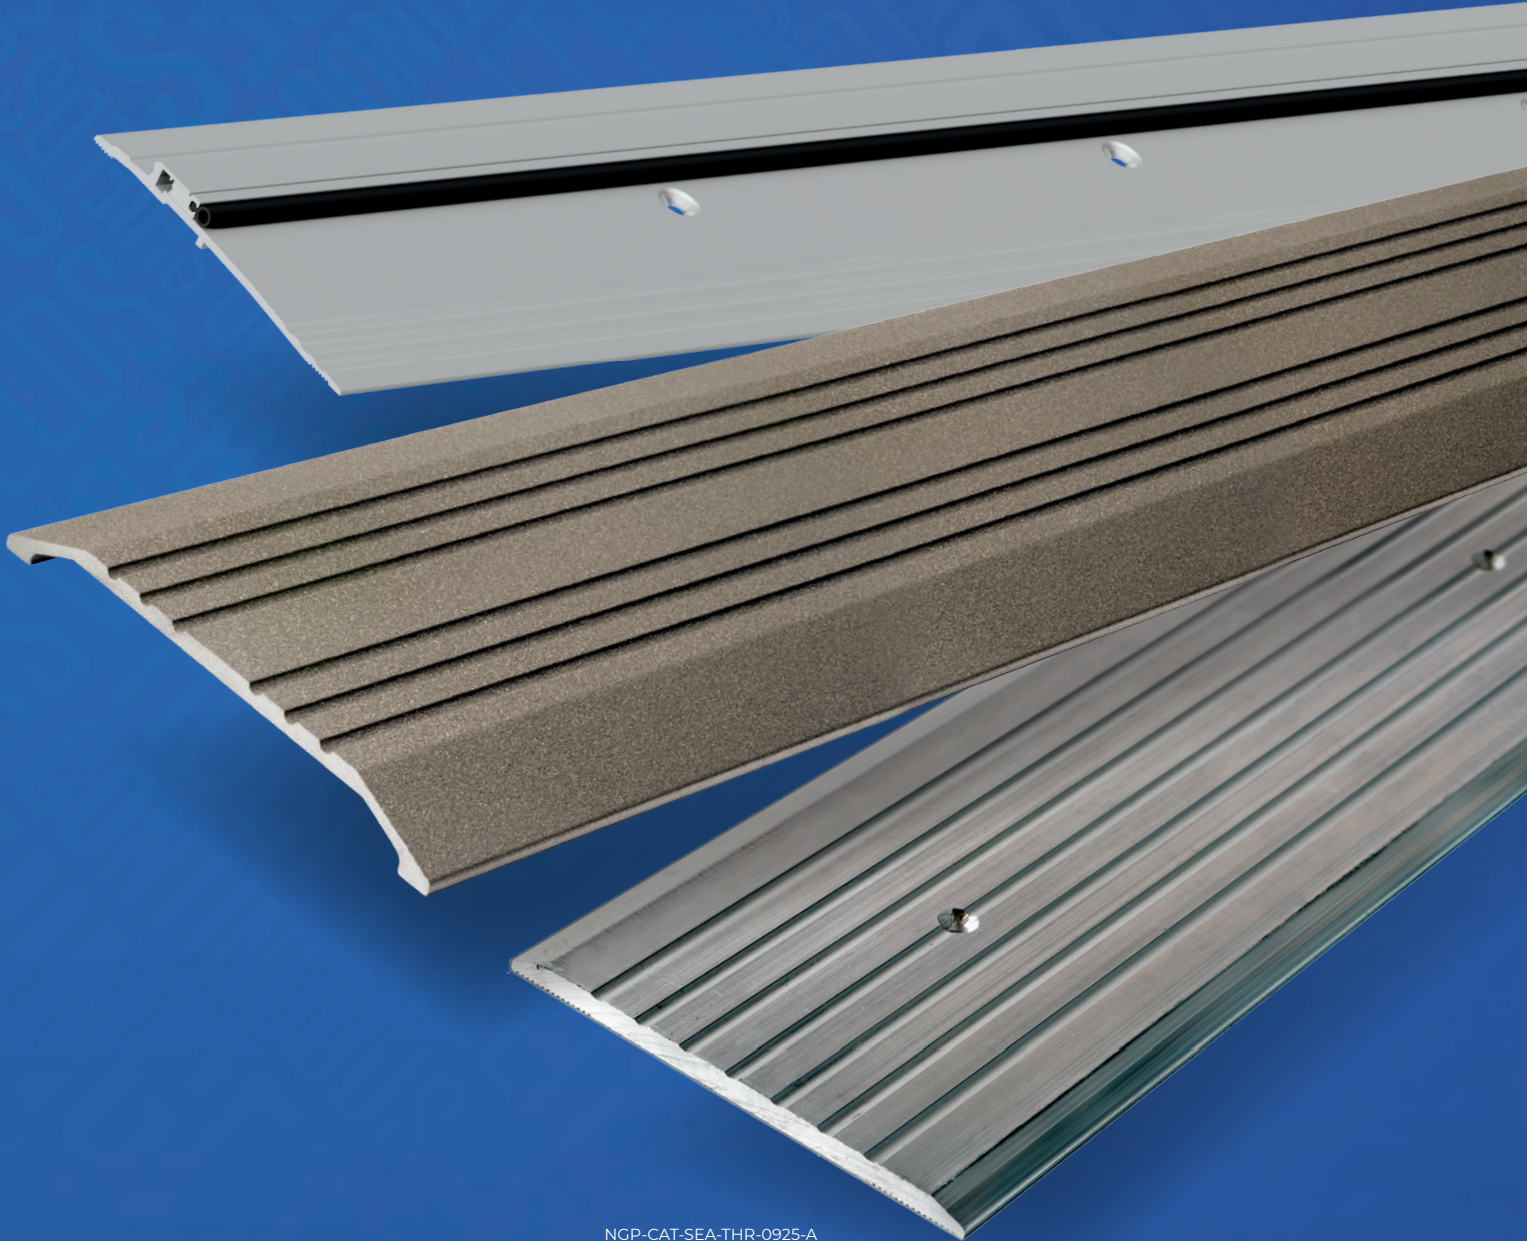

NGP-CAT-SEA-THR-0925-A



THRESHOLDS INDEX

Aluminum

Bar Supports.	T39
Bumper Seal.	T14, T16-T19, T24-T25, T29-T31
Components	
Half Saddle and Extended Width	T23, T25
Transition Strips	T23
Cover Plates	T40
Custom Fabricated	T38
Divider Thresholds and Edges	
Carpet and Tile Dividers,	
Carpet Edges	T20
Communicating Door.	T22
Vinyl Carpet and Tile	T21
Edge Components.	T39
Elevators	T31
Extended Width	T11-T12, T26
Extended Width Bumper Seal	T31
Floor Closer	T41-T42
Half Saddle.	T24-T25
Heavy-Duty	T14-T15
Offset	T20
Return Closed Ends	T34, T36
Ramps	
Aluminum	T32
Interlocking	T33-T34
Interlocking Offset.	T35-T36
Interlocking Ramp Components	T37
Interlocking Rubber.	T32
Saddle	T7-T10
Smooth Surface.	T13
Stop Strips	T17
Thermal Break	
Saddle.	T27-T29
Bumper Seal.	T29-T30
Vinyl Top	T31

Architectural Bronze

Custom Fabricated	T51
Floor Closer	T41
Half Saddle	T49
Interlocking	T50
Return Closed Ends	T34, T36
Saddle	T46-T47
Thermal Break	T48

Stainless Steel

Bumper Seal.	T45
Cover Plates	T40, T45
Floor Closer	T41
Saddle	T43-T44

Fasteners.	T52
--------------------	-----

NUMERICAL INDEX

BAR1	T39	350	T25	437	T10	896HD	T14	8170	T38
BAR2	T39	350BR	T49	438	T10	896SS	T45	8213	T11, T29
2	T17	355	T25	439	T10	897	T18	WA8213	T11
BAR4	T39	398	T21	440	T10	898	T24	8413	T28
4	T17	399	T21	442BR	T50	912SS	T44	8423	T29
BAR6SS	T40, T45	400	T21	457	T23	913	T9	8424	T27
Fasteners	T52	401	T21	458	T23	913SS	T43	8425	T27
RCE-9	T34, T36	402	T21	484BR	T50	950	T17	8426	T27
12V	T31	402X400X	T22	512	T13	951	T37	8427	T27
RCE-15	T34, T36	400X402		512SS	T44	RR952	T32	8428	T27
RCE-21	T34, T36	402X400X	T22	513	T9, T42	953	T37	8428BR	T48
RCE-30	T34, T36	402		513BR	T46	954	T37	8429	T27
RR42	T32	404	T20	513HD	T14	955	T37	8429BR	T48
R50	T33, T37	407	T21	513SS	T43	957	T37	8430	T27
RO50	T35	410	T13	515	T23	959	T37	8430BR	T48
58	T31	411	T13	612SS	T44	960	T37	8433	T29
R75	T33	412	T13	613	T9	961	T37	8434	T30
RO75	T35	412SS	T44	613BR	T46	962	T37	8435	T30
80B	T50	413	T9, T42	613HD	T15	1012SS	T44	8436	T30
R100	T33	413SS	T43	613SS	T43	1013	T9	8437	T30
RO100	T35	414	T20	653	T20	1013SS	T43	8475	T8
R125	T33	415	T23	654	T32	RR5007BL	T21, T32	8513	T28
RO125	T35	415BR	T49	655	T20	8013	T28	8533	T29
R150	T33	416	T20	657	T32	8113	T11, T29	8613	T28
RO150	T35	417	T20	659	T20	WA8113	T11	8633	T29
R175	T33	424	T8	700E	T17, T23	8130	T23	8713	T28
RO175	T35	424BR	T47	712SS	T44	8132	T23	8813	T28
R200	T33	424E	T7, T42	713	T9, T42	8133	T39	8913	T28
RO200	T35	425	T8	713BR	T46	8134	T39		
211	T8	425BR	T47	713SS	T43	8135	T18		
215	T23	425E	T7, T42	803	T19	8136	T39		
R225	T33	425HD	T14	804	T19	8136BR	T51		
RO225	T35	426	T8	812SS	T44	8137	T39		
R250	T33	426BR	T47	813	T9, T42	8138	T39		
RO250	T35	426E	T7	813BR	T46	8139	T39		
Type 1	T41	426HD	T15	813SS	T43	8140BR	T51		
Type 3	T41	427	T8	814	T40	8142	T38		
Type 4	T41	427BR	T47	814SS	T40, T45	8143	T38		
Type 5	T41	427E	T7, T42	818	T40	8144	T38		
315	T23	428BR	T47	818SS	T40, T45	8144BR	T51		
315BR	T49	428E	T7, T42	838	T40	8145	T38		
321	T25	429E	T7	882	T39	8145BR	T51		
322	T25	429BR	T47	883SS	T45	8146	T38		
323	T24	430E	T7	884	T19	8146BR	T51		
324	T24	430BR	T47	884B/S	T25	8147	T38		
325	T24	431	T12	884-6	T31	8148	T38		
325BR	T49	WA431	T12	884-7	T31	8149	T38		
325HD	T14, T24	432	T12	884-8	T31	8150	T38		
325HDX325HD	T15	WA432	T12	884SS	T45	8163	T38		
Welded		434	T10	890	T19	8164	T38		
327	T25	435	T10	896	T17	8167	T38		
327BR	T49	436	T10	896-ADJ	T16	8168N	T38		

RATINGS



ADA COMPLIANT. Barrier Free Thresholds Meet the Requirements of ADA Standards for Accessible Design and ICC/ANSI A117.1 Accessible and Usable Buildings and Facilities.



POSITIVE PRESSURE CERTIFIED by UL to ANSI/UL10C. Complies with IBC, NFPA 80 and NFPA 252 for Application to Hollow Metal Fire Doors Rated up to 3 hours, and Wood Fire Doors Rated up to 90 minutes.



CERTIFIED by UL to CAN/ULC-S104 and ANSI/UL10B. Complies with NFPA 80 and NFPA 252 for Application to Hollow Metal Fire Doors Rated up to 3 hours, and Wood Fire Doors Rated up to 90 minutes.



AIR FILTRATION TESTED to ASTM E283, Standard Test Method for Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors.



SLIP-RESISTANT. SIA Textured Surface is Available on All Thresholds. Our Process Embeds and Fuses Bits of Hot Nickel and Titanium into the Surface of the Threshold. Originally Developed for Use on Aircraft Carrier Decks, This Technology is Highly Slip-Resistant and Will Not Wear Off.



ANSI/BHMA CERTIFIED. Certified Thresholds Comply with American National Standard for Thresholds ANSI/BHMA A156.21 and are Listed in the BHMA Certified Products Directory.



Online Product Listings at ul.com/database.

ANSI/BHMA

The following explains ANSI/BHMA numbers which identify material and type of products. For products that meet ANSI/BHMA Standards, look for the BHMA certified logo next to the product in our catalog. For a complete listing refer to the BHMA Certified Products Directory online at buildershardware.com.



ANSI/BHMA A156.21 American National Standard for Thresholds

1 Product Section	2 Material	3 Configuration	4 Surface	5 Description	6 Description
"J" Designates Architectural Door Trim, Thresholds	1. Architectural Brass or Bronze 3. Aluminum 5. Stainless Steel 7. Rubber & Similar Non-Metallics 0. Other	1. Compressing Top 2. Flat Saddle 3. Half Saddle 4. Interlocking 5. Rabbeted, Latching/ Panic 6. Rabbeted, Latching/ Panic w/Gasket 7. Plate 8. Ramped 9. Saddle for Floor Closer 0. None Designated	1. Fluted 2. Fluted w/Slip-Resistant Finish 3. Smooth 4. Smooth w/ Slip-Resistant Finish	1. Applied Stop 2. Applied Stop w/ Gasket 3. Barrier Free 4. Carpet Separator 5. Ends Mitered 6. Expansion Assembly 7. Hook Strip Applied to Door 8. Offset 9. Thermal Barrier 0. None Designated	1. Applied Stop 2. Applied Stop w/ Gasket 3. Barrier Free 4. Carpet Separator 5. Ends Mitered 6. Expansion Assembly 7. Hook Strip Applied to Door 8. Offset 9. Thermal Barrier 0. None Designated Suffix- HD = Heavy Duty

MATERIALS AND FINISHES

MATERIALS

Thresholds are Aluminum Alloy 6063, T5 Temper, Unless Noted.

Cover Plates 818 and 814 are Aluminum Alloy 3003, H14 Hardness.

Cover Plate 838 is Aluminum Alloy 5052, H32 Hardness.

Architectural Bronze Thresholds are Alloy CDA 385 (Copper Alloy No. C38500), Architectural Bronze.

Stainless Steel Thresholds and Cover Plates are Type 304, Known for Its Excellent Corrosion Resistance, High Tensile Strength and Resistance to Oxidation.

FINISHES

				NGP Suffix
Aluminum:	Mill Finish	ANSI/BHMA 719	US27	None
	Dark Bronze / Black Anodized	ANSI/BHMA 711	US19	DKB
	Polished	ANSI/BHMA 717		POL
	Slip-Resistant			SIA
Architectural Bronze:	Satin Finish	ANSI/BHMA 728	US4	BR
	Dark Bronze Oil Rubbed	ANSI/BHMA 722	US10B	BR-DKB
	Polished	ANSI/BHMA 721	US3	BR-POL
	Slip-Resistant			BR-SIA
Stainless Steel:	Mill Finish			SS
	Brushed (#4)	ANSI/BHMA 630	US32D	SS-Brushed
	Polished	ANSI/BHMA 629	US32	SS-POL
	Slip-Resistant			SS-SIA

SIA (SLICK IT AIN'T) SLIP-RESISTANT FINISH

SIA (Slick It Ain't) finish is our slip-resistant textured surface, available on all thresholds up to 24" wide and on 818 aluminum and brass cover plates up to 10" wide.

Our SIA technology embeds bits of hot nickel and titanium into the surface of the threshold using a high pressure thermo-electrostatic process. It was originally developed for use on aircraft carrier decks. SIA finish is very durable and will not wear off.

This results in a slip-resistant surface that is similar to high grit sandpaper.

Aluminum and Stainless Steel SIA finish thresholds are a pewter color. Architectural Bronze SIA finish thresholds are a brass color.



Look for this SIA Icon to Find Products With this Optional Slip-Resistant Finish.



GENERAL INFORMATION

Aluminum and Architectural Bronze Thresholds and Assembly Components are furnished longer than ordered to allow for field sizing and fitting.

$\frac{1}{2}$ " is added to thresholds under 61"; 1" is added to thresholds over 61", unless ordered as "net" cut.

Unless noted, thresholds are punched for and provided with fasteners. Assembly parts are supplied undrilled with fasteners provided.

Special Drilling and Notching is available; details must be provided with the order.

Stainless Steel Thresholds are supplied "net" cut.


Radiation shielding with .030" thick Lead is available on most thresholds. Specify "Lead Lined".

Catalog Illustrations are full scale, except as noted.

RETURNED CLOSED ENDS


Return Closed Ends (RCE's) are available on most beveled thresholds.

The corner is miter cut on a 45 degree angle and returned to the face of the door frame for a neat, clean, finished appearance. Specify "RCE".

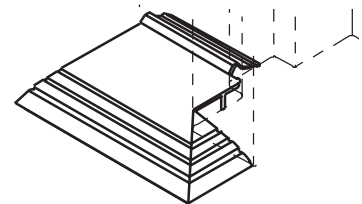

CUSTOM FABRICATED THRESHOLDS


Our Custom Fabrication Department specializes in producing custom thresholds to your specifications. Submit your details to our Technical Department for a quotation and drawing for your approval. Components Shown on pages T38 and T51 are used to build special assemblies like the one illustrated below. Aluminum, Brass and Stainless Steel Cover Plates are also custom formed and welded to meet special requirements.

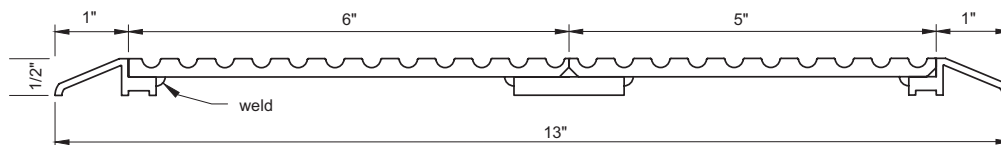

8137 x 8146 (Rip to 6") x 8145 x 8137 x Bar4 x Welded profile Assembly View

SPORTS FLOOR THRESHOLD ASSEMBLIES

Wood gymnasium sports floors are designed to be free floating. We offer threshold assemblies to cover the transition from the primary floor to the sports floor. As the sports floor shifts, the top plate of the threshold assembly moves, allowing for expansion and contraction.

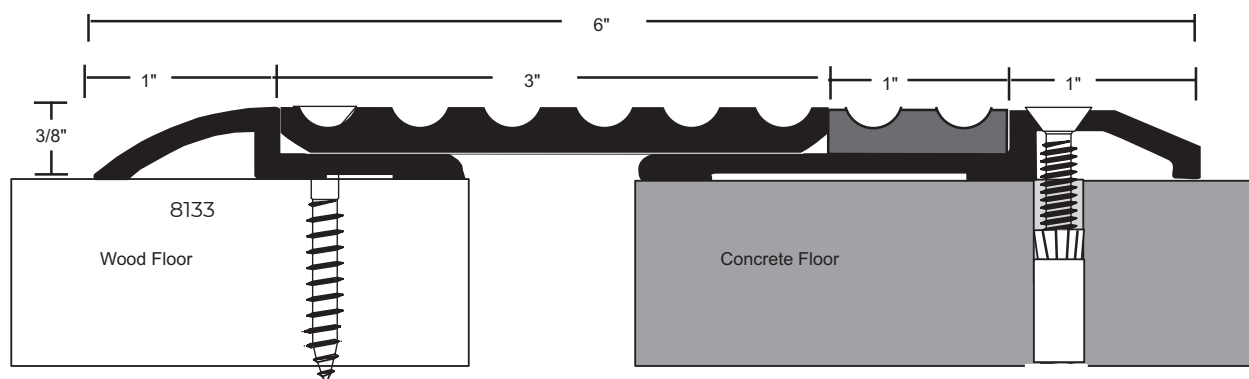

8133 x 8143 x 8168N (Neoprene) x 8139 x 10-24 MS/LA

Also available in $\frac{1}{2}$ " height and in other widths - contact NGP Technical Department

LEED GREEN BUILDING

LEED (Leadership in Energy and Environmental Design) Green Building Rating System® is a national standard for developing high-performance, sustainable buildings developed by the U. S. Green Building Council. Our current LEED letter containing LEED qualification information for all our products is available at ngp.com.

MRc2 Building Product Disclosure and Optimization - Environmental Product Declaration (EPD)

National Guard Products is able to provide Type III Product Specific Environmental Product Declarations for its Threshold, Gasketing, Lite Kits, Louvers and Continuous Geared Hinge products. The EPDs can be found at: ngp.com/epds.

MRc3 Building Product Disclosure and Optimization - Sourcing of Raw Materials

National Guard Products is able to provide a third-party reviewed corporate sustainability report that includes the environmental impacts

of extraction operations and activities associated with National Guard Products' supply chain. This report was created using the Global Reporting Initiative (GRI) Sustainability Reporting framework and satisfies MRc3 Option 1. The report can be found at: ngp.com/report.

For Option 2 of the MRc3 credit, products purchased from National Guard Products are eligible to participate in the NGP Extended Producer Responsibility program, RE-NGP, managed by National Guard Products.

Additionally for Option 2 of the MRc3 credit, average percentages of recycled materials utilized in and contained in NGP products may be found at: ngp.com/leed.

MRc4 Building Product Disclosure and Optimization - Material Ingredients

National Guard Products is able to provide product specific Health Product Declarations for its Threshold, Gasketing, Lite Kits and Louver products. The HPDs can be found at: ngp.com/hpds.

BUY AMERICAN REQUIREMENTS

Buy American Act

Over 99% of our products are produced in the United States as a domestic construction material, as defined in the Buy American Act (BAA) of March 1933 and amended by the Buy American Act of 1988 and FAR 52.225-9. A Buy American certificate may be obtained on our website ngp.com.

Buy America

Most of our products comply with Buy America Requirements of 49 U.S.C. 5323(j)(1), and the applicable regulations in 49 CFR part 661. Contact us for a Certificate of Compliance for your project.

Components of unknown origin are considered to have been produced or manufactured outside the United States.

Build America, Buy America








Many of our products comply with the Infrastructure Investment and Jobs Act, Build America, Buy America requirements. Contact us for a Certificate of Compliance for your project.

SADDLE THRESHOLDS

All Products On This Page



424E
Mill Aluminum Saddle
Threshold, ½" x 4"

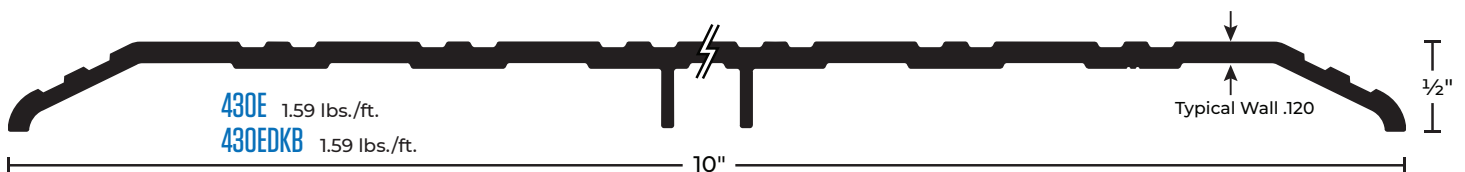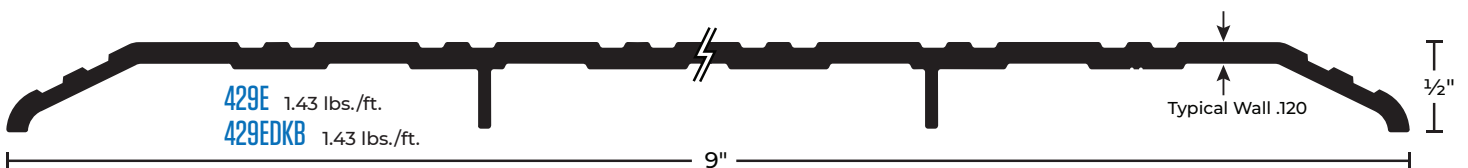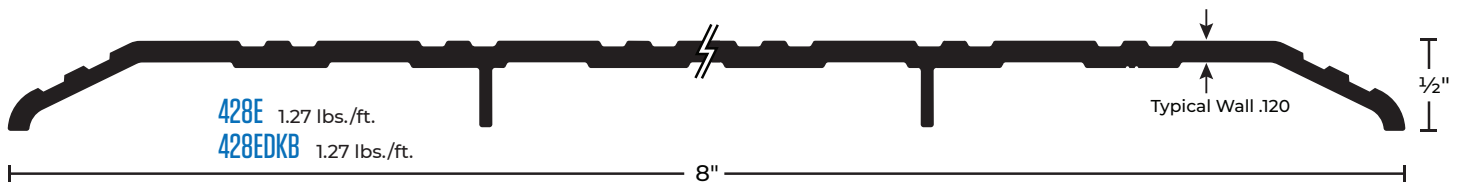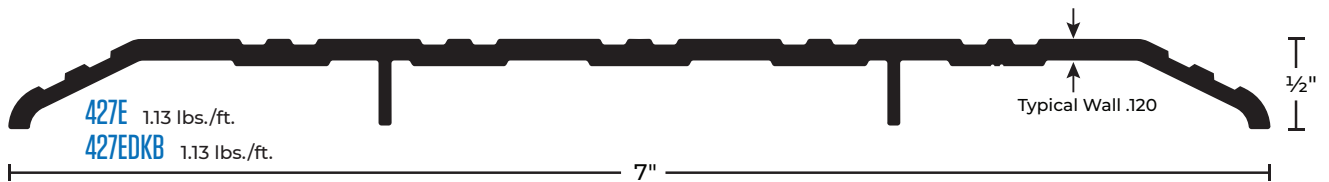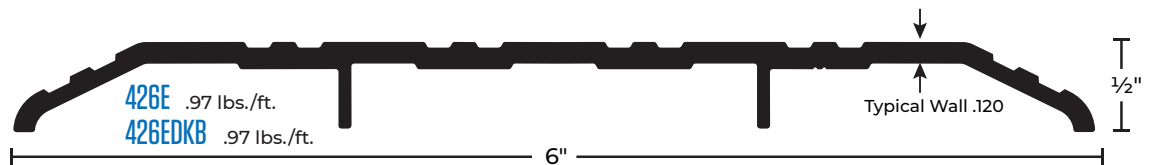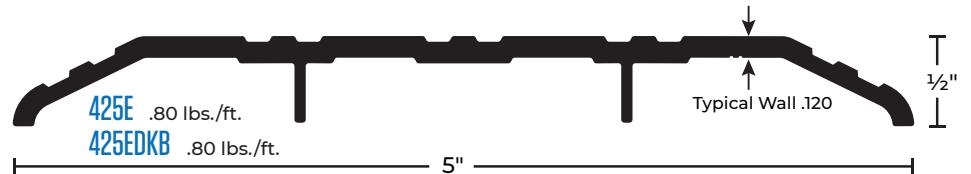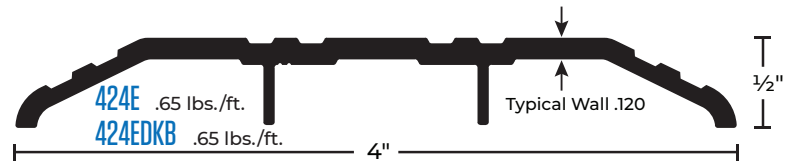

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/
Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH







For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS

- #10 x 1-½" FH Zinc-Plated
Wood Screws Furnished. Dark
Bronze Supplied With DKB.

SADDLE THRESHOLDS

All Products On This Page

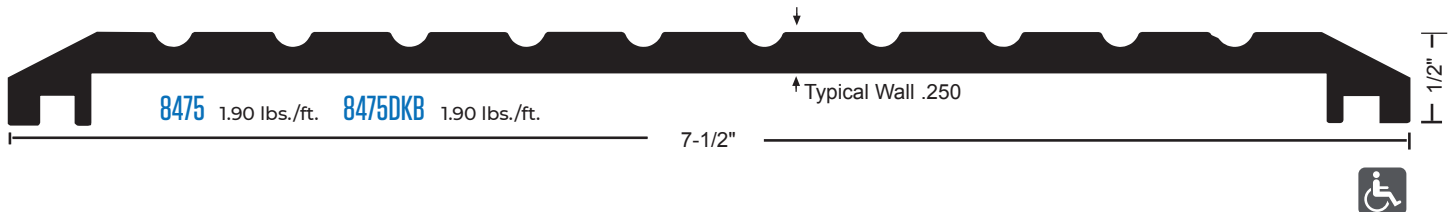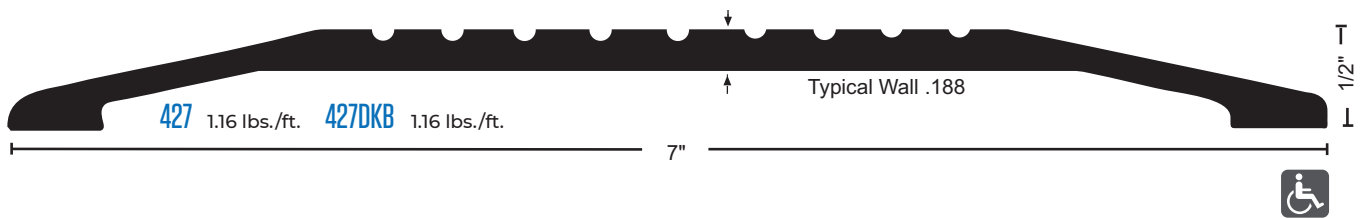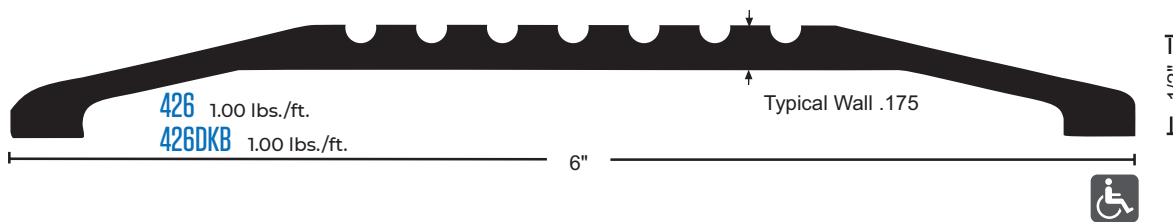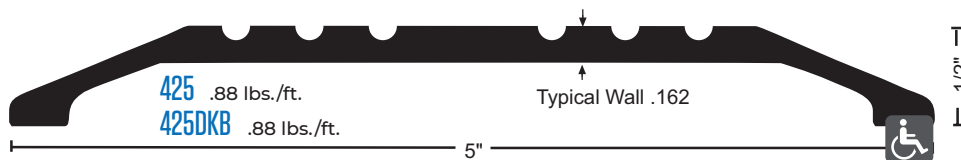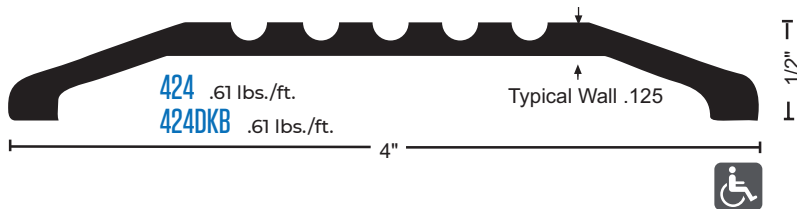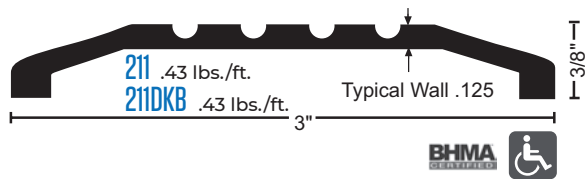

424
Mill Aluminum Saddle
Threshold, 1/2" x 4"

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated
Wood Screws Furnished. Dark
Bronze Supplied With DKB.


SADDLE THRESHOLDS

All Products On This Page




513


Mill Aluminum
Saddle Threshold,
1/4" x 5"




413 53 lbs./ft.
413DKB .53 lbs./ft.




513 .68 lbs./ft.
513DKB .68 lbs./ft.




613 .88 lbs./ft.
613DKB .88 lbs./ft.




713 1.01 lbs./ft
713DKB 1.01 lbs./ft.



813 1.20 lbs./ft
813DKB 1.20 lbs./ft.



913 1.41 lbs./ft
913DKB 1.41 lbs./ft.



1013 1.63 lbs./ft
1013DKB 1.63 lbs./ft.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/
Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH


For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS


- #10 x 1-1/2" FH Zinc-Plated
Wood Screws Furnished. Dark
Bronze Supplied With DKB.

SADDLE THRESHOLDS


All Products On This Page




434 .54 lbs./ft.
434DKB .54 lbs./ft.




435 .69 lbs./ft.
435DKB .69 lbs./ft.




436 .84 lbs./ft.
436DKB .84 lbs./ft.




437 .99 lbs./ft.
437DKB .99 lbs./ft.



438 1.14 lbs./ft.
438DKB 1.14 lbs./ft.



439 1.28 lbs./ft.
439DKB 1.28 lbs./ft.



440 1.43 lbs./ft.
440DKB 1.43 lbs./ft.

MATERIALS & FINISHES


- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized

FASTENERS


- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

EXTENDED WIDTH THRESHOLDS

All Products On This Page




8113 1.57 lbs./ft.
8113DKB 1.57 lbs./ft.



WA8113 1.55 lbs./ft.
WA8113DKB 1.55 lbs./ft.



8213 1.74 lbs./ft.
8213DKB 1.74 lbs./ft.

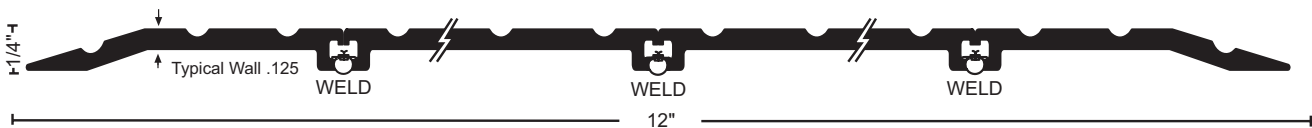

WA8213 2.27 lbs./ft.
WA8213DKB 2.27 lbs./ft.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS


- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

EXTENDED WIDTH THRESHOLDS

All Products On This Page



431 1.75 lbs./ft.
431DKB 1.75 lbs./ft.

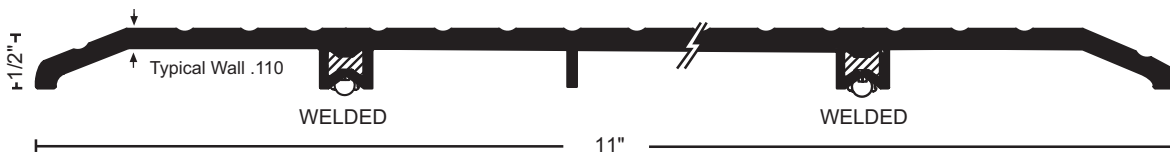

WA431 1.75 lbs./ft.
WA431DKB 1.75 lbs./ft.



432 1.87 lbs./ft.
432DKB 1.87 lbs./ft.



WA432 1.87 lbs./ft.
WA432DKB 1.87 lbs./ft.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS





- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

SMOOTH SURFACE THRESHOLDS

All Products On This Page



410
Mill Aluminum
Smooth Surface
Saddle Threshold,
1/4" x 2 1/2"

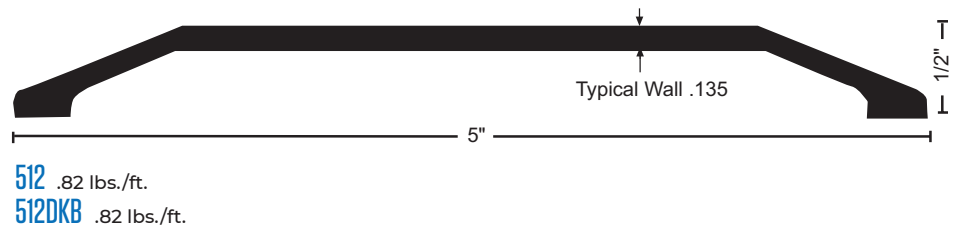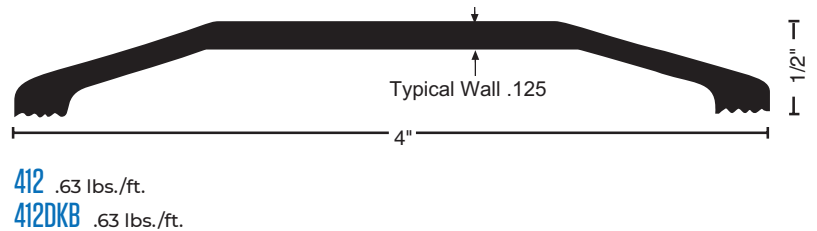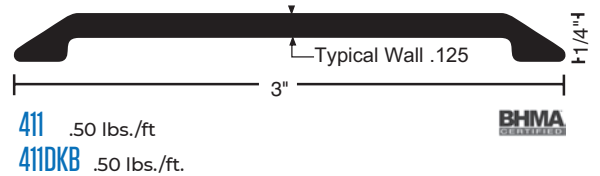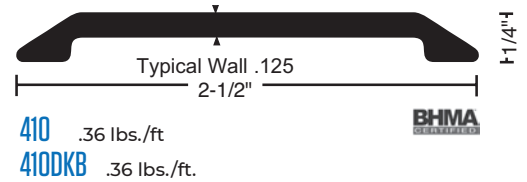

► Recommended to Provide the Best Results Where Automatic Door Bottoms are Used.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

HEAVY-DUTY THRESHOLDS

All Products On This Page




- For Use Where Forklift or Vehicular Traffic Occurs
- Recommended for Delivery/Storage Doorways
Where Heavier Loads Travel
- BHMA Certified To ANSI A156.21 Heavy-Duty
10,000 Lb. Load Test
- Optional SIA Slip-Resistant Finish Recommended
in Moisture Prone Areas



425HD


ADA Compliant
EXTRA Heavy-
Duty Aluminum
Threshold, 1/2" x 5"

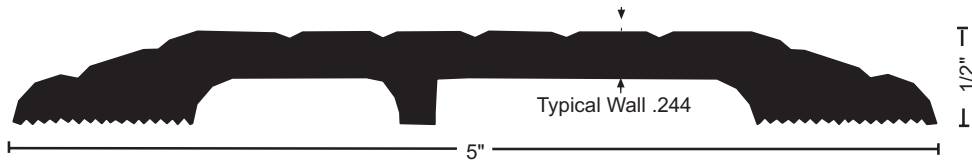


425HD 1.6 lbs./ft.
425HDOKB 1.6 lbs./ft.



513HD 1.4 lbs./ft.
513HDOKB 1.4 lbs./ft.

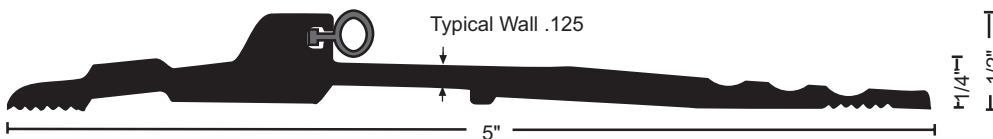

896HD 1.01 lbs./ft
896HDOKB 1.01 lbs./ft

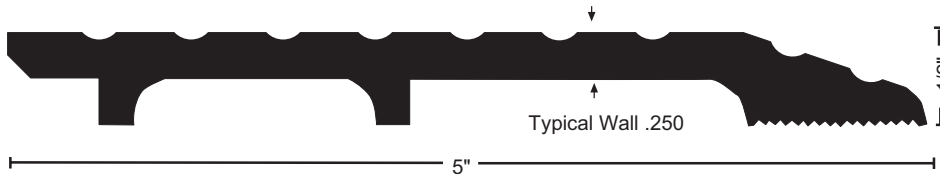

325HD 1.65 lbs./ft
325HDOKB 1.65 lbs./ft



BUMPER SEAL

Seals Against the Door to
Provide Weather Resistance

BUMPER SEAL OPTIONS

- V Vinyl**
- N Neoprene
- S Silicone

**Vinyl ("V") Supplied Unless Other
Material Specified



* When Installed With the
Non-Beveled Edge Flush
With Flooring, or Where
No Greater Than 1/4"
Vertical Rise Occurs

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/
Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated
Wood Screws Furnished. Dark
Bronze Supplied With DKB.

HEAVY-DUTY THRESHOLDS


All Products On This Page



- ▶ For Use Where Forklift or Vehicular Traffic Occurs
- ▶ Recommended for Delivery/Storage Doorways Where Heavier Loads Travel
- ▶ Optional SIA Slip-Resistant Finish Recommended in Moisture Prone Areas


613HD

ADA Compliant
Heavy-Duty
Aluminum Threshold,
¾" x 6"

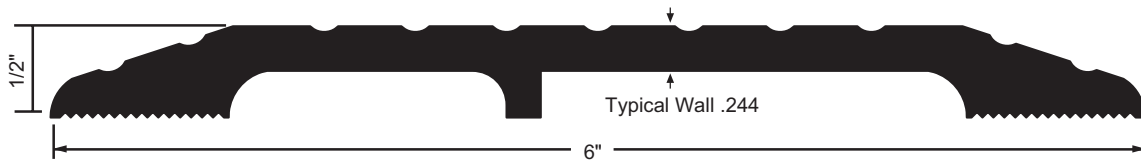

426HD 1.98 lbs./ft.

426HDDKB 1.98 lbs./ft.

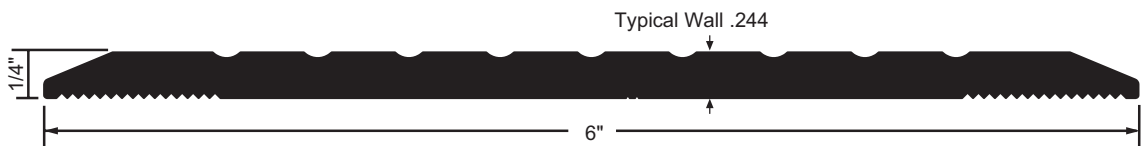


613HD 1.66 lbs./ft.

613HDDKB 1.66 lbs./ft.



BHMA Certified to ANSI/BHMA A156.21
Heavy-Duty 10,000 lb. Load Test

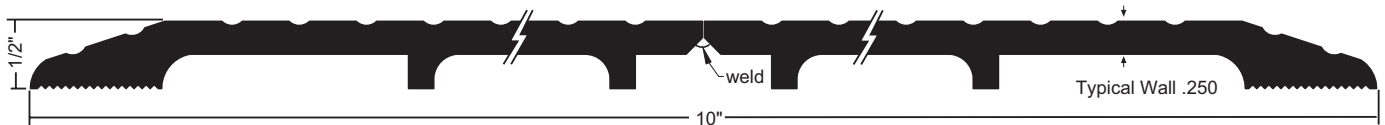

325HD x 325HD Welded 3.33 lbs./ft.

325HDDKB x 325HDDKB Welded 3.33 lbs./ft.



BHMA Certified to ANSI/BHMA A156.21
Heavy-Duty 10,000 lb. Load Test

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.


FASTENERS

- #10 x 1-½" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.


BUMPER SEAL THRESHOLD

ADJUSTABLE ADA COMPLIANT

All Products On This Page

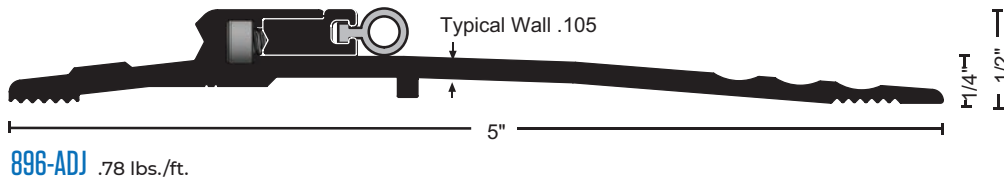

- ▶ Stainless Steel Adjustment Screws on 10" Centers
Allow Adjustment Without Re-Positioning
Mounting Location
- ▶ Adjusting Range $\frac{1}{4}$ "
- ▶ Adjust Seal Using $\frac{7}{64}$ " Allen Wrench

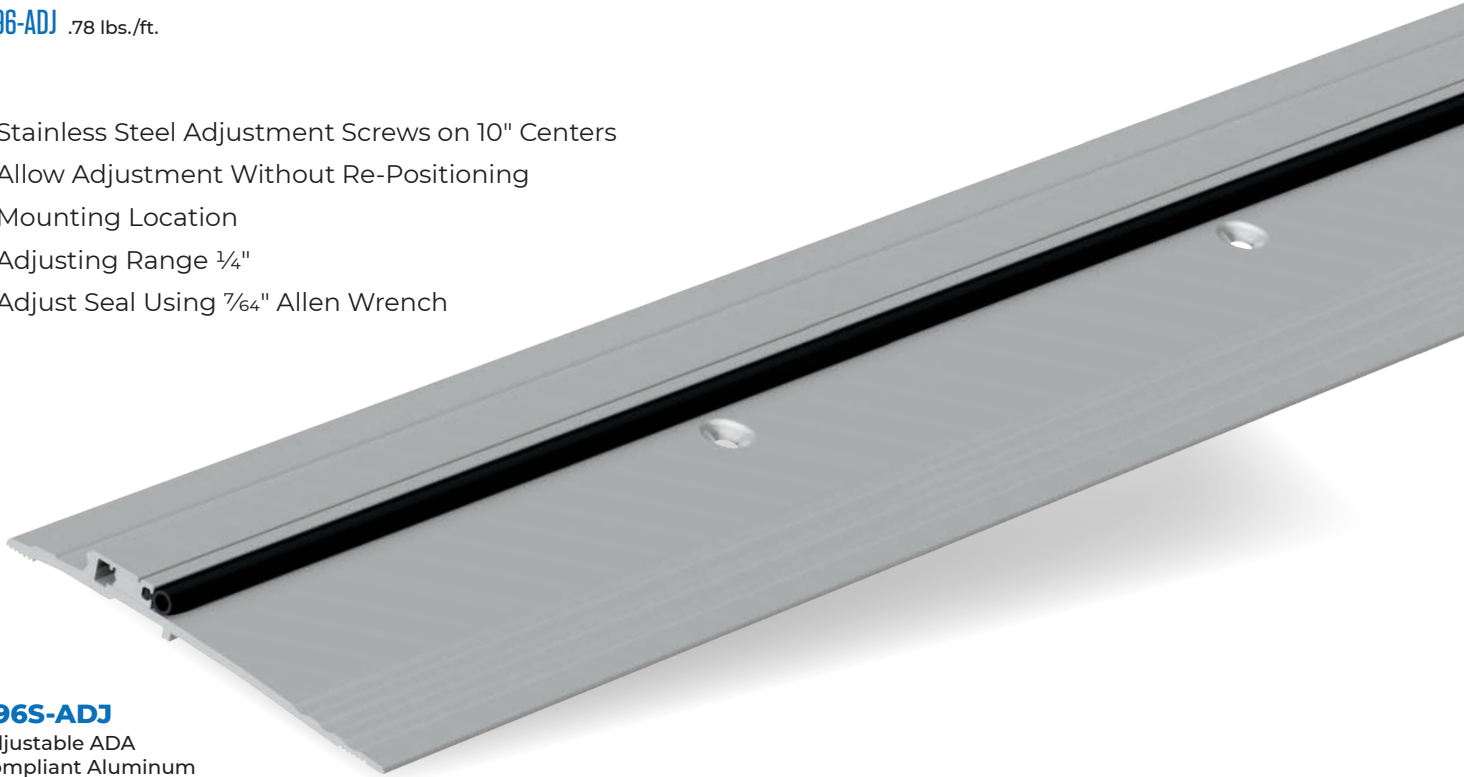

896S-ADJ

Adjustable ADA
Compliant Aluminum
Bumper Threshold,
 $\frac{1}{2}$ " x 5" with Silicone
Bumper Seal

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/
Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS

- #10 x 1- $\frac{1}{2}$ " FH Zinc-Plated
Wood Screws Furnished. Dark
Bronze Supplied With DKB.



BUMPER SEAL

Seals Against the Door to
Provide Weather Resistance

BUMPER SEAL OPTIONS

- | | |
|----------|----------|
| V | Vinyl** |
| N | Neoprene |
| S | Silicone |

**Vinyl ("V") Supplied Unless Other
Material Specified




OPTIONAL SILICONE BUMPER SEAL "S"

Provides an STC
Rating of STC 52

BUMPER SEAL THRESHOLDS


ADA COMPLIANT

All Products In This Section

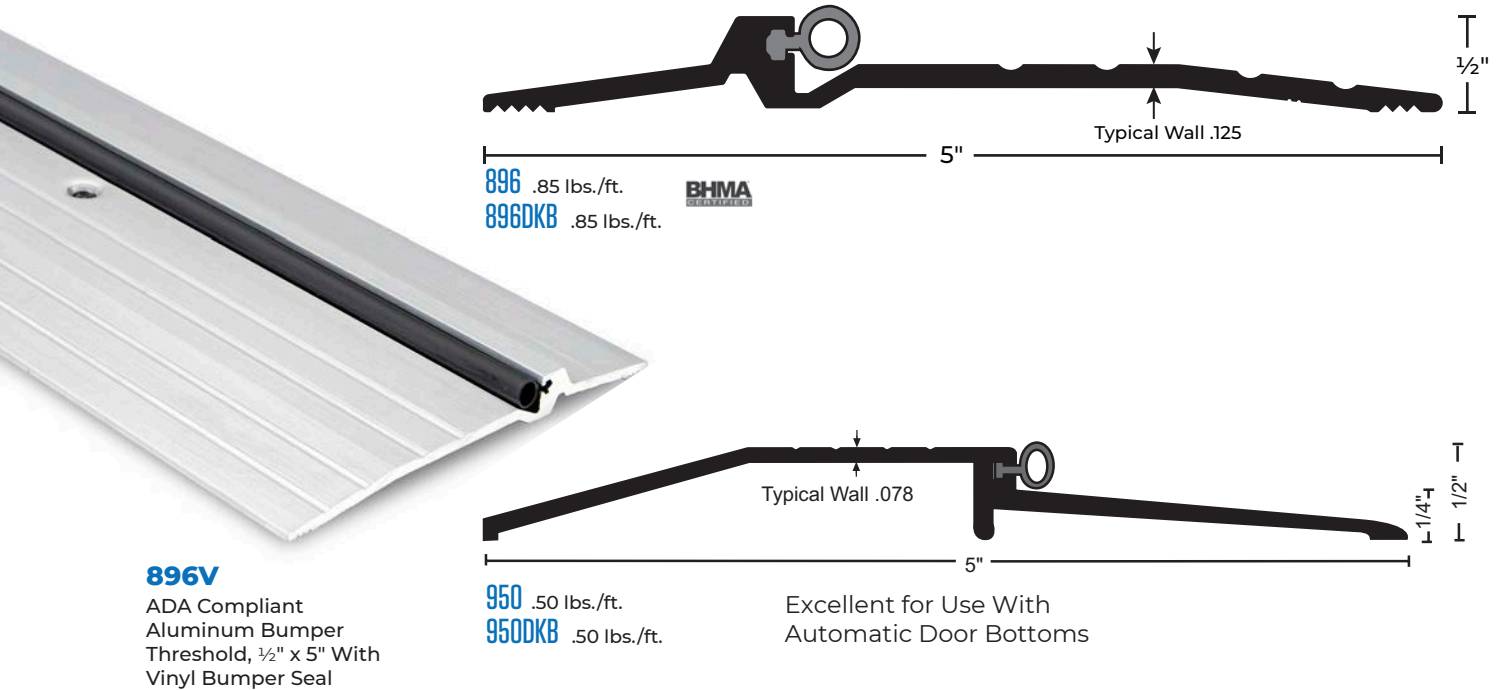

STOP STRIPS

All Products In This Section

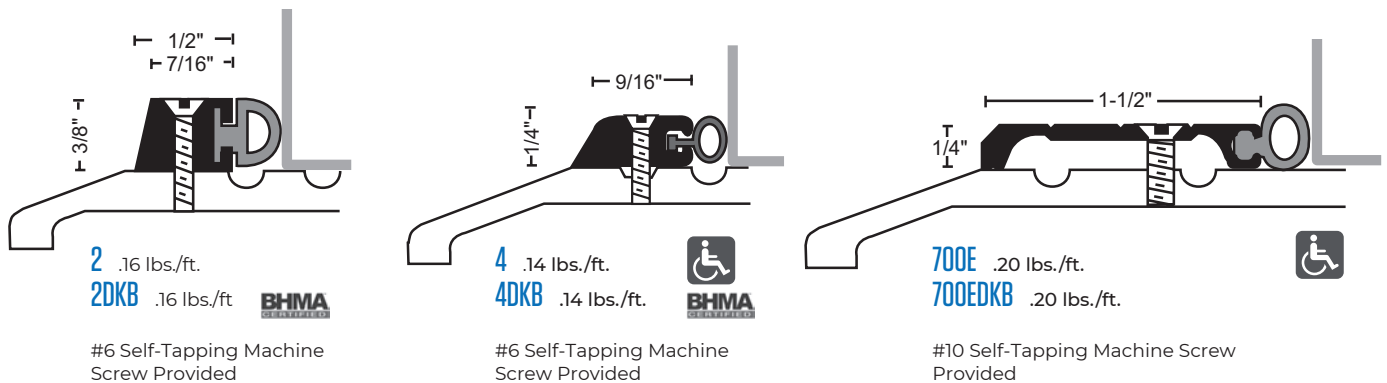

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



BUMPER SEAL

Seals Against the Door to Provide Weather Resistance

BUMPER SEAL OPTIONS

- V** Vinyl**
- N** Neoprene
- S** Silicone

**Vinyl ("V") Supplied Unless Other Material Specified


BUMPER SEAL THRESHOLDS

All Products On This Page




897S

Aluminum & Silicone
Bumper Seal
Threshold, 1" x 4"

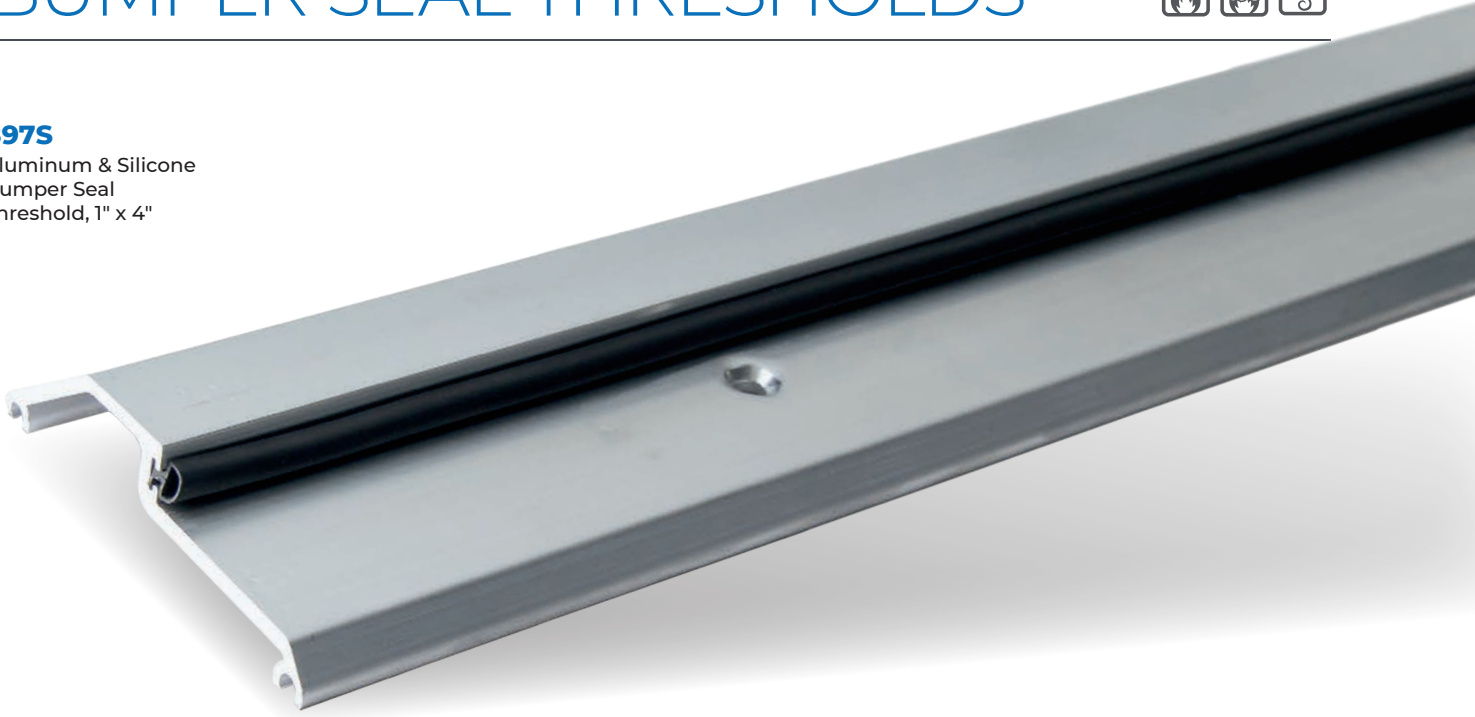

8135 .60 lbs./ft.

8135DKB .60 lbs./ft.

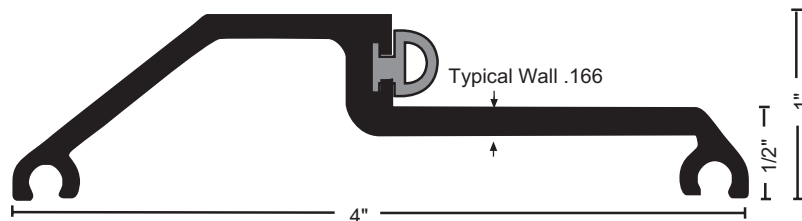

897 .91 lbs./ft.

897DKB .91 lbs./ft.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



BUMPER SEAL

Seals Against the Door to Provide Weather Resistance

BUMPER SEAL OPTIONS

- V** Vinyl**
- N** Neoprene
- S** Silicone

**Vinyl ("V") Supplied Unless Other Material Specified





BUMPER SEAL THRESHOLDS

All Products On This Page



804V

Mill Aluminum, Vinyl
Bumper Seal Threshold,
7/8" x 5"

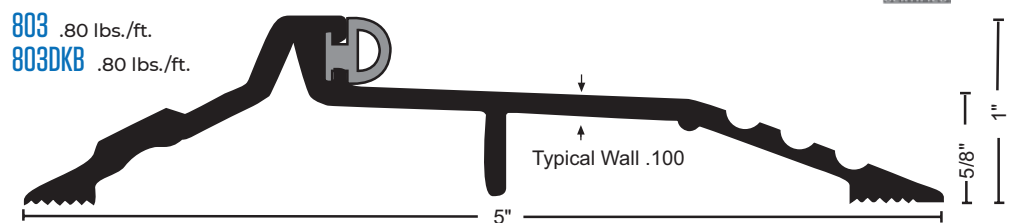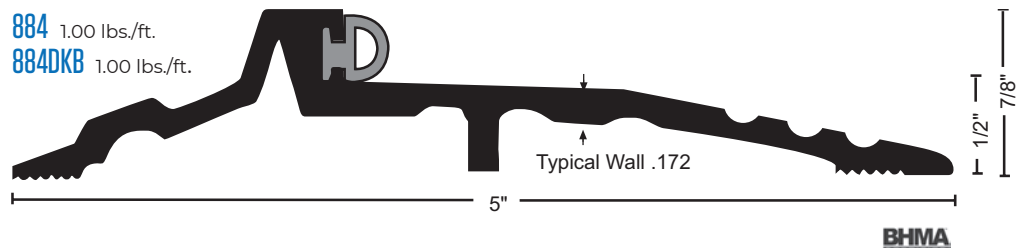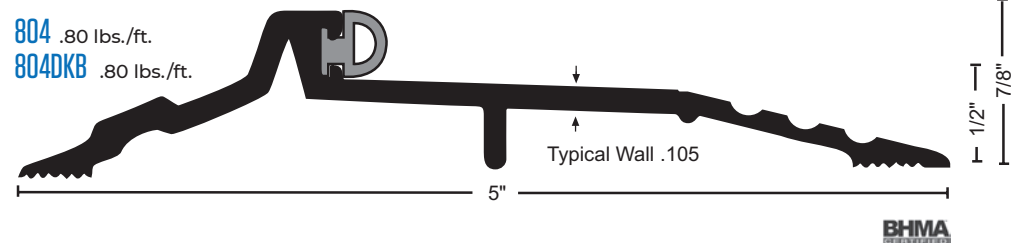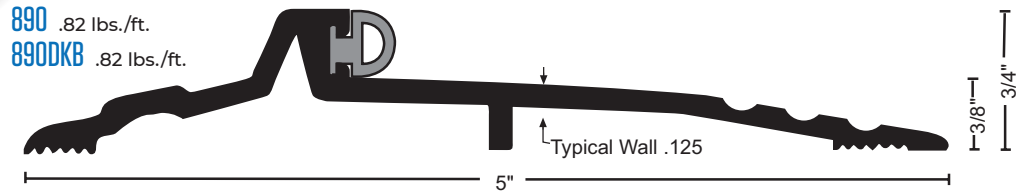

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/
Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated
Wood Screws Furnished. Dark
Bronze Supplied With DKB.



BUMPER SEAL

Seals Against the Door
to Provide Weather
Resistance


BUMPER SEAL OPTIONS

- V** Vinyl**
- N** Neoprene
- S** Silicone

**Vinyl ("V") Supplied Unless Other
Material Specified

OFFSET THRESHOLDS



All Products in this Section

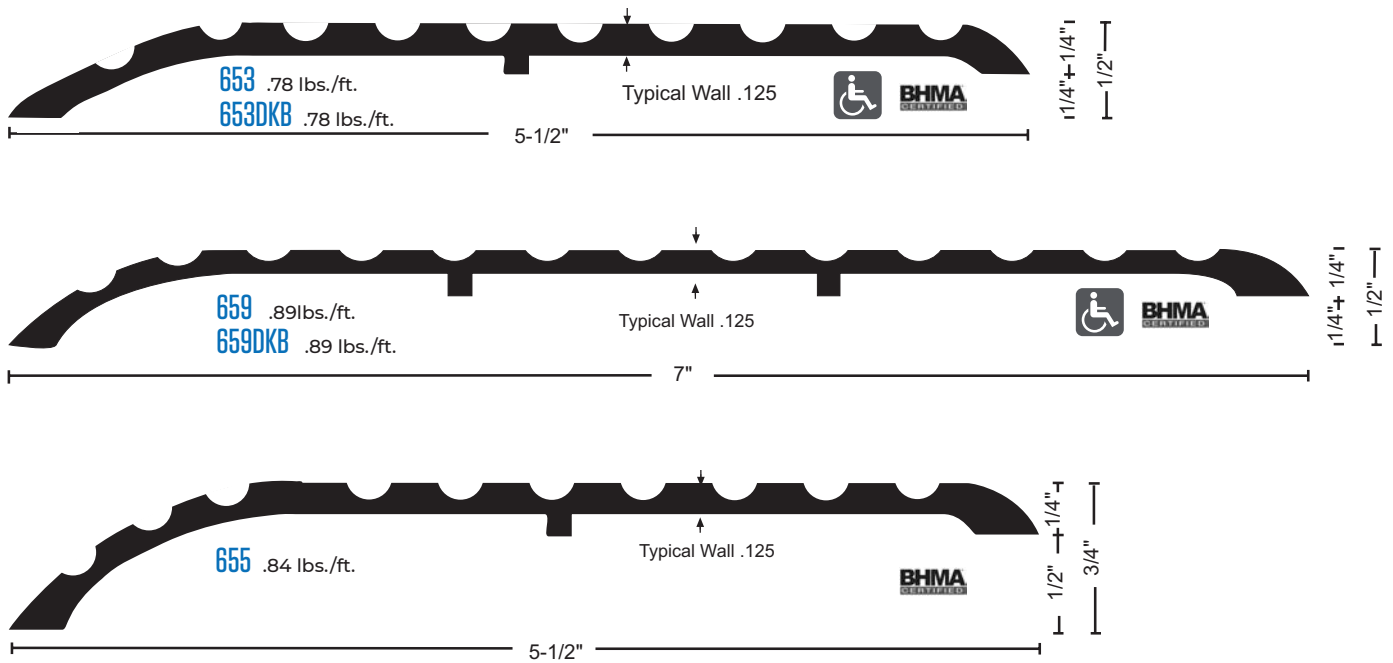

CARPET AND TILE DIVIDERS AND EDGES

CARPET AND TILE DIVIDERS

CARPET EDGES

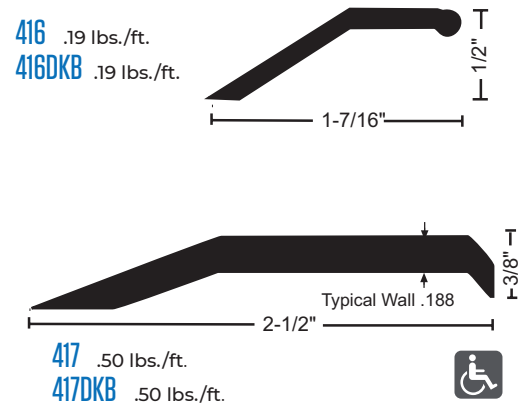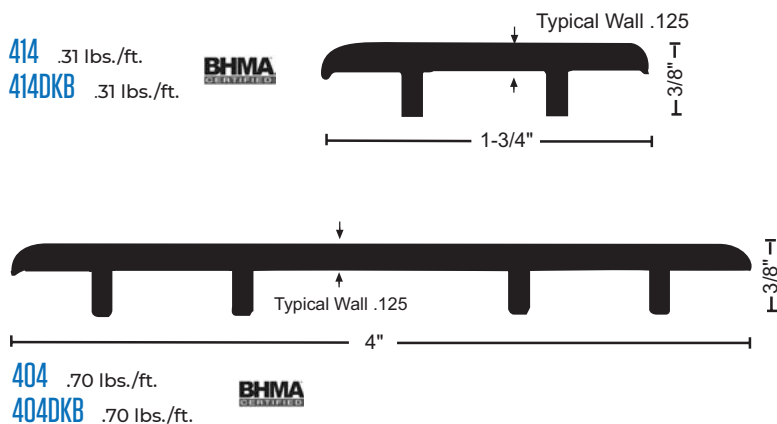

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

DIVIDER THRESHOLDS

VINYL CARPET/TILE

All Products On This Page









- ▶ For Transition Between Two Different Carpets or Carpet to Tile.
- ▶ Easy to Install Using Adhesive Like NGP RR5007BL, Black RTV Silicone Rubber Construction Sealant
- ▶ Each Tube Bonds 4' of 398 or 399, 8' of 400 or 401, 12' of 402, or 15' of 407.



407
Hospitality Vinyl
Carpet/Tile Divider
Threshold, $\frac{3}{4}$ " x $2\frac{3}{4}$ "

* When Installed as Illustrated
Between Carpet and/or Tile

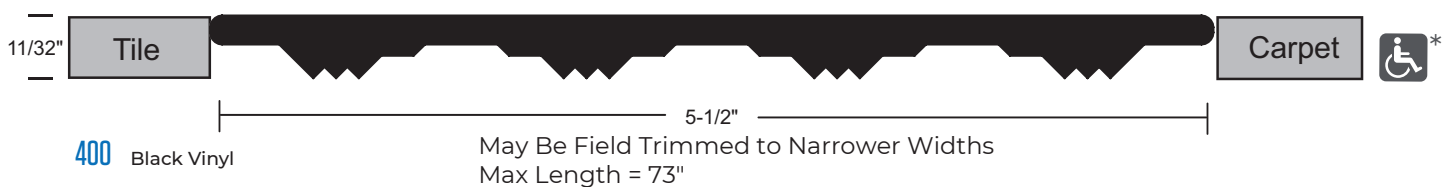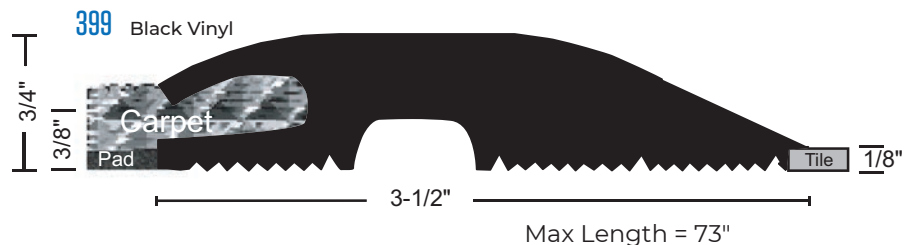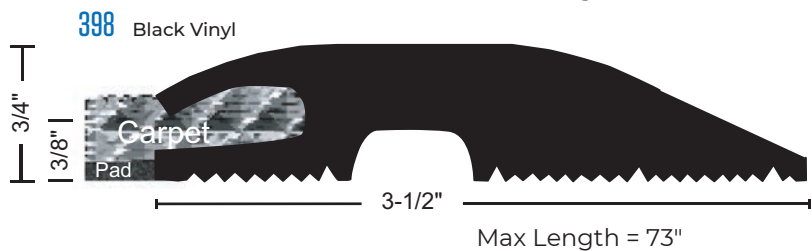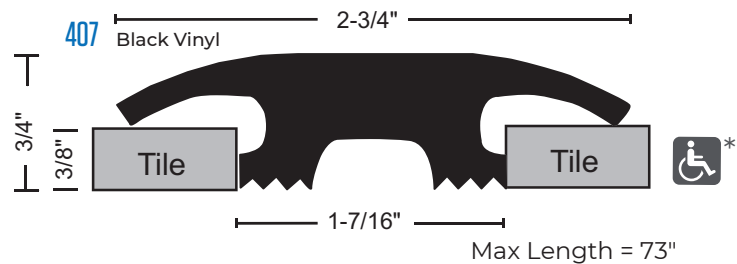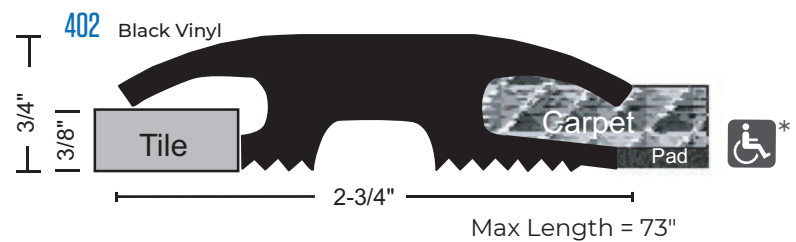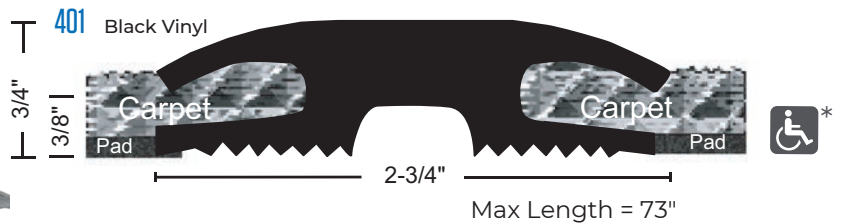

DIVIDER THRESHOLDS

COMMUNICATING DOOR


All Products On This Page




- ▶ For Transition Between Two Different Carpets
- ▶ Easy to Install Using Adhesive Like NGP RR5007BL, Black RTV Silicone Rubber Construction Sealant
- ▶ Each Tube Bonds 12' of 402, or 8' of 400

** ADA Compliant When Installed as Illustrated Between Carpet*

402x400x400x402 Black Vinyl

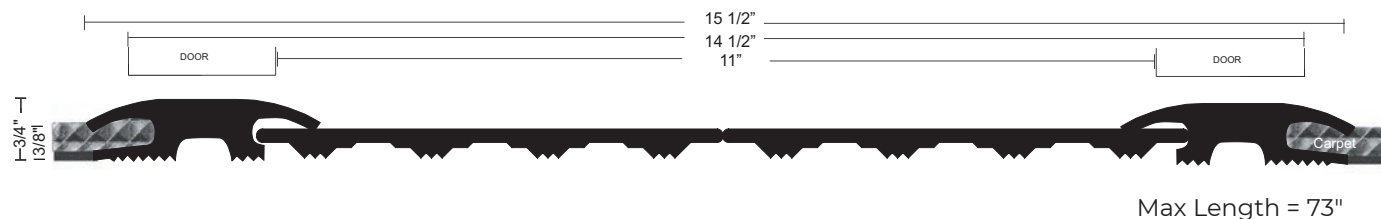

402x400x402 Black Vinyl

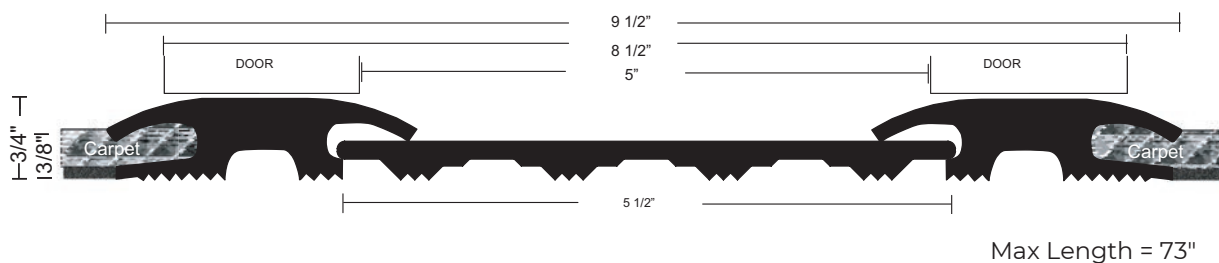

COMPONENTS

TRANSITION STRIPS, HALF SADDLE AND EXTENDED WIDTHS

All Products On This Page



TRANSITION STRIPS

- Heavy-Duty - For Transition at Edge of $\frac{1}{8}$ " or $\frac{3}{8}$ " Tile
- Protects Edge of Tile
- Reduces Tripping Hazard
- Available in 96" Length Only
- $\frac{1}{4}$ x $1\frac{3}{4}$ FH Concrete Anchor x T-27 (10 each furnished)

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized




OPTIONAL SIA SLIP-RESISTANT FINISH


For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x $1\frac{1}{2}$ " FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.





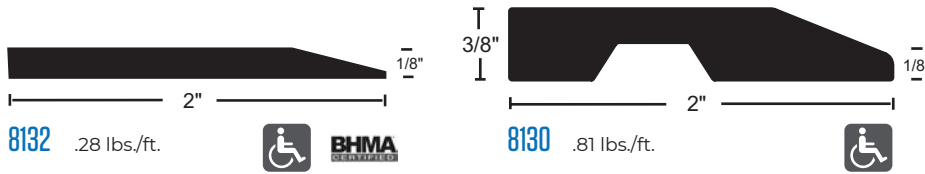


HALF SADDLE AND EXTENDED WIDTH COMPONENTS

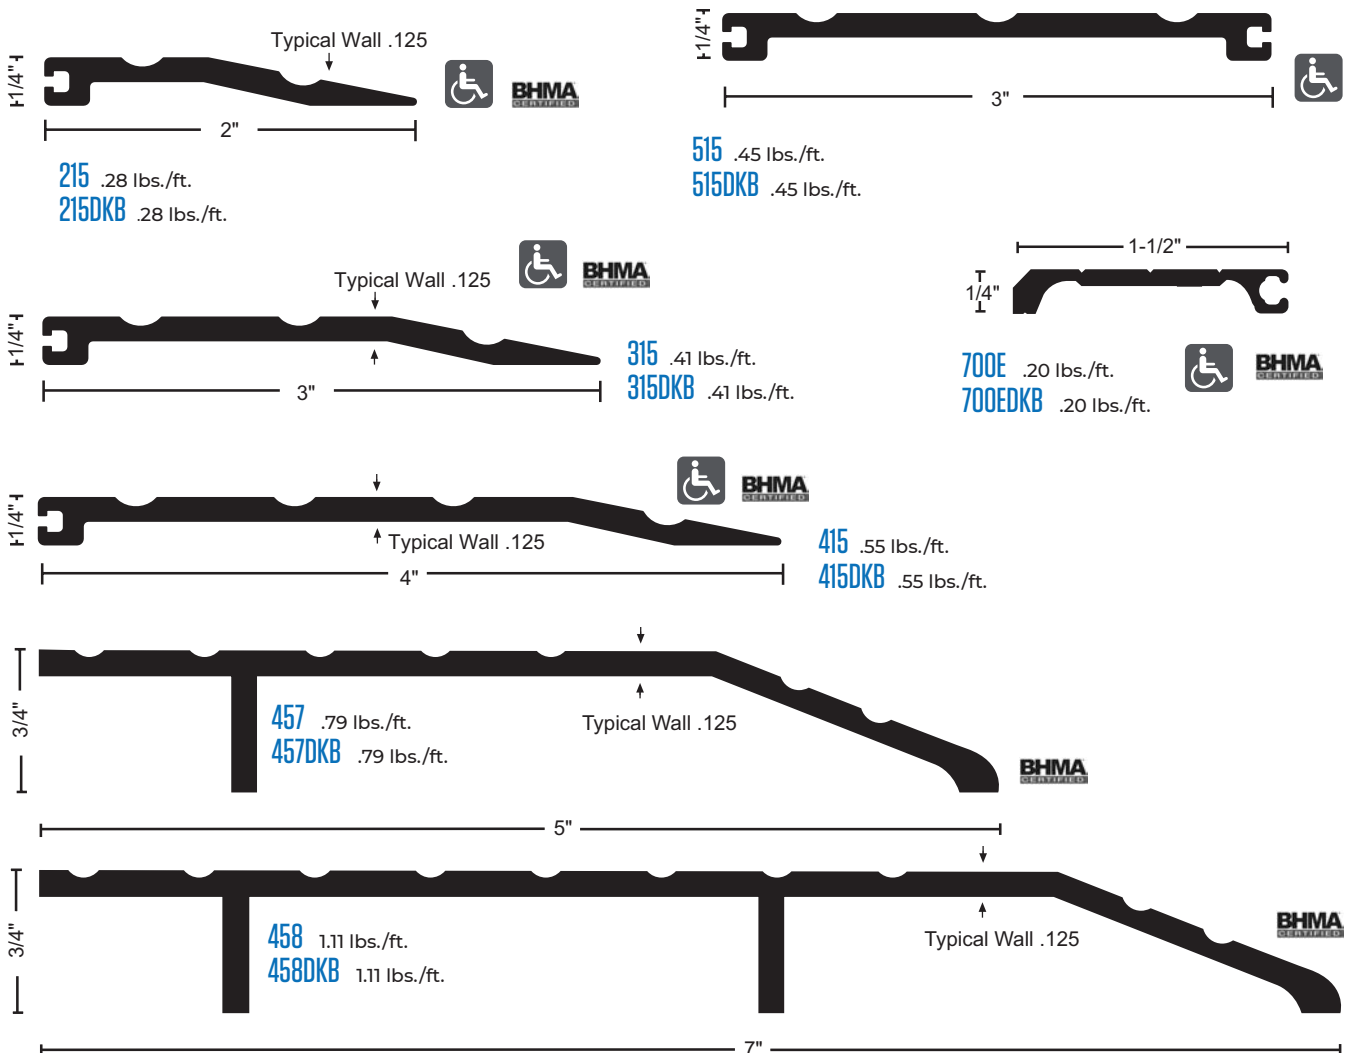

HALF SADDLE THRESHOLDS

All Products On This Page

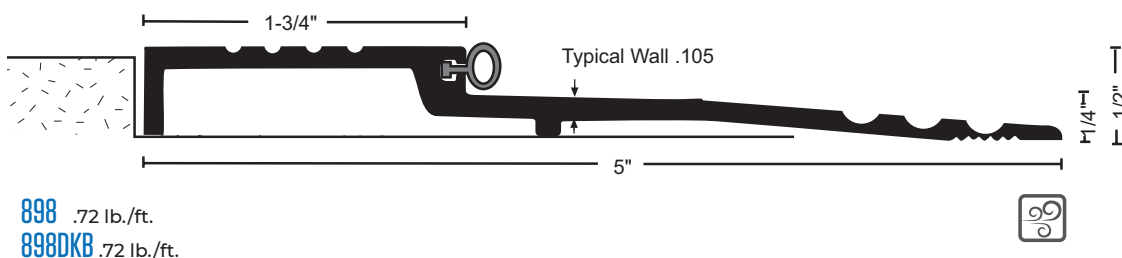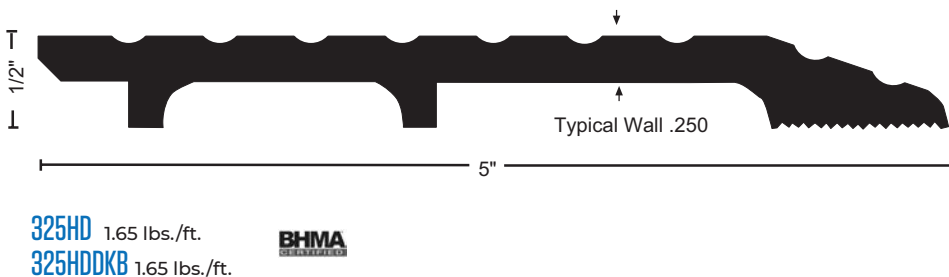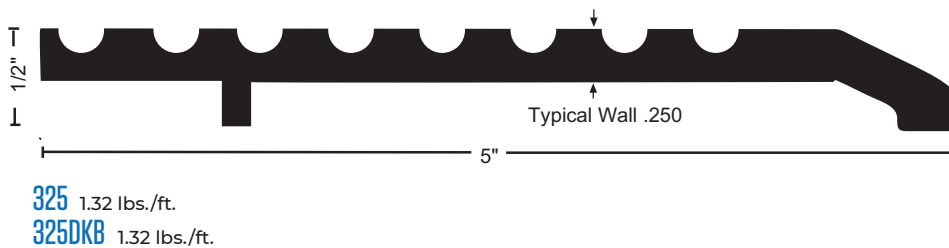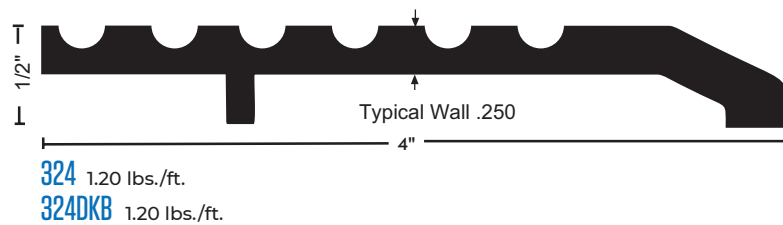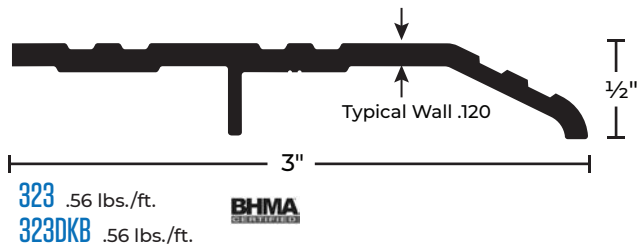

BUMPER SEAL
Seals Against the Door to Provide Weather Resistance

BUMPER SEAL OPTIONS

- V** Vinyl**
- N** Neoprene
- S** Silicone

**Vinyl ("V") Supplied Unless Other Material Specified

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized

OPTIONAL SIA SLIP-RESISTANT FINISH
For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS


- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

* When Installed With the Non-Beveled Edge Flush with Flooring, or Where No Greater Than 1/4" Vertical Rise Occurs


HALF SADDLE THRESHOLDS

HALF SADDLE AND EXTENDED WIDTH COMPONENTS


All Products On This Page

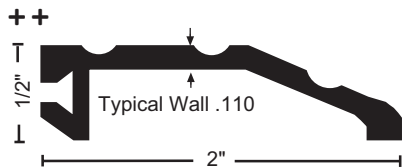


321 .34 lbs./ft.
321DKB .34 lbs./ft.

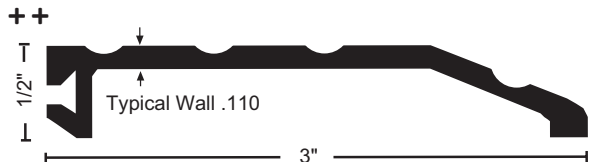

322 .48 lbs./ft.
322DKB .48 lbs./ft.

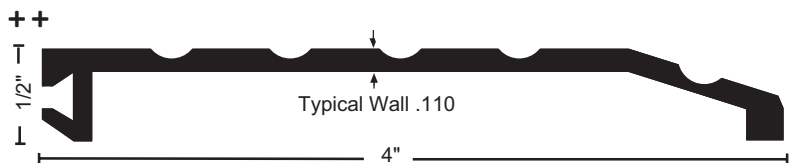


327 .60 lbs./ft.
327DKB .60 lbs./ft.

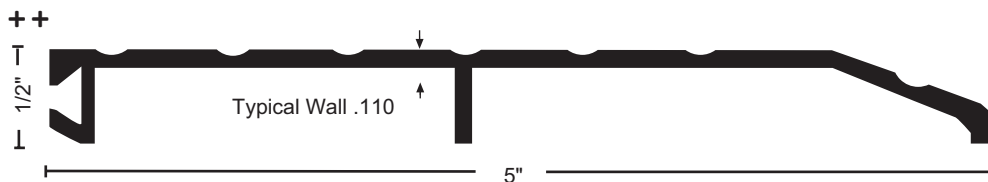

350 .83 lbs./ft.
350DKB .83 lbs./ft.



355 .79 lbs./ft.
355DKB .79 lbs./ft.

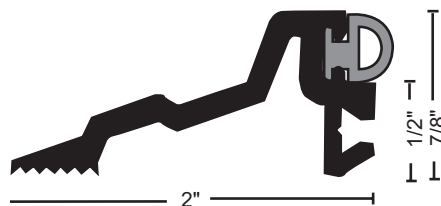

884B/S .48 lbs./ft.
884B/SDKB .48 lbs./ft.



MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



* When Installed With the Non-Beveled Edge Flush with Flooring, or Where No Greater Than 1/4" Vertical Rise Occurs

++ Designed for Thermal Break. Bumper Seal Not Available.



BUMPER SEAL

Seals Against the Door to Provide Weather Resistance

BUMPER SEAL OPTIONS


- V** Vinyl**
- N** Neoprene
- S** Gray Silicone

**Vinyl ("V") Supplied Unless Other Material Specified

EXTENDED WIDTH THRESHOLDS

- Create Wider Saddle or Half Saddle Thresholds, Choosing Components from Previous Page
- Furnished With Aluminum Spline for Field Assembly


EXAMPLES - HOW TO ORDER:

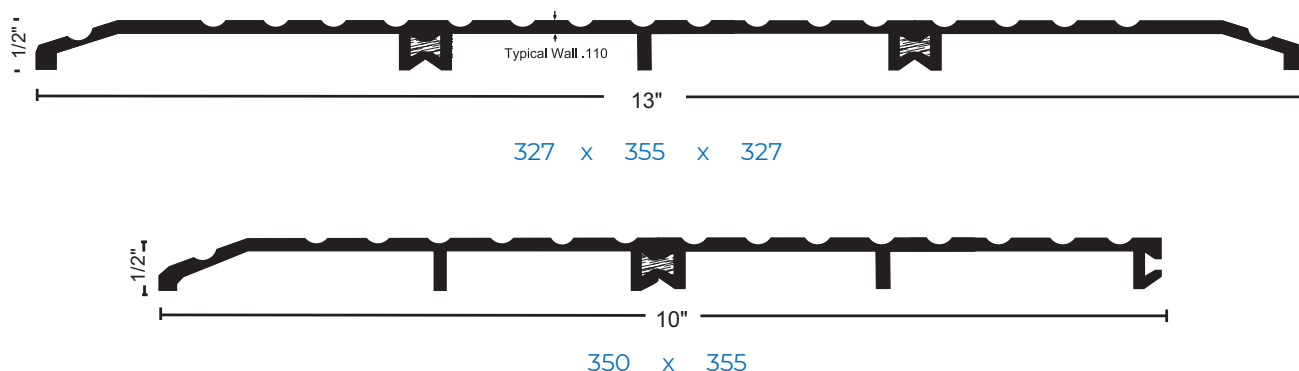

THERMAL BREAK EXTENDED WIDTH THRESHOLDS

- Create Wider Thermal Break Thresholds For Non-Fire-Rated Applications Using Components from Previous Page
- Furnished With Rigid Thermoplastic Thermal Break Spline for Field Assembly - Indicate "TH" Where Required

EXAMPLES - HOW TO ORDER:

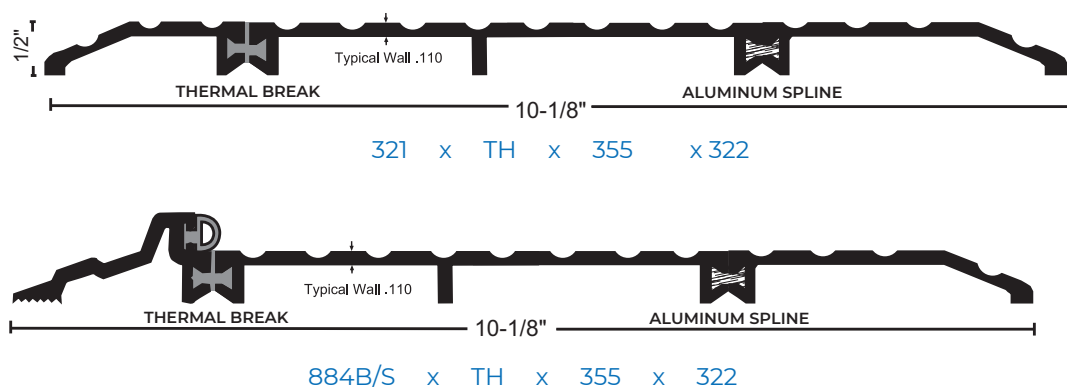








THERMAL BREAK

SADDLE THRESHOLDS

All Products On This Page



Thermal Break Thresholds Feature a Rigid Thermoplastic Spline, Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold.

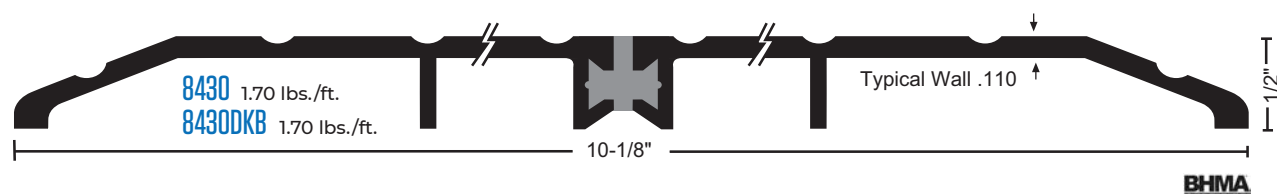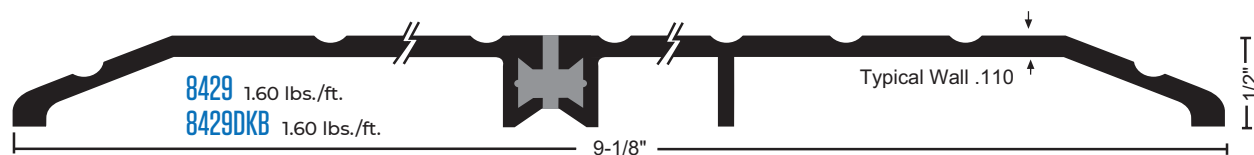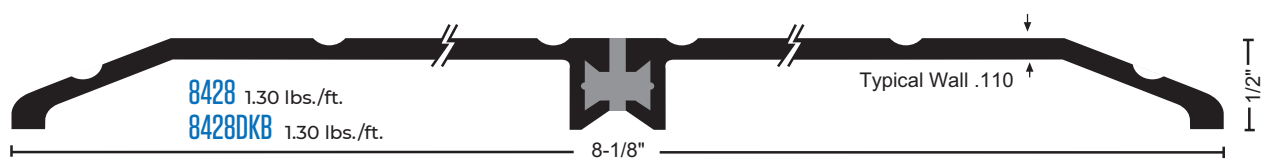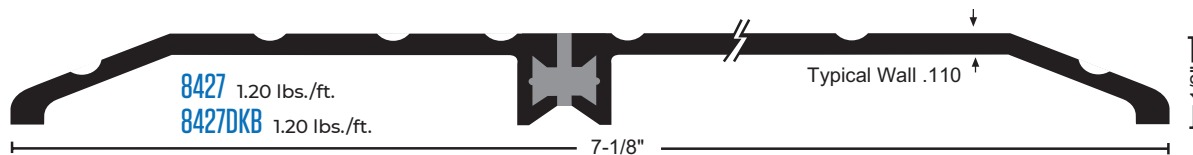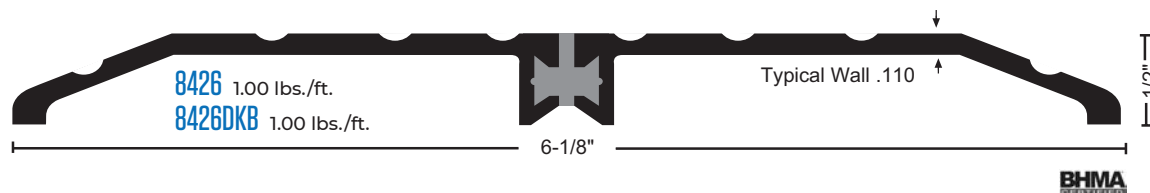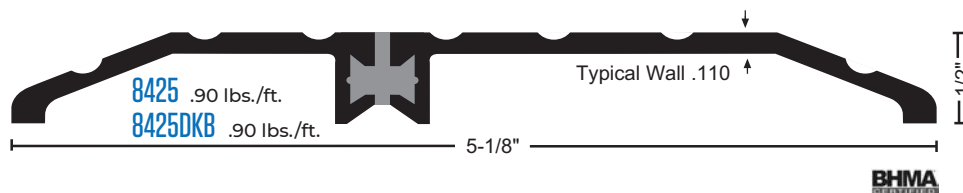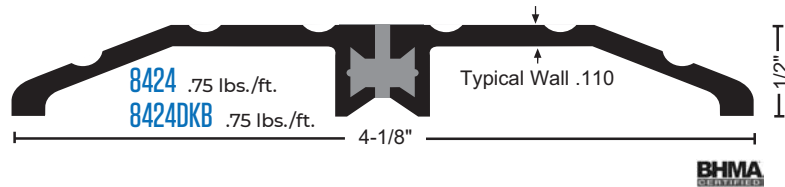

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

THERMAL BREAK

SADDLE THRESHOLDS

All Products On This Page



Thermal Break Thresholds Feature a Rigid Thermoplastic Spline, Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized




OPTIONAL SIA SLIP-RESISTANT FINISH


For Use in Areas Where Conditions Can Be Hazardous and Safety is a Priority.

FASTENERS


- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.




8413 .57 lbs./ft.
8413DKB .57 lbs./ft.




8513 .70 lbs./ft.
8513DKB .70 lbs./ft.



8613 .83 lbs./ft.
8613DKB .83 lbs./ft.



8713 .97 lbs./ft.
8713DKB .97 lbs./ft.



8813 1.11 lbs./ft.
8813DKB 1.11 lbs./ft.



8913 1.29 lbs./ft.
8913DKB 1.29 lbs./ft.



8013 1.42 lbs./ft.
8013DKB 1.42 lbs./ft.

THERMAL BREAK

SADDLE AND BUMPER SEAL THRESHOLDS

All Products On This Page



THERMAL BREAK SADDLE THRESHOLDS

Thermal Break Thresholds Feature a Rigid Thermoplastic Spline, Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold.



8113 1.57 lbs./ft.
8113DKB 1.57 lbs./ft.




8213 1.74 lbs./ft.
8213DKB 1.74 lbs./ft.

THERMAL BREAK BUMPER SEAL THRESHOLDS


Thermal Break Thresholds Feature a Rigid Thermoplastic Spline, Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold.




8433 .69 lbs./ft.
8433DKB .69 lbs./ft.



8423 .41 lbs./ft.
8423DKB .41 lbs./ft.

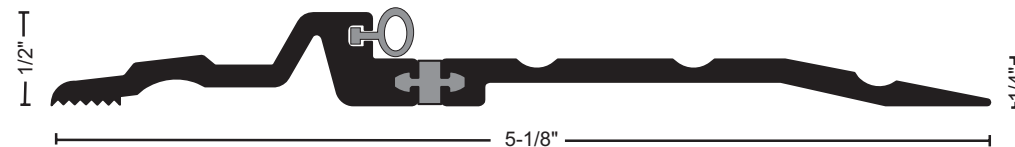

8533 .83 lbs./ft.
8533DKB .83 lbs./ft.

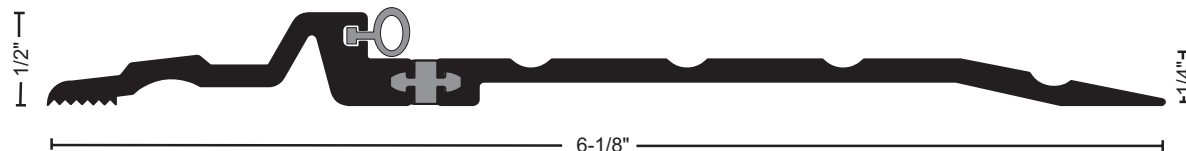

8633 .97 lbs./ft.
8633DKB .97 lbs./ft.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



BUMPER SEAL

Seals Against the Door to Provide Weather Resistance

BUMPER SEAL OPTIONS

- V** Vinyl**
- N** Neoprene
- S** Silicone

**Vinyl ("V") Supplied Unless Other Material Specified

THERMAL BREAK


BUMPER SEAL THRESHOLDS

All Products On This Page




THERMAL BREAK BUMPER SEAL THRESHOLDS

Thermal Break Thresholds Feature a Rigid Thermoplastic Spline, Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold.

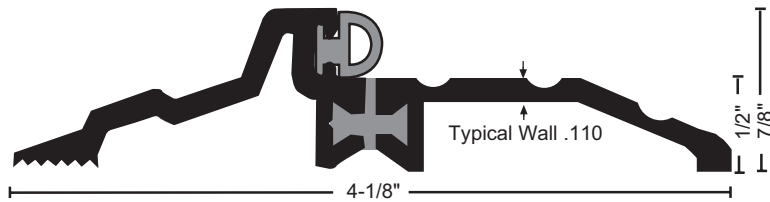


8434 .82 lbs./ft.

8434DKB .82 lbs./ft.

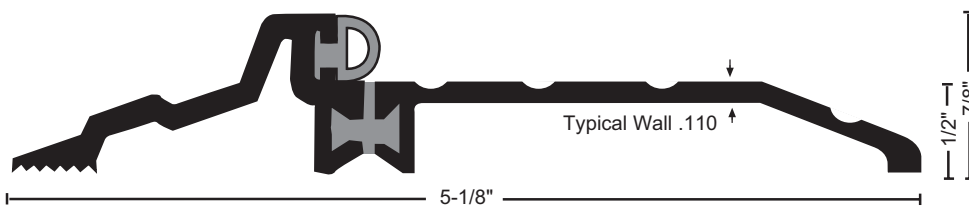


8435 .95 lbs./ft.

8435DKB .95 lbs./ft.

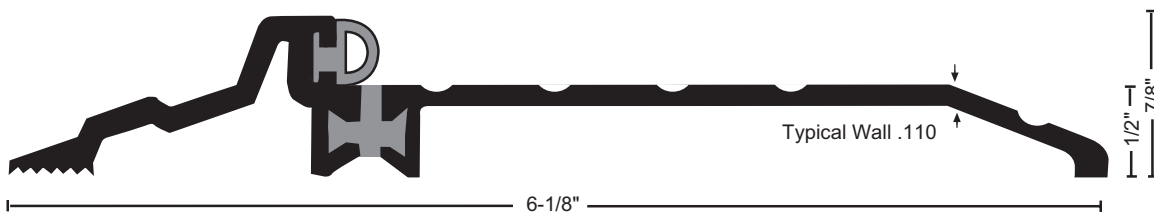

8436 1.11 lbs./ft.

8436DKB 1.11 lbs./ft.

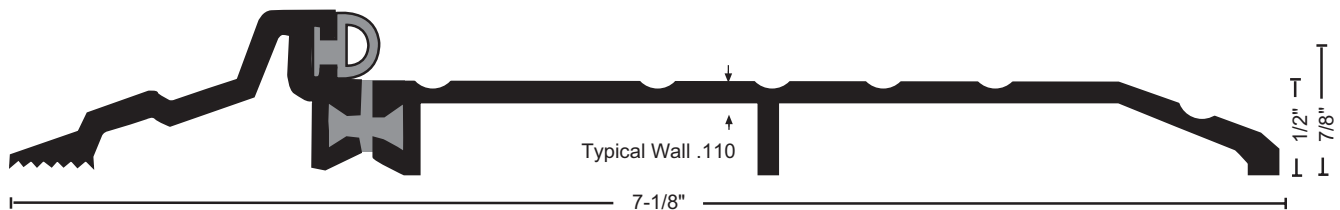

8437 1.29 lbs./ft.

8437DKB 1.29 lbs./ft.



BUMPER SEAL

Provides Weather Resistance

BUMPER SEAL OPTIONS

V Vinyl**

N Neoprene

S Silicone

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

**Vinyl ("V") Supplied Unless Other Material Specified

EXTENDED WIDTH

BUMPER SEAL THRESHOLDS

All Products On This Page




EXTENDED WIDTH BUMPER SEAL THRESHOLDS



884-6	1.10 lbs./ft.	6"
884-6DKB	1.10 lbs./ft.	
884-7	1.31 lbs./ft.	7"
884-7DKB	1.31 lbs./ft.	
884-8	1.52 lbs./ft.	8"
884-8DKB	1.52 lbs./ft.	

VINYL TOP THRESHOLDS

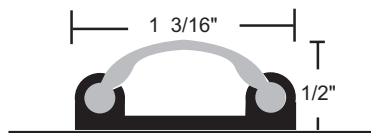

12V	.31 lbs./ft.
12VDKB	.31 lbs./ft.

ELEVATORS

Elevators Are Used Under Thresholds to Increase the Rise of the Threshold or Accommodate Offset Floor Conditions.



58	.16 lbs./ft.
58DKB	.16 lbs./ft.



MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



BUMPER SEAL

Provides Weather Resistance

BUMPER SEAL OPTIONS

V	Vinyl**
N	Neoprene
S	Silicone


**Vinyl ("V") Supplied Unless Other Material Specified

ALUMINUM RAMPS

All Products This Section



Illustrations Shown at 50%
Slope = 1:12

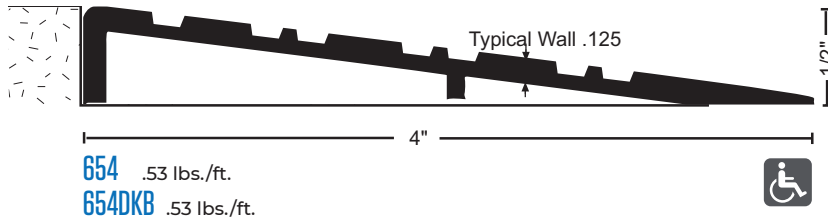


MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH



For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

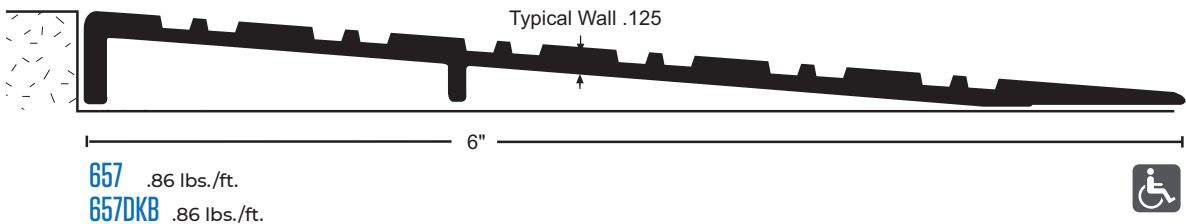

INTERLOCKING RUBBER RAMPS

- Supplied With Beveled Ends (End Slope = 1:2).
Specify if Straight Cut Is Required.
- Rubber Ramp Sections May Be Combined With Aluminum Ramp Components for Higher Rises, or With 6" Flat Aluminum Interlocking Threshold #957 for Offset Conditions.
- Black Silicone Adhesive Available to Secure Ramps Without Fasteners. Specify RR5007BL, Each Tube Will Secure 2 Ramps 12" Wide X 36" Long (6 Square Feet).

Illustrations Shown at 50%
Slope = 1:12

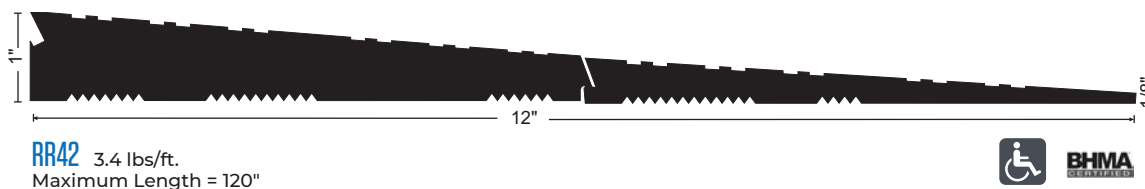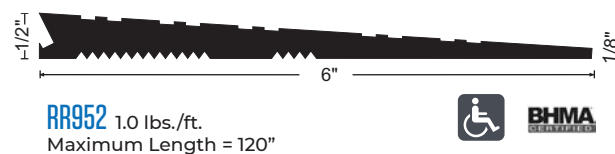

INTERLOCKING RAMPS


ADA COMPLIANT

All Products On This Page




Illustrations Shown at 50%
Slope = 1:12

R50 .94 lbs./ft.
R50DKB .94 lbs./ft.



R75 1.63 lbs./ft.
R75DKB 1.63 lbs./ft.



R100 2.06 lbs./ft.
R100DKB 2.06 lbs./ft.




R125 2.77 lbs./ft.
R125DKB 2.77 lbs./ft.




R150 3.82 lbs./ft.
R150DKB 3.82 lbs./ft.




R175 4.53 lbs./ft.
R175DKB 4.53 lbs./ft.

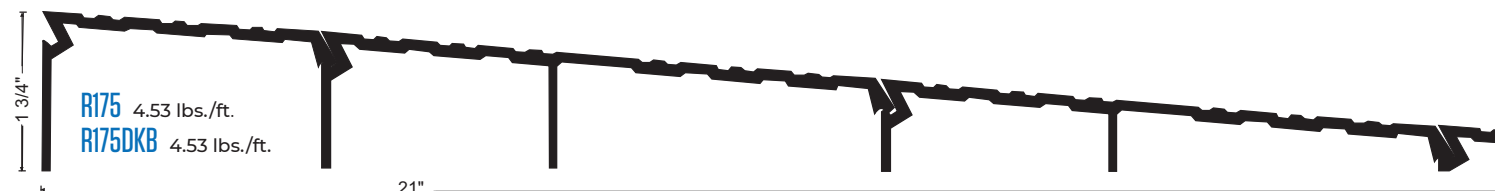


R200 5.58 lbs./ft.
R200DKB 5.58 lbs./ft.

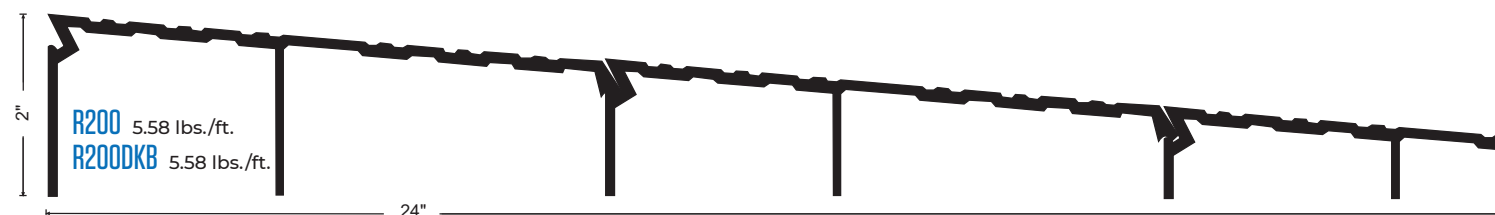

R225 6.37 lbs./ft.
R225DKB 6.37 lbs./ft.

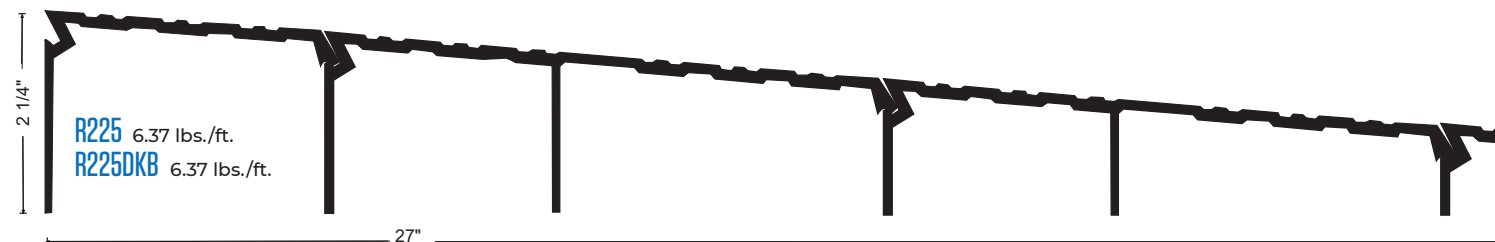

R250 7.34 lbs./ft.
R250DKB 7.34 lbs./ft.

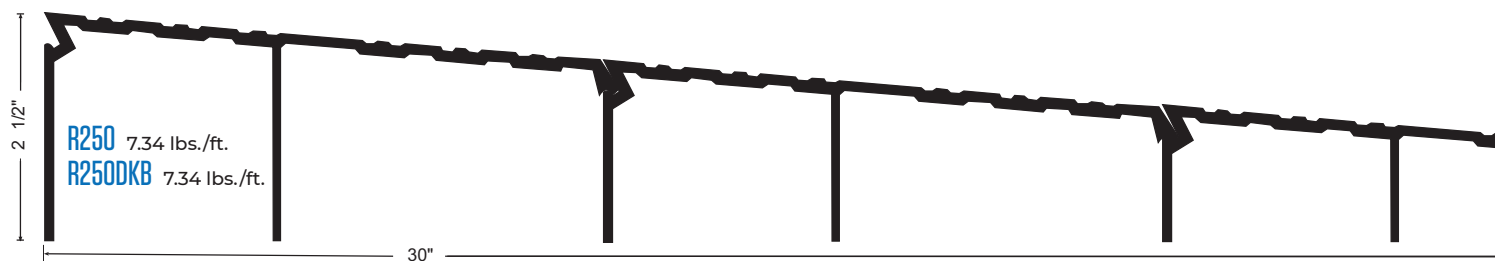

INTERLOCKING RAMPS

ADA COMPLIANT


All Products On This Page



Illustrations Shown at 50%

RETURN CLOSED ENDS FOR RAMPS

Return Closed Ends Provide an Attractive Finished Appearance. They Are Available in Several Lengths and Can Be Field Trimmed to Accommodate Any Size Ramp Assembly.

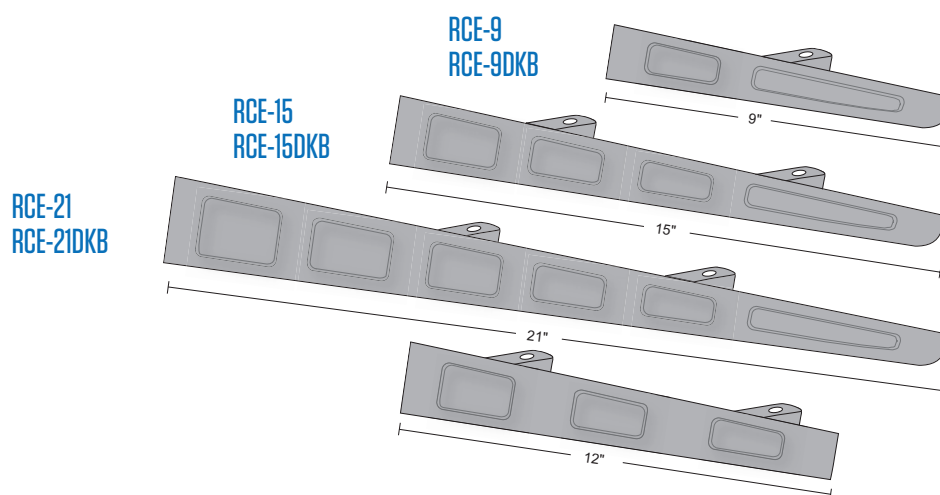

RCE-30 (Includes RCE-21 + 12" Extension)
RCE-30DKB (Includes RCE-21 + 12" Extension)

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

INTERLOCKING OFFSET RAMPS

ADA COMPLIANT

All Products On This Page



Illustrations Shown at 50%
Slope = 1:12



INTERLOCKING OFFSET RAMPS

ADA COMPLIANT




All Products On This Page



RETURN CLOSED ENDS FOR RAMPS

Return Closed Ends Provide an Attractive Finished Appearance. They Are Available in Several Lengths and Can Be Field Trimmed to Accommodate Any Size Ramp Assembly.


Illustrations Shown at 50%
Slope = 1:12

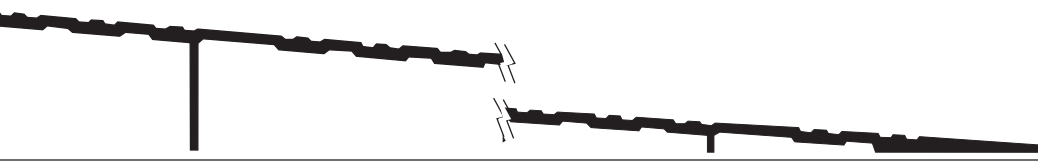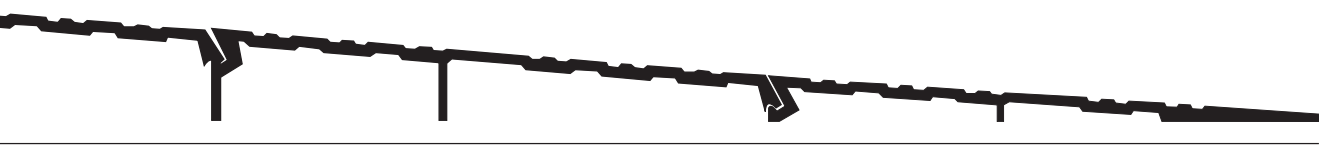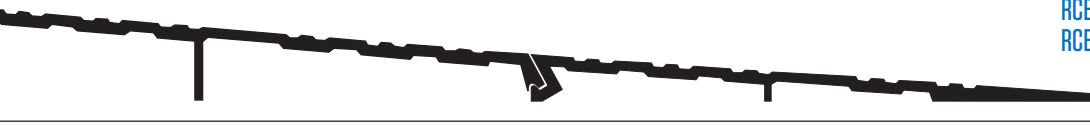

RCE-21
RCE-21DKB

RCE-15
RCE-15DKB

RCE-9
RCE-9DKB

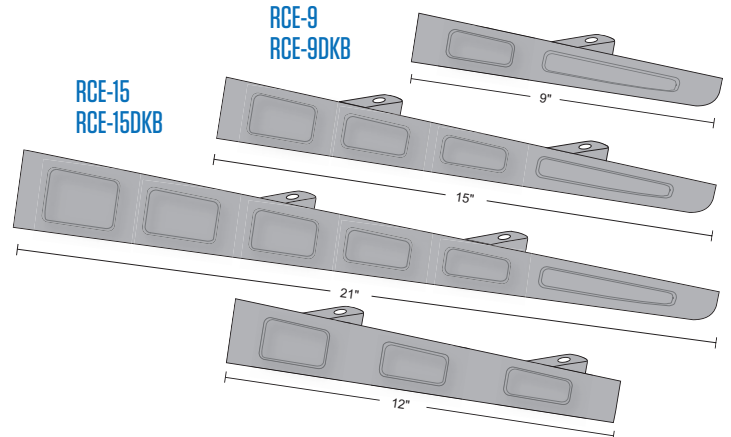

RCE-30 (Includes RCE-21 + 12" Extension)
RCE-30DKB (Includes RCE-21 + 12" Extension)

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

INTERLOCKING RAMP COMPONENTS

All Products On This Page



RAMPS COMPLY WITH

- ▶ ADA Standards for Accessible Design
- ▶ ICC/ANSI A117.1 Accessible and Usable Buildings and Facilities

REQUIREMENTS:

- ▶ Maximum Threshold Height = $\frac{1}{2}$ "
- ▶ Thresholds Above $\frac{1}{4}$ " Must Be Beveled With a Slope No Greater Than 1:2
- ▶ Height Changes Over $\frac{1}{2}$ " Require Use of a Ramp With Slope Not Steeper Than 1:12











Illustrations Shown at 50%



* When Installed as Part of an Interlocking Ramp Assembly.

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized

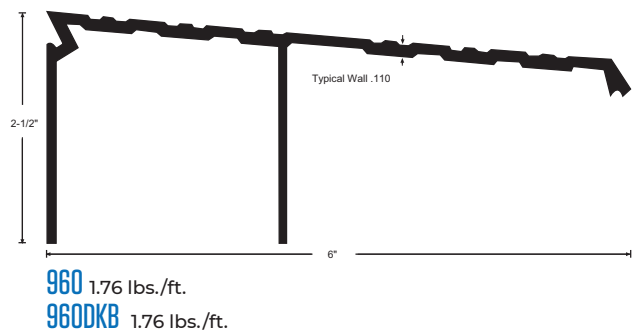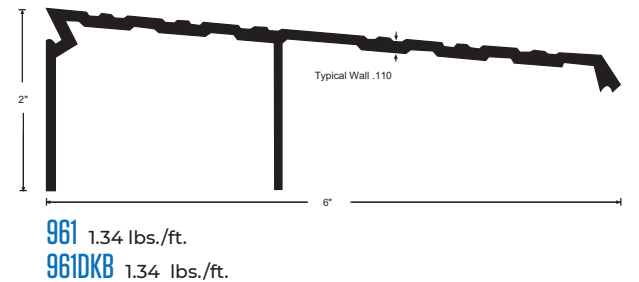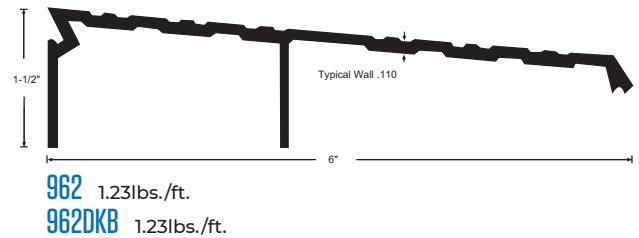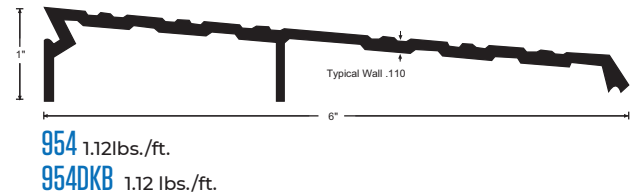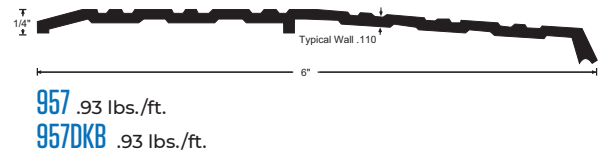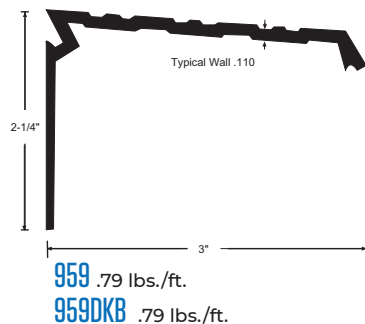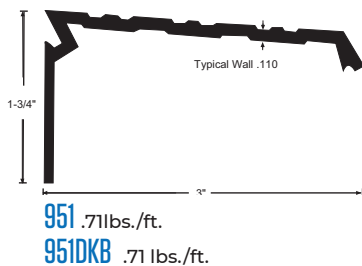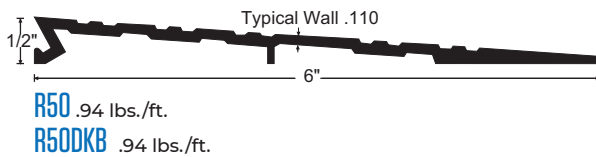

CUSTOM FABRICATED THRESHOLDS

All Products On This Page



*Exception(s): 8168N, 8163, 8164, 8167
Illustrations Shown at 50%


Choose From Various Height and Width Components to Build Custom Thresholds to Meet Special Job Requirements. See the Custom Fabricated Threshold Example Illustrated on Page T5. For Assistance, Contact Our Tech Support Team.

Select the Proper Height Edge Components. Select the Appropriate Center Plates to Construct the Width Needed. Plates May Be Butted Together or Ripped to Make Specific Widths. Support Joints and Wider Spans With Bar Supports.

Threshold Assembly Plates May Be Used Fluted or Smooth Side Up. SIA Slip-Resistant Finish Can Be Applied to All Parts.

Threshold Assembly Components May Be Ordered Separately for Field Assembly or Welded into One-Piece Units in Our Custom Fabrication Shop. They Are Supplied Undrilled Unless a Template Is Provided. Ripping and Beveling Options Are Available. All Custom Fabricated Assemblies Have a Tolerance of $\pm \frac{1}{16}$ ".

If a Welded Assembly Is Desired, Specify "Welded".

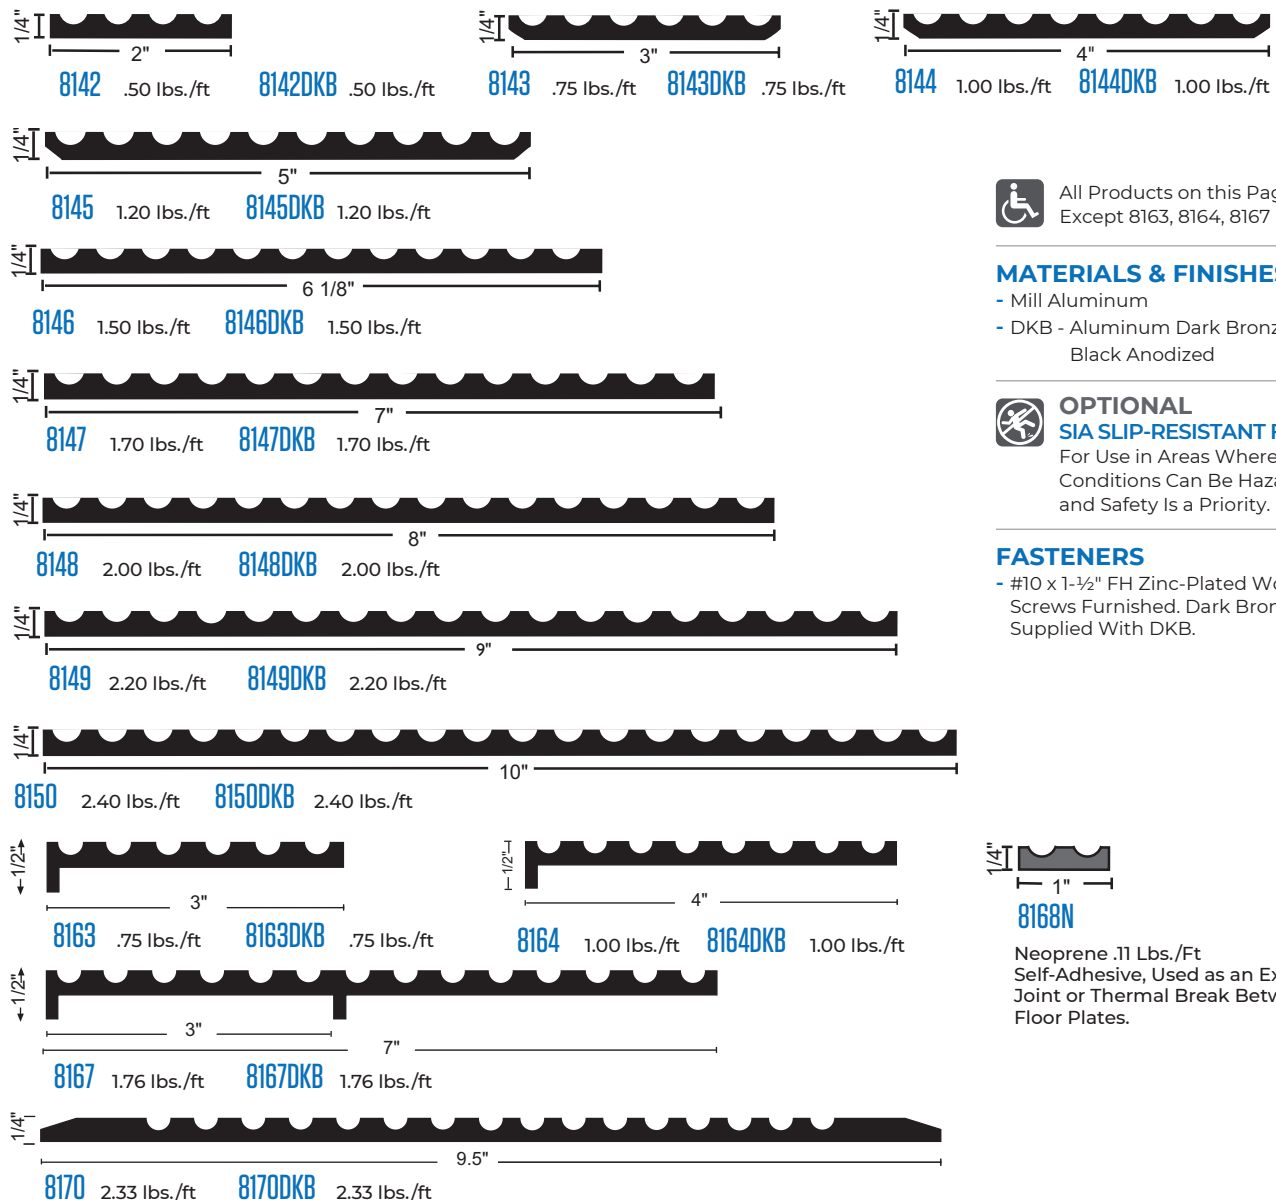

All Products on this Page
Except 8163, 8164, 8167

MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be Hazardous
and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.



8168N


Neoprene .11 Lbs./Ft
Self-Adhesive, Used as an Expansion
Joint or Thermal Break Between
Floor Plates.

EDGE COMPONENTS

All Products On This Page



*Exception(s): 8134

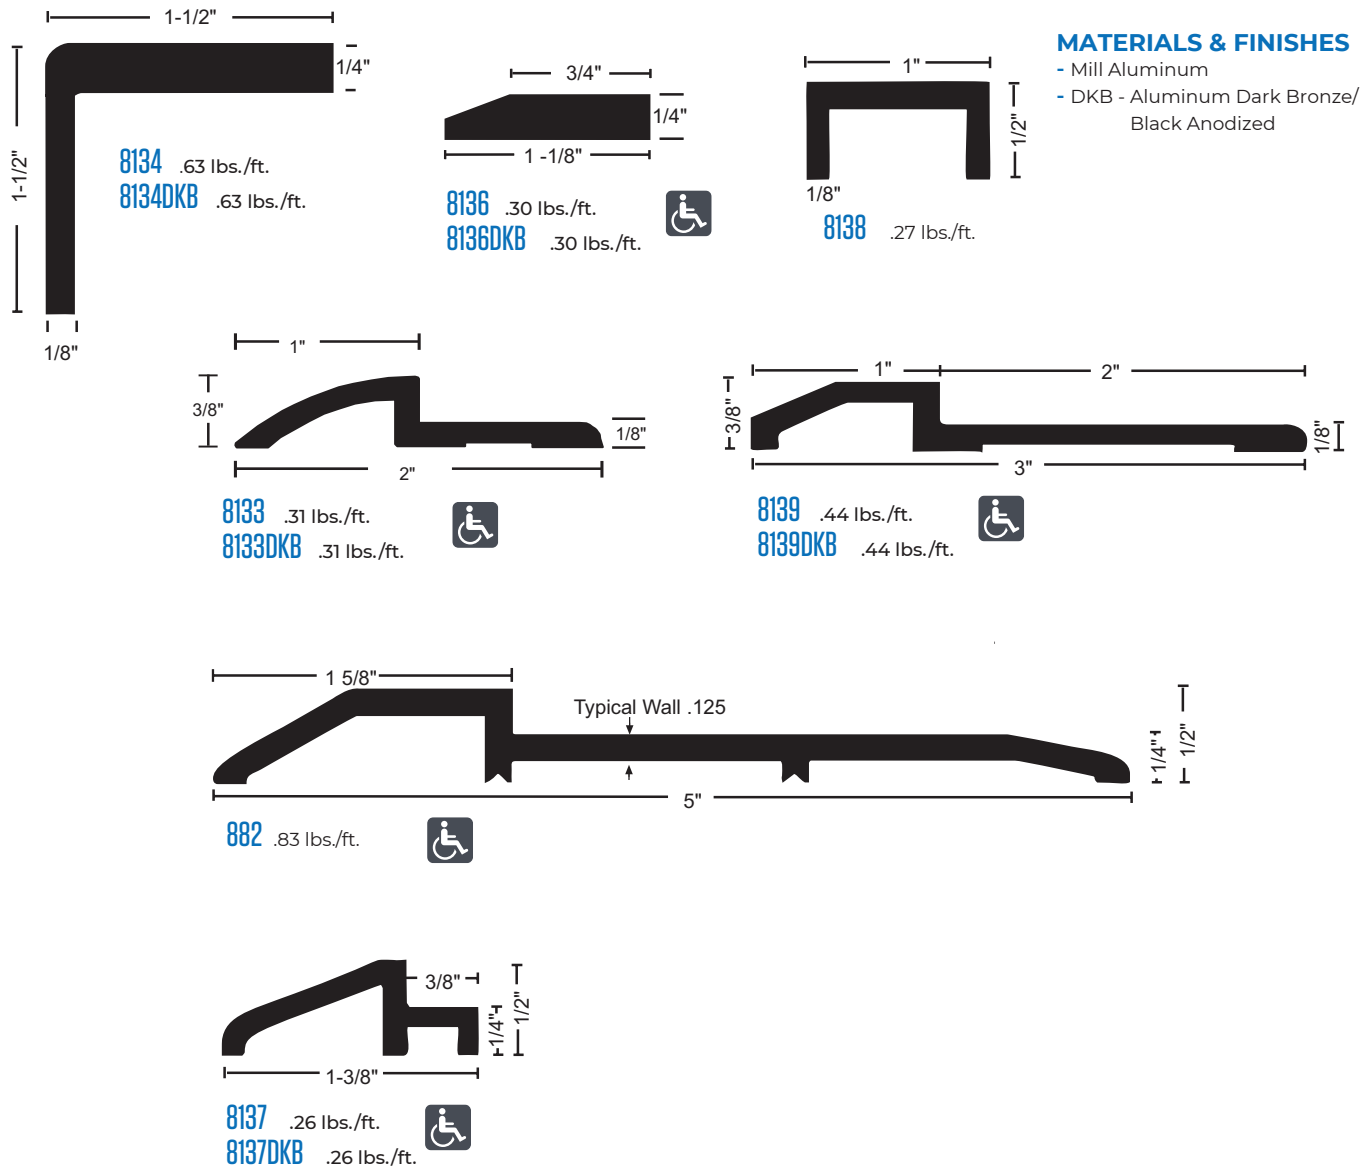

BAR SUPPORTS

Used as Support Under Threshold Assemblies



ALUMINUM COVER PLATES

All Products On This Page



- Great for Expansion Joint Covers or Anywhere Extra Width and Strength Are Required
- Cover Plates Are Made to Order, Non-Returnable / Non-Cancelable Once Fabricated
- Manufactured Through a Rolled Process Providing Extra Durability
- PVC Coating Applied to Protect the Finish During Shipping and Installation
- Minimum Width 2" on 818, 3" on 814 and 4" on 838
- Edges Are Beveled Unless Otherwise Specified
- Furnished Undrilled Although Custom Drilling Is Available to Your Detail
- #10 X 1½" Zinc-Plated Wood Screws Furnished


MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Matte Black Powder Coated



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

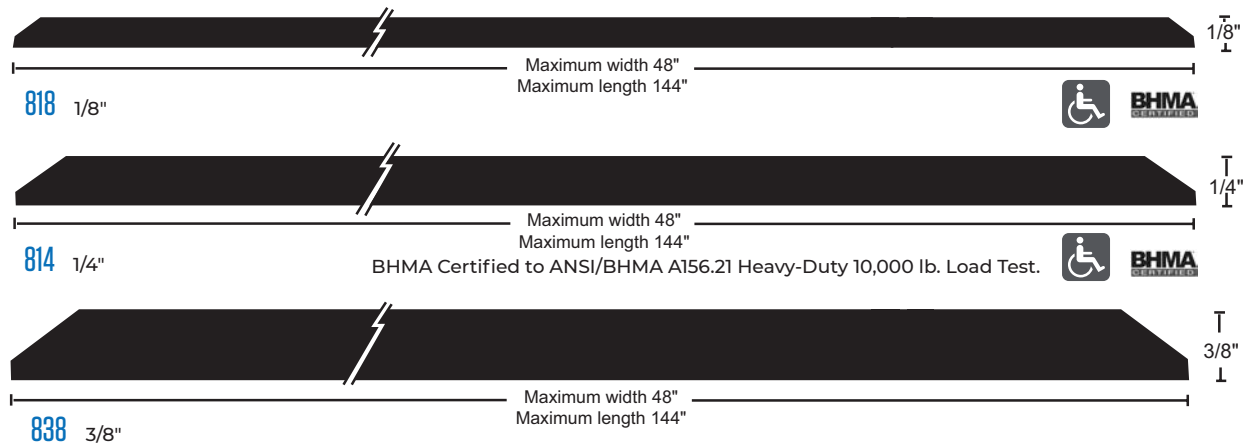

STAINLESS STEEL COVER PLATES

- PVC Coating Applied to Protect the Finish During Shipping and Installation
- Square Cut Edges Standard. Specify if Beveled Edge Is Required
- Furnished Undrilled Although Custom Drilling Is Available to Your Detail
- Minimum Width 3" on 818SS and 4" on 814SS
- #10 X 1½" Stainless Steel Wood Screws Furnished

MATERIALS & FINISHES

#304 Stainless Steel, Mill Finish



Optional Finishes

- POL - Polished US32, 629
- BRUSHED - Brushed US32D, 630



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

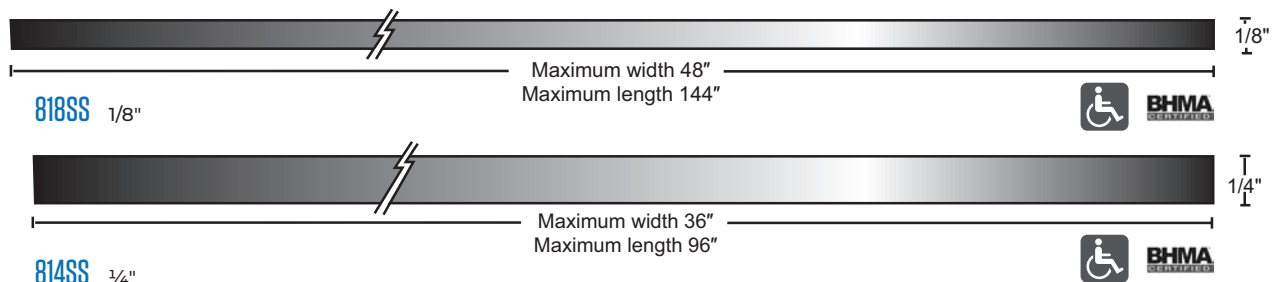

Beveled Edges
(Available at Extra Charge)

FLOOR CLOSER THRESHOLDS

Thresholds Can Be Fabricated for Use With Any Floor Closer. They Are Available in Aluminum, Bronze, or Stainless Steel in Several Finishes Including SIA Slip-Resistant Finish.

Specify When Ordering

- ▶ Type x Number (i.e., Type 3 X 427E)
- ▶ Material and Finish
- ▶ Door Opening Width
- ▶ Door Thickness if Other Than 1 3/4"
- ▶ Handing (Door Handing)
- ▶ Closer Manufacturer
- ▶ Closer Model Number

TYPE 1, 3 & 4 ALUMINUM

1/2" x 7"	427E
1/2" x 8"	428E
3/4" x 7"	713
3/4" x 8"	813
1/2" x 9"	429E
1/2" x 10"	430E
3/4" x 9"	913
3/4" x 10"	1013

TYPE 5 ALUMINUM

1/2" x 7" x 4"	427E x 424E
3/4" x 7" x 4"	713 x 413
1/2" x 8" x 5"	428E x 425E
3/4" x 8" x 5"	813 x 513

ARCHITECTURAL BRONZE

1/2" x 7"	427BR
1/2" x 8"	428BR
3/4" x 7"	713BR
3/4" x 8"	813BR

ARCHITECTURAL BRONZE

1/2" x 7" x 4"	427BR x 424BR
1/2" x 8" x 5"	428BR x 425BR
3/4" x 8" x 5"	813BR x 513BR

Other Thresholds and Custom Assemblies May Be Prepped for Floor Closers. Consult Factory for Custom Applications.

Special Finishes Available



- ▶ Polished, Suffix "POL"
- ▶ Dark Oxidized Bronze US10B, Suffix "DKB"
- ▶ SIA Slip-Resistant Finish, Suffix "SIA"





MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized

OFFSET HUNG

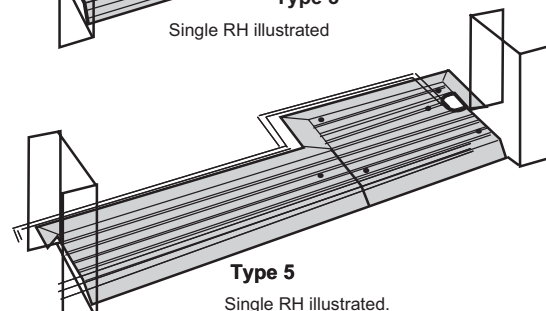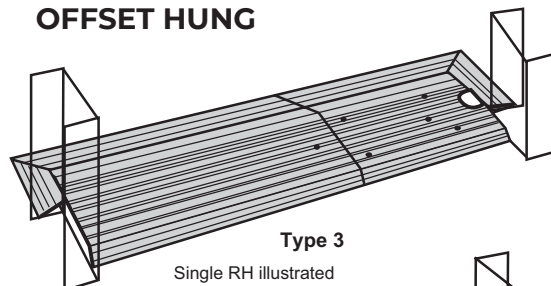

CENTER HUNG

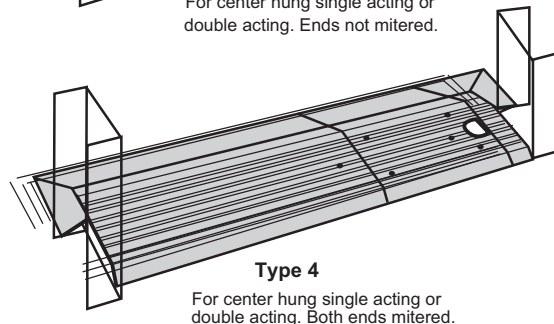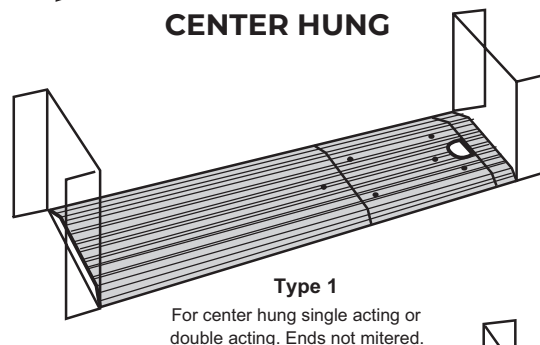

Stainless Steel Available

- ▶ Specify Type (1, 3 or 4) x Stainless Steel Threshold Model Number

MATERIALS & FINISHES

#304 Stainless Steel, Mill Finish

Optional Finishes

- POL - Polished US32, 629
- BRUSHED - Brushed US32D, 630

FLOOR CLOSER THRESHOLDS

All Products On This Page



MATERIALS & FINISHES

- Mill Aluminum
- DKB - Aluminum Dark Bronze/Black Anodized




OPTIONAL

SIA SLIP-RESISTANT FINISH


For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS


- #10 x 1-1/2" FH Zinc-Plated Wood Screws Furnished. Dark Bronze Supplied With DKB.

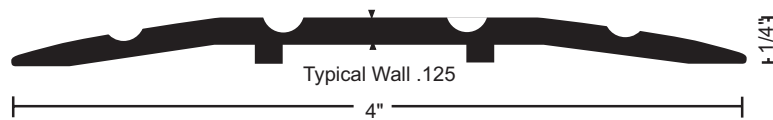


413 .53 lbs./ft.
413DKB .53 lbs./ft.




513 .68 lbs./ft.
513DKB .68 lbs./ft.




713 1.01 lbs./ft.
713DKB 1.01 lbs./ft.




813 1.20 lbs./ft.
813DKB 1.20 lbs./ft.

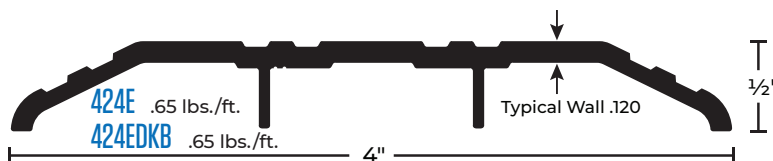


424E .65 lbs./ft.
424EDKB .65 lbs./ft.

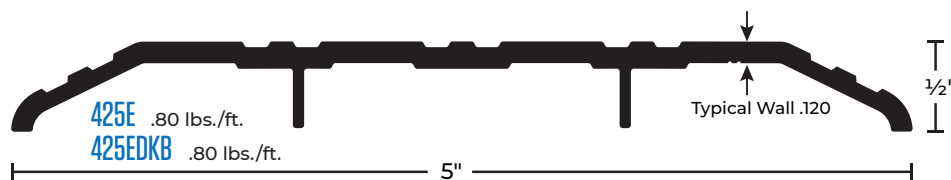

425E .80 lbs./ft.
425EDKB .80 lbs./ft.

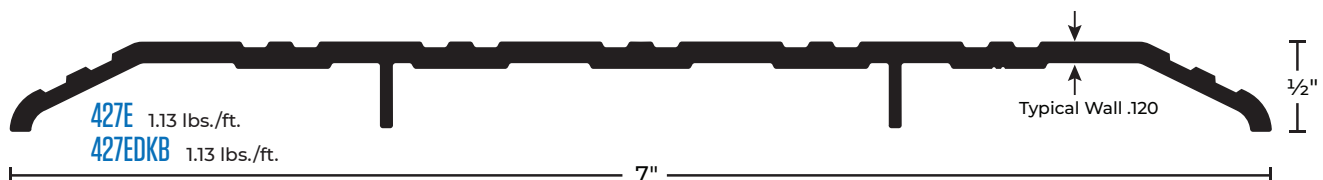

427E 1.13 lbs./ft.
427EDKB 1.13 lbs./ft.

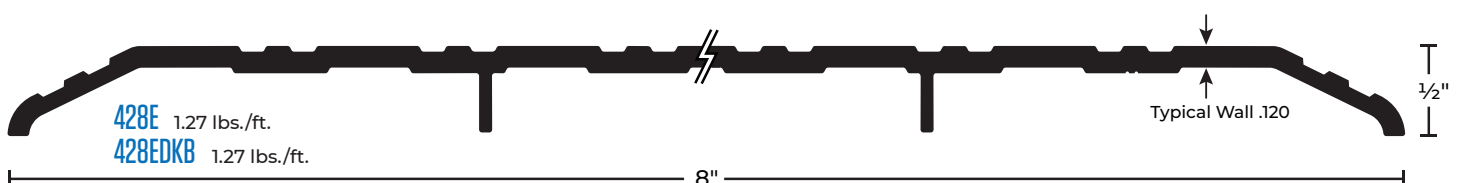

428E 1.27 lbs./ft.
428EDKB 1.27 lbs./ft.

STAINLESS STEEL

1/4" SADDLE THRESHOLDS

All Products On This Page



- Widths and Heights Other Than Shown Are Available Upon Request
- Return Closed Ends Are Available - See Page T5
- Stainless Steel Thresholds Are Type #304, Mill Finish

MATERIALS & FINISHES

#304 Stainless Steel, Mill Finish

Optional Finishes

- POL - Polished US32, 629
- BRUSHED - Brushed US32D, 630







OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 x 1-1/2" FH Stainless Steel Wood Screws

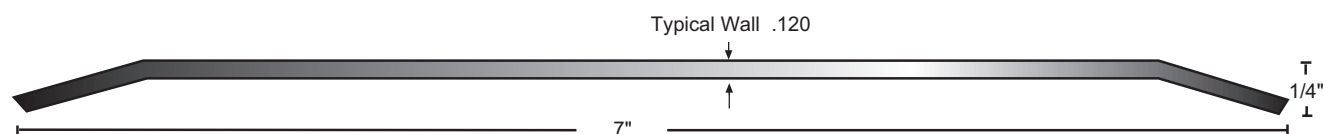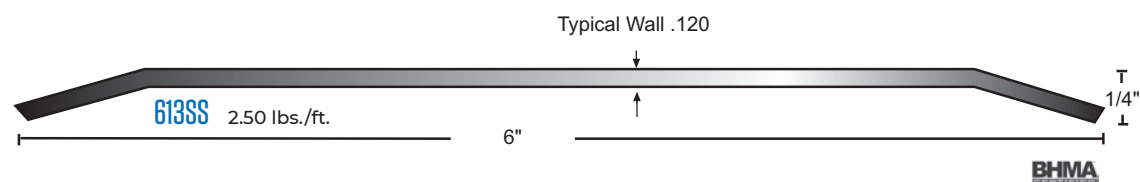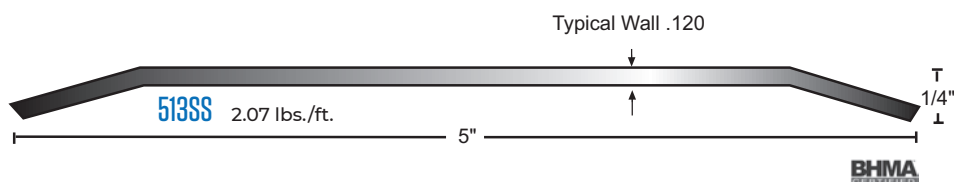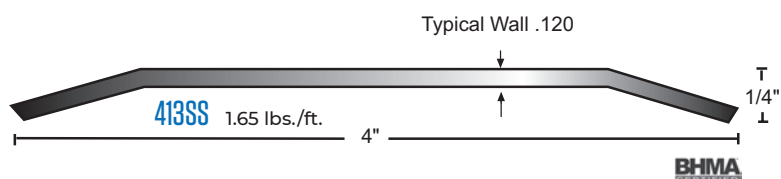

713SS	2.95 lbs./ft.	7"
813SS	3.38 lbs./ft.	8"
913SS	3.81 lbs./ft.	9"
1013SS	4.25 lbs./ft.	10"

STAINLESS STEEL

1/2" SADDLE THRESHOLDS

All Products On This Page







- Widths and Heights Other Than Shown Are Available Upon Request
- Return Closed Ends Are Available - See Page T5
- Stainless Steel Thresholds Are Type #304, Mill Finish



412SS

Stainless Steel
Saddle Threshold,
1/2" x 4"

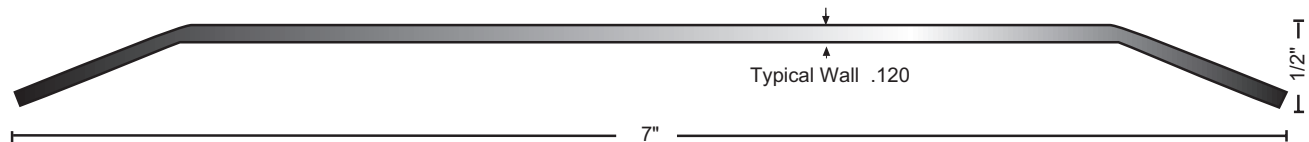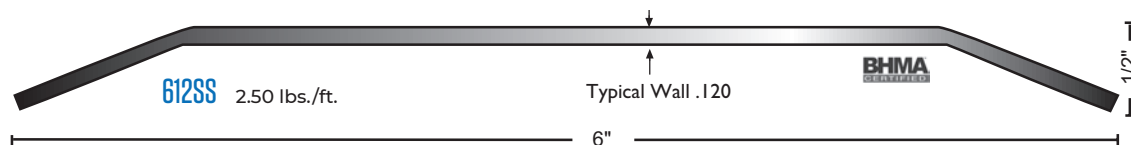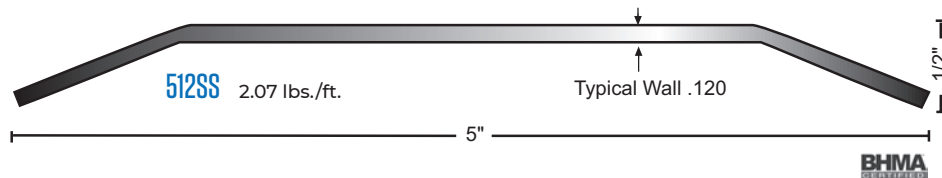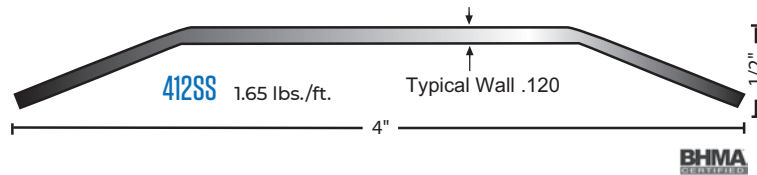

712SS	2.95 lbs./ft.	7"
812SS	3.38 lbs./ft.	8"
912SS	3.81 lbs./ft.	9"
1012SS	4.25 lbs./ft.	10"

MATERIALS & FINISHES

#304 Stainless Steel, Mill Finish

Optional Finishes

- POL - Polished US32, 629
- BRUSHED - Brushed US32D, 630



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be Hazardous
and Safety Is a Priority.


FASTENERS

- #10 x 1-1/2" FH Stainless Steel
Wood Screws

STAINLESS STEEL

BUMPER SEAL THRESHOLDS

All Products On This Page

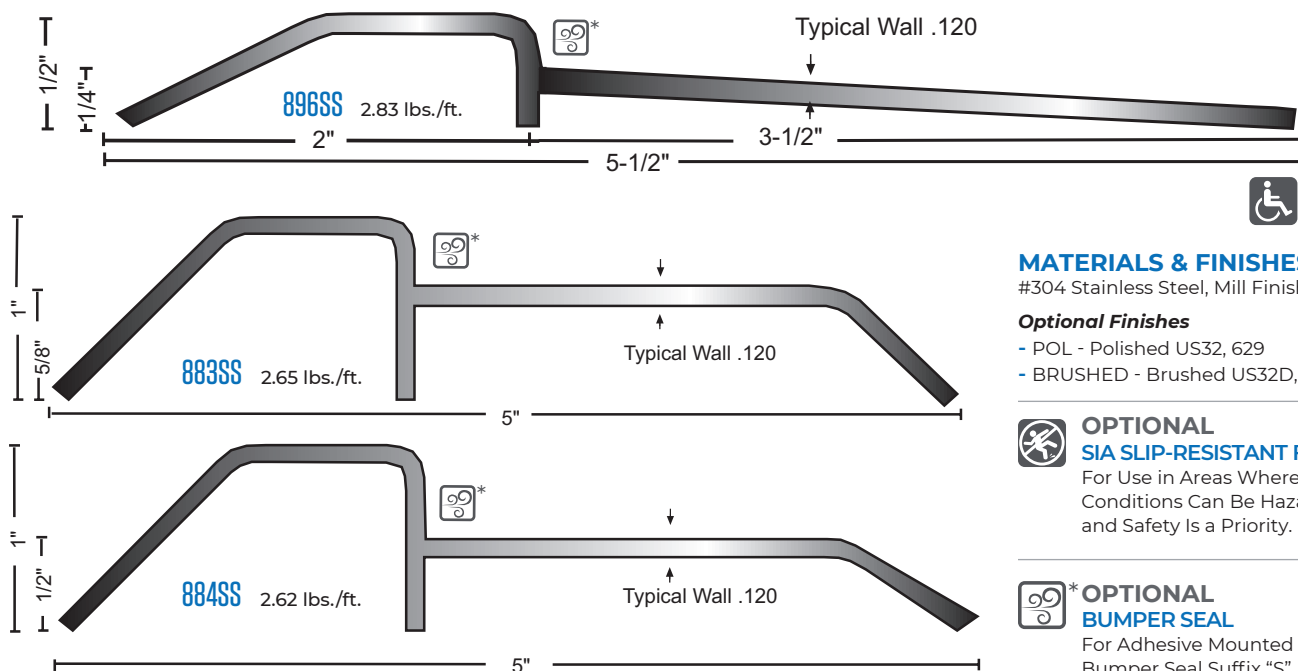

MATERIALS & FINISHES

#304 Stainless Steel, Mill Finish

Optional Finishes

- POL - Polished US32, 629
- BRUSHED - Brushed US32D, 630



OPTIONAL

SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.



*OPTIONAL

BUMPER SEAL

For Adhesive Mounted Silicone Bumper Seal Suffix "S"



STAINLESS STEEL

COVER PLATES

- ▶ PVC Coating Applied to Protect the Finish During Shipping and Installation
- ▶ Square Cut Edges Standard. Specify if Beveled Edge Is Required
- ▶ Furnished Undrilled Although Custom Drilling is Available to Your Detail
- ▶ Minimum Width 3" on 818SS and 4" on 814SS.
- ▶ #10 X 1 1/2" Stainless Steel Wood Screws Furnished

MATERIALS & FINISHES

#304 Stainless Steel, Mill Finish

Optional Finishes

- POL - Polished US32, 629
- BRUSHED - Brushed US32D, 630




OPTIONAL

SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.


Beveled Edges
(Available at Extra Charge)

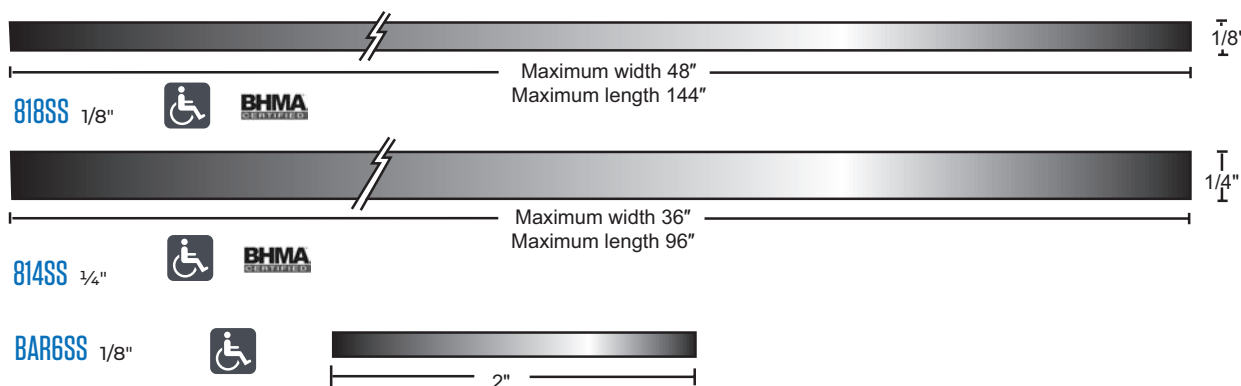


ARCHITECTURAL BRONZE

1/4" SADDLE THRESHOLDS


All Products On This Page




513BR 1.96 lbs./ft.

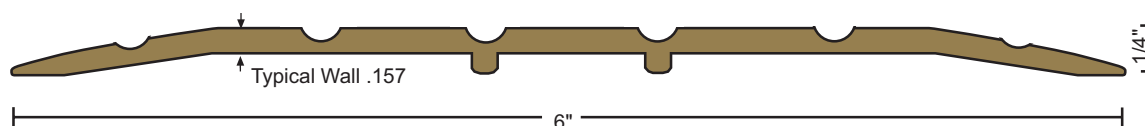

613BR 3.06 lbs./ft.

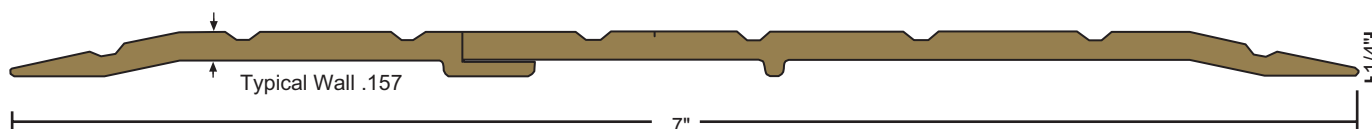

713BR 3.62 lbs./ft.



813BR 4.60 lbs./ft.

MATERIALS & FINISHES

Architectural Bronze Satin Finish (728) Similar to US4

Optional Finishes

- POL - Polished (721)
- DKB - Dark Oxidized Oil Rubbed (722) Similar to US10B



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.


FASTENERS

- #10 X 1-1/2" Solid Brass Wood Screws Furnished. Antique Bronze Finish Screws Provided With Dark Bronze Thresholds.


ARCHITECTURAL BRONZE

1/2" SADDLE THRESHOLDS


All Products On This Page

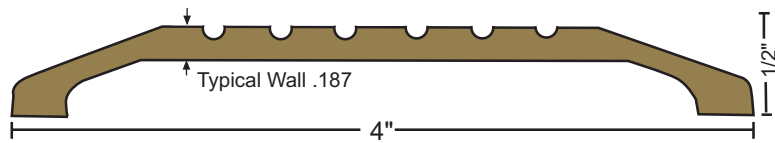


424BR 2.28 lbs./ft.

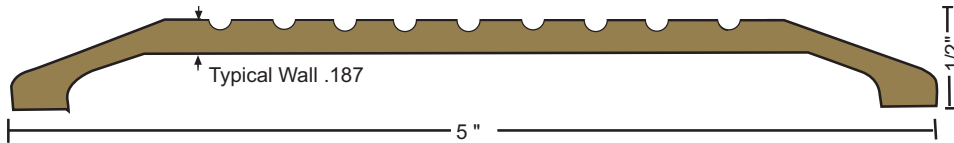


425BR 2.84 lbs./ft.

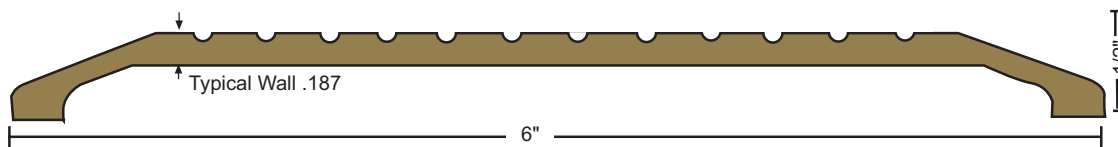


426BR 3.33 lbs./ft.

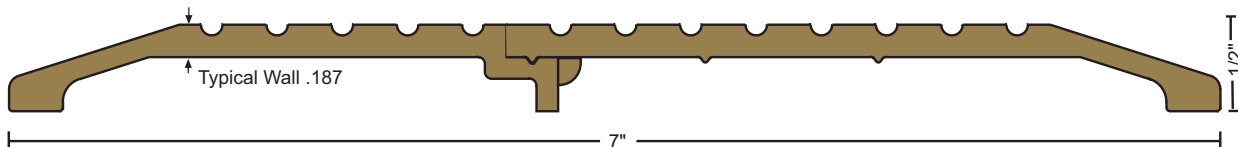


427BR 4.09 lbs./ft.

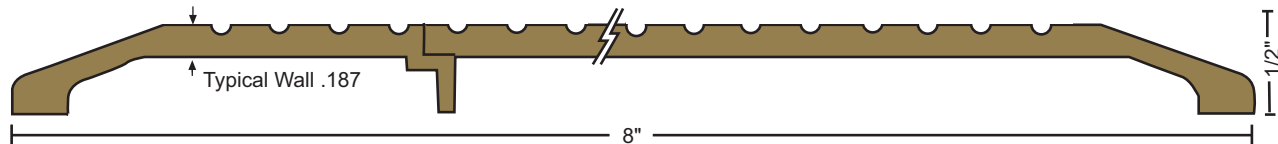

428BR 5.06 lbs./ft.

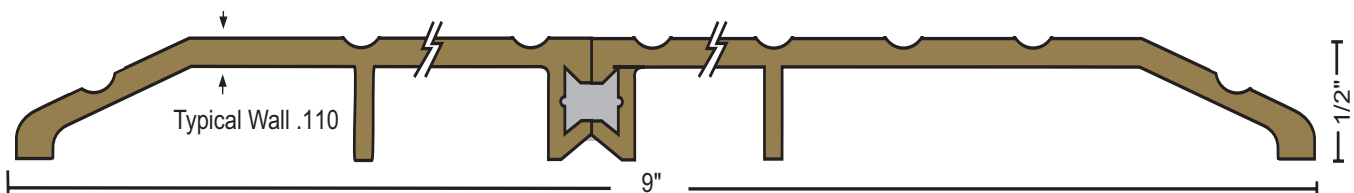

429BR 4.27 lbs./ft.

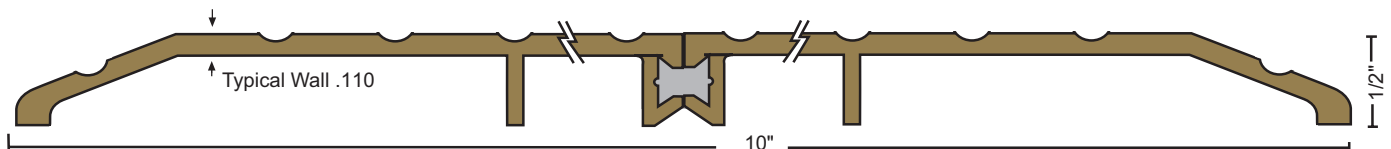

430BR 4.78 lbs./ft.

MATERIALS & FINISHES

Architectural Bronze Satin Finish (728) Similar to US4

Optional Finishes

- POL - Polished (721)
- DKB - Dark Oxidized Oil Rubbed (722) Similar to US10B



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 X 1-1/2" Solid Brass Wood Screws Furnished. Antique Bronze Finish Screws Provided With Dark Bronze Thresholds.


ARCHITECTURAL BRONZE

THERMAL BREAK SADDLE THRESHOLDS


All Products On This Page




Thermal Break Thresholds Feature a Rigid Thermoplastic Spline, Creating a Separation to Prevent the Transfer of Outside Temperature and Frost Through the Threshold.

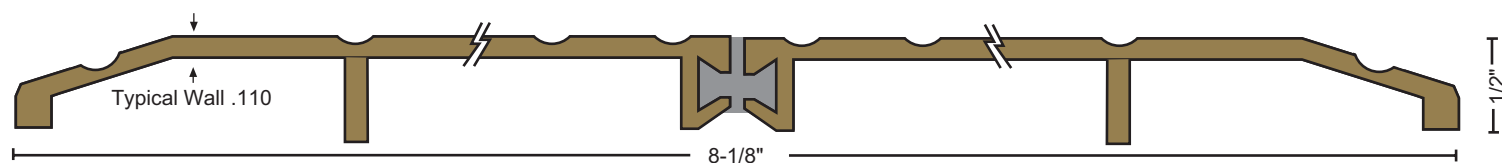

8428BR 3.62 lbs./ft.

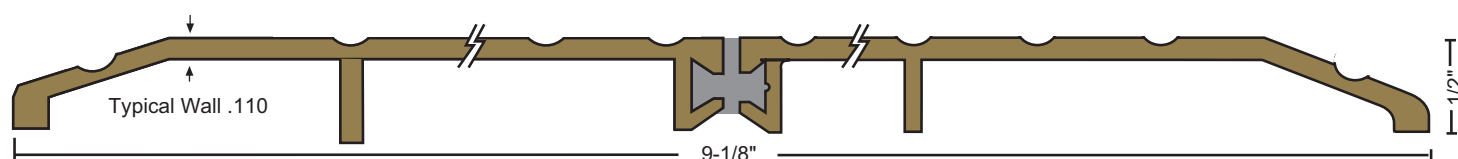

8429BR 4.16 lbs./ft.

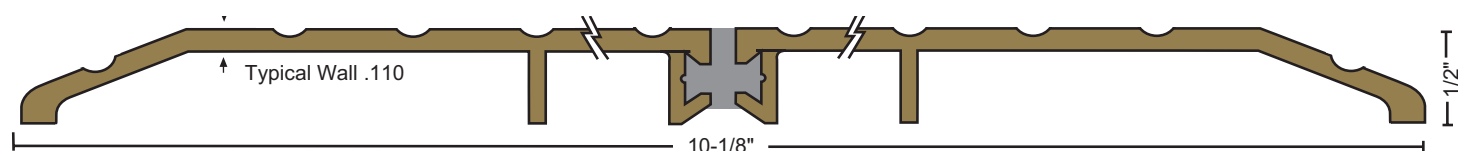

8430BR 4.70 lbs./ft.

MATERIALS & FINISHES

Architectural Bronze Satin Finish (728) Similar to US4

Optional Finishes

- POL - Polished (721)
- DKB - Dark Oxidized Oil Rubbed (722) Similar to US10B



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.






FASTENERS

- #10 X 1-1/2" Solid Brass Wood Screws Furnished. Antique Bronze Finish Screws Provided With Dark Bronze Thresholds.

ARCHITECTURAL BRONZE

HALF SADDLE THRESHOLDS

All Products On This Page

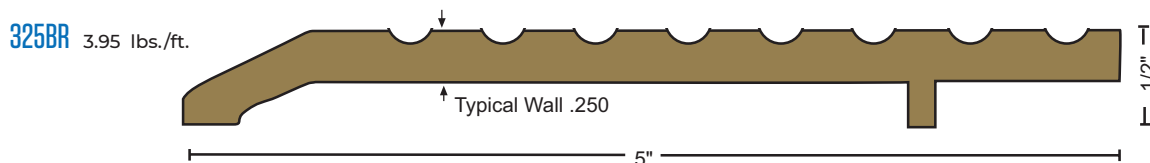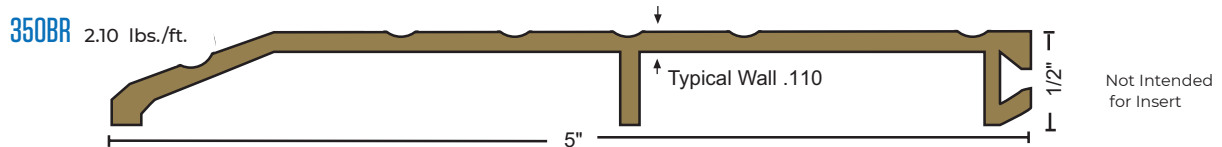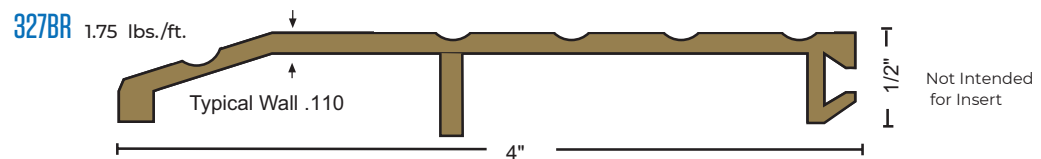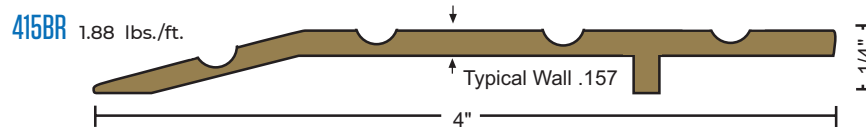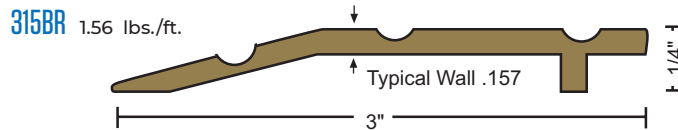

MATERIALS & FINISHES

Architectural Bronze Satin Finish (728) Similar to US4

Optional Finishes

- POL - Polished (721)
- DKB - Dark Oxidized Oil Rubbed (722) Similar to US10B



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 X 1 1/2" Solid Brass Wood Screws Furnished. Antique Bronze Finish Screws Provided With Dark Bronze Thresholds.




* When Installed With the Non-Beveled Edge Flush With Flooring, or Where No Greater Than 1/4" Vertical Rise Occurs


ARCHITECTURAL BRONZE

INTERLOCKING THRESHOLDS

All Products On This Page

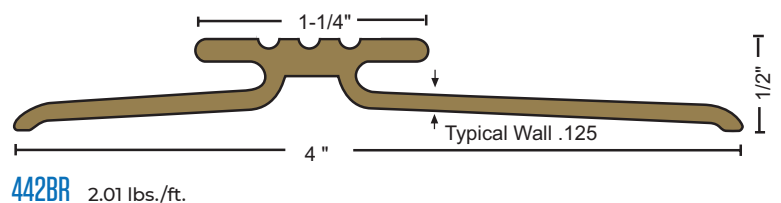


442BR 2.01 lbs./ft.

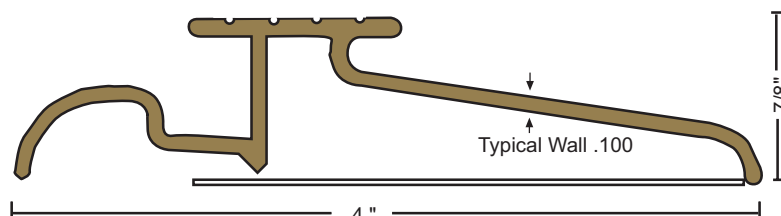

484BR 1.83 lbs./ft.

Weep Holes Furnished Standard.
Bronze Pan Optional - Please Specify



BRONZE HOOK

Supplied Standard With Bronze Interlocking
Thresholds: Furnished With #18 X 7/8" Nails
Available in 36" & 48" Lengths

MATERIALS & FINISHES

Architectural Bronze Satin Finish
(728) Similar to US4

Optional Finishes

- POL - Polished (721)
- DKB - Dark Oxidized Oil Rubbed
(722) Similar to US10B



OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where
Conditions Can Be
Hazardous and Safety Is
a Priority.

FASTENERS

- #10 X 1 1/2" Solid Brass Wood
Screws Furnished. Antique
Bronze Finish Screws Provided
With Dark Bronze Thresholds.

ARCHITECTURAL BRONZE

CUSTOM FABRICATED THRESHOLDS

All Products On This Page








Choose From Various Height and Width Components to Build Custom Thresholds to Meet Special Job Requirements. See the Custom Fabricated Threshold Example Illustrated on Page T5. For Assistance, Contact Our Tech Support Team.

Select the Proper Height Edge Components. Select the Appropriate Center Plates to Construct the Width Needed. Plates May Be Butted Together or Ripped to Make Specific Widths. Support Joints and Wider Spans With Bar Supports.

Threshold Assembly Plates May Be Used Fluted or Smooth Side Up. SIA Slip-Resistant Finish Can Be Applied to All Parts.

Threshold Assembly Components May Be Ordered Separately for Field Assembly or Welded into One-Piece Units in Our Custom Fabrication Shop. They Are Supplied Undrilled Unless a Template Is Provided. Ripping and Beveling Options Are Available. All Custom Fabricated Assemblies Have a Tolerance of $\pm 1/16$ ".

If a Welded Assembly Is Desired, Specify "Welded".

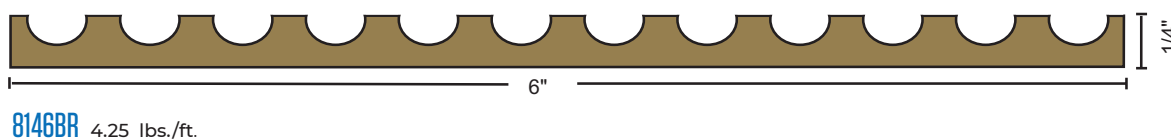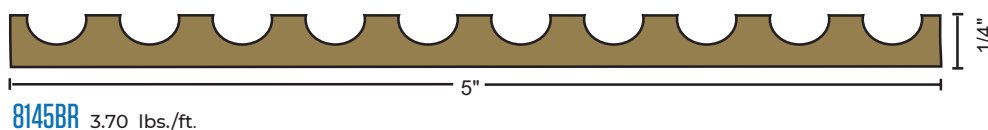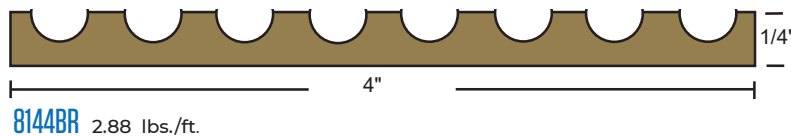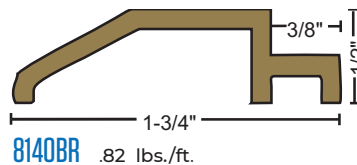

MATERIALS & FINISHES

Architectural Bronze Satin Finish (728) Similar to US4

Optional Finishes

- POL - Polished (721)
- DKB - Dark Oxidized Oil Rubbed (722) Similar to US10B




OPTIONAL SIA SLIP-RESISTANT FINISH

For Use in Areas Where Conditions Can Be Hazardous and Safety Is a Priority.

FASTENERS

- #10 X 1-1/2" Solid Brass Wood Screws Furnished. Antique Bronze Finish Screws Provided With Dark Bronze Thresholds.

THRESHOLD FASTENERS



#10 x 1-1/2" Phillips Flat Head Wood Screw
Use 1/8" Drill Bit



Phillips Head
Top View




Spanner Head
Top View



Torx Security
Top View




#12 x 1-1/2" Phillips Flat Head Wood Screw
Use 9/64" Drill Bit
Also #12 x 1"



#1/4-20 x 1-1/2" Phillips Flat Head
Machine Screw



#1/4-20 Expansion Anchor
Carbon Steel
Use 3/8" Drill Bit




#10 x 1-1/2" Phillips Flat Head Stainless Steel
Sheet Metal Screw
Use 1/8" Drill Bit
Also #10 x 1", #10 x 2", #10 x 2-1/2", #10 x 3"




#10-24 x 1-1/2" Phillips Flat Head
Machine Screw
Also #10-24 x 3/4", #10-24 x 1"




#10-24 Lead Anchor
Use 3/8" Drill Bit and
Powers Seating Tool



#12 x 1-1/2" Phillips Flat Head
Sheet Metal Screw
Use 9/64" Drill Bit
Also: #12 x 1"




Plastic Anchor Various Sizes
Use Drill Size = Anchor Size




Lead Expansion Shield
4% Antimonial Lead
Use 5/16" Drill Bit




#6 x 3/4" Phillips Flat Head Self-Tapping
Machine Screw
Use 3/32" Drill Bit



#1/4-20 Phillips Combo Flat Head Machine
Screw/Anchor
Use 1/4" Drill Bit



#18 X 7/8" Nail for Use With 80B
Hook Strip



Hilti Kwik-Con II 1/4" x 1-3/4" Screw,
Available With Phillips Head or Torx Head.
Use Hilti TKC Large Concrete Bit SDS 1/4"
Tough Carbide

NOTES

NOTES



For the most up-to-date
Seals: Thresholds Catalog,
scan the QR code
or visit ngp.com.



ngp.com
1-800-NGP-RUSH

FAX: (800) 255-7874
QUOTES: quotes@ngp.com
ORDERS: orders@ngp.com

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118

CARSON CITY
3689 Arrowhead Drive
Carson City, NV 89706