


Product Description

# Aero-Acoustic Levitator

For investigation and processing of solids and liquids  
at very high temperatures,  $>3000^{\circ}\text{C}$ .

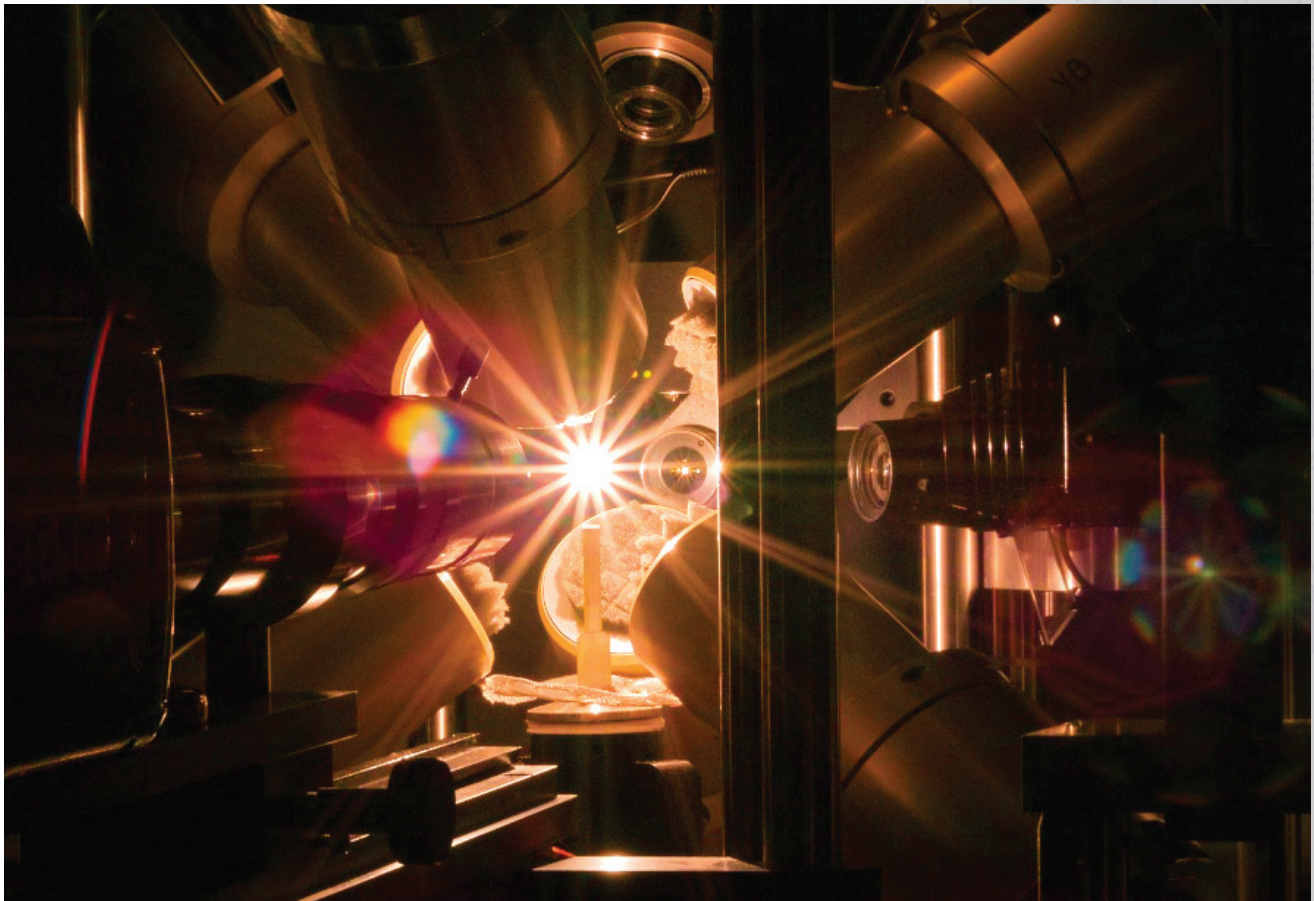

PHYSICAL PROPERTY MEASUREMENTS, INC.  
825 CHICAGO AVENUE, SUITE E  
EVANSTON, ILLINOIS USA 60202  
TELEPHONE: 847 864 8509 FAX: 847 864 9114  
EMAIL: PNORDINE@PPMEASUREMENTS.COM  
WWW.PPMEASUREMENTS.COM



# Aero-Acoustic Levitator - Background and Applications

Liquids at very high temperatures occur in critical environments: aluminum fueled rocket exhaust, nuclear reactor accidents, volcanic eruptions, and in basic scientific investigations into the properties of materials. Temperatures in excess of 3000° Celsius can be of interest where no suitable containers are available. In fact, the discovery of inert containers for work at even lower temperatures is often the principal and most difficult problem to solve in experimental high temperature science. The Aero-Acoustic Levitator<sup>1,2</sup> (AAL) provides containerless conditions for high temperature research. It enables well-controlled, contamination-free investigation of liquid and solid materials at extreme temperatures.

Containerless conditions achieved with the AAL allow study of deeply undercooled melts<sup>3-9</sup> at temperatures far below the melting point. Novel glasses<sup>10-13</sup> can be formed from melts that would otherwise crystallize upon cooling. Phase transitions under extreme conditions that may otherwise be missed are found by direct visual observation<sup>14-17</sup>. Well-controlled investigations of oxidation/reduction reactions<sup>18-20</sup> and phase diagrams<sup>20</sup> are possible. There are further possibilities for novel advances, such as surface tension and viscosity measurements by drop oscillation experiments<sup>21-23</sup>, liquidus and melting point measurements that would otherwise be influenced by contaminants, optical property and emissivity measurements<sup>20,24-29</sup> on liquids, synthesis of ultra-pure<sup>30</sup> and potentially single crystalline materials. Together, such investigations will advance scientific understanding of the liquid state of matter and gain a deeper understanding of material properties under technologically-important conditions.

In AAL, levitation is by the aerodynamic force of an upward flowing gas jet stabilized by acoustic forces subject to feedback control from an optical position-sensing system. In combination with laser beam heating, stable and well-controlled levitation of solid and molten materials is obtained at temperatures limited only by material volatility. Extensive applications to oxide materials have been made<sup>31</sup>. The AAL can be installed in a glove box for application to air sensitive materials.



# Aero-Acoustic Levitator - Features and Specifications

Features of the basic system are given below. AAL systems are built to order following discussion of special needs for the applications of interest.

- Laser beam heating and melting of levitated samples with fast optical pyrometry for temperature measurements.
- Operation with any involatile solid or liquid material sample is stabilized; typically 0.25 to 0.35 cm diameter, and density up to at least 12 g/cc.
- Gas jet levitation in a three-axis acoustic system operated at 22 kHz.
- Electrically-heated aerodynamic levitation nozzle for use with air, oxygen, inert- or active-process gases. The gas is heated to stabilize laminar flow.
- Position sensing and sample velocity feedback controls acoustic standing waves to enhance sample stability.
- Acoustic forces control shape, spin, and can induce resonant oscillation of liquid drops.
- Video imaging provides well-resolved viewing of the levitated material under extreme radiance conditions.
- A fast video camera records sample rotation, oscillation, shape, crystallization events, etc. at kHz rates.
- The standard system has components integrated in a stand-alone frame. It can be configured for glove box operation.

## Instrument Dimensions

Levitator structure	Base	0.6 x 0.6 m (24" x 24")
	Height	0.9 m (36")
System structure	Base	1.4 x 1.6 m (55" x 62")
	Height	2.0 m (78")
Total weight		500 kg (1100 lb)


## Utility Requirements

Electrical (includes laser power)	6 circuits, 240V, 30A
Cooling water for each of 2 lasers	1000 liter/hour (4 gal/min)
Gases for levitation	up to 10 liter/min (21 ft <sup>3</sup> /hour)

Dimensions and utility requirements are approximate. Other supply voltages and line frequencies are available.






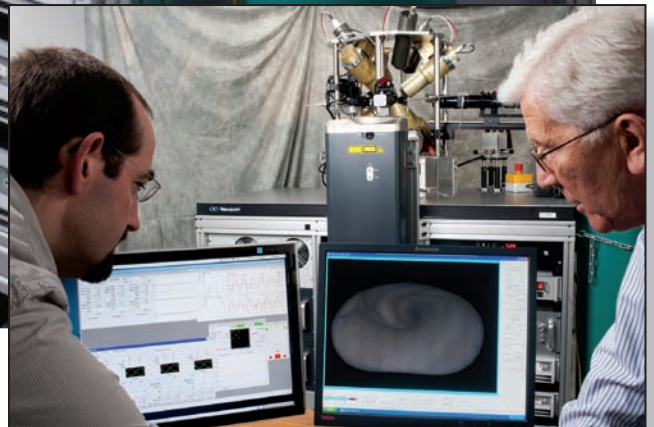


Photograph of the Aero-Acoustic Levitator system showing table-top levitator, CO<sub>2</sub> laser beam heating, rack-mounted electronics, Vision Research fast camera.



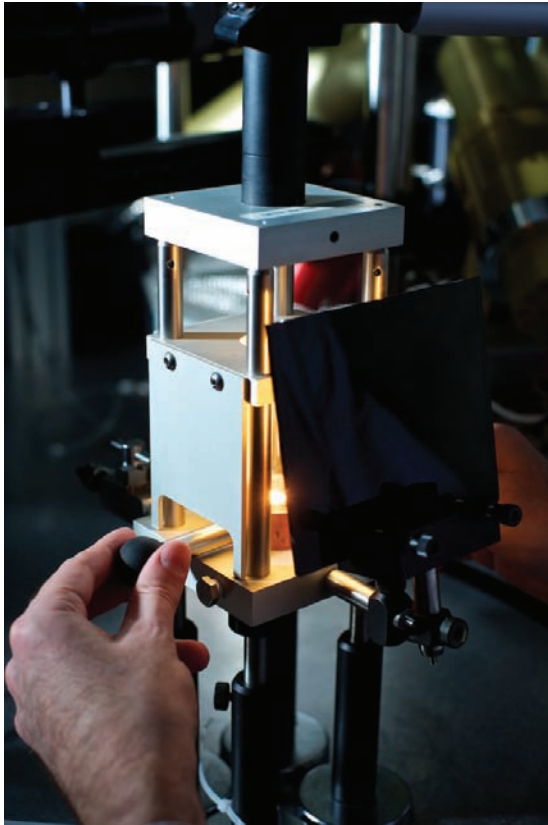

From the left: Dennis Merkley (acoustics, project management), Paul Nordine (PPM President), Jeff Sickel (software) during AAL delivery in Germany. Other team members not pictured here are James Rix (mechanical design) and John DeVos (electronics).

### Laser Hearth melter<sup>32</sup> used for sample preparation

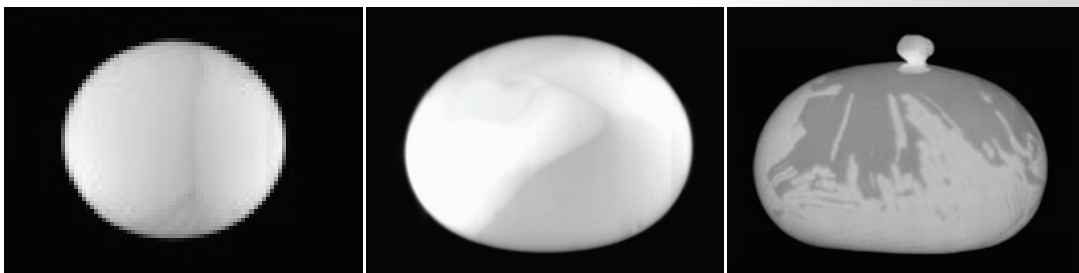

### Photographs of levitated samples

**Left** – liquid  $\text{Al}_2\text{O}_3$ ,  $T_a = 3200^\circ\text{C}$ ; **Center** - liquid  $\text{HfO}_2$ , density  $\approx 9.6 \text{ g/cc}$   $T_a = 2910^\circ\text{C}$ ;

**Right** – Solid  $\text{Y}_2\text{O}_3$  phase transition,  $T_a = 2270^\circ\text{C}$ .

Please contact PPM for discussion of your interest and needs.  
Additional information, including video of AAL experiments is at  
[www.ppmeasurements.com](http://www.ppmeasurements.com)



## References to AAL and Non-Contact Experiments

1. J.K.R. Weber, D.S. Hampton, D.R. Merkley, C.A. Rey, M.M. Zatarski and P.C. Nordine, "Aero-Acoustic Levitation - A method for containerless liquid phase processing at high temperatures," *Rev. Sci. Instrum.*, 65, 456-465 (1994).
2. J.K.R. Weber, J.J. Felten, B. Cho and P.C. Nordine, "Design and Performance of the Aero-Acoustic Levitator," *J. Jpn. Soc. Microgravity Appl.*, 13, 27-35 (1996).
3. J.K.R. Weber, C.D. Anderson, S. Krishnan and P.C. Nordine, "Solidification Behavior of Undercooled Liquid Aluminum Oxide," *J. Am. Ceram. Soc.*, 78, 577-82 (1995).
4. W.M. Kriven, M.H. Jilavi, D. Zhu, J.K.R. Weber, B. Cho, J.J. Felten and P.C. Nordine, "Synthesis and Microstructure of Mullite Fibers Grown from Deeply Undercooled Melts," *Ceramic Microstructures '96*, Eds. A.P. Tomsia and A. Glaesser, *Ceramic Microstructure: Control at the Atomic Level*, Plenum Press, NY, 1998, pp. 169-176.
5. K. Nagashio, Y. Takamura and K. Kuribayashi, "Congruent Growth of  $\text{NdBa}_2\text{Cu}_3\text{O}_{7-8}$  Superconducting Oxide from the Highly Undercooled Melt by Containerless Processing," *Proc. PRICM3*, Eds. M.A. Imam, R. DeNale, S. Hanada, Z. Zhong and D.N. Lee, 565-570 (1998).
6. K. Nagashio, Y. Takamura and K. Kuribayashi, "Coupled Growth in the Peritectic Nd-Ba-Cu-O System from Highly Undercooled Melt," *Scripta Mater.*, 41, 1161-67 (1999).
7. K. Nagashio, Y. Takamura, K. Kuribayashi and Y. Shiohara, "Microstructural Control of  $\text{NdBa}_2\text{Cu}_3\text{O}_{7-8}$  Superconducting Oxide from Highly Undercooled Melt by Containerless Processing," *J. Cryst. Growth*, 200, 118-25 (1999).
8. K. Nagashio, K. Kuribayashi and Y. Takamura, "Phase Selection of Peritectic Phase in Undercooled Nd-based Superconducting Oxides," *Acta Mater.*, 48, 3049-57 (2000).
9. K. Nagashio and K. Kuribayashi, "Rapid Solidification of  $\text{Y}_3\text{Al}_5\text{O}_{12}$  Garnet from Hypercooled Melt," *Acta Mater.*, 49, 1947-55 (2001).
10. J.K.R. Weber, J.J. Felten, B. Cho, and P.C. Nordine, "Glass Fibers of Pure and Erbium- or Neodymium-doped Yttria-Alumina Compositions," *Nature* 393, 769-71 (1998).
11. I-Ching Lin, A. Navrotsky, J.K.R. Weber, and P.C. Nordine, "Thermodynamics of glass formation and metastable solidification of molten  $\text{Y}_3\text{Al}_5\text{O}_{12}$ ," *J. Non-Cryst. Solids*, 243, 273-276 (1999).
12. J.K.R. Weber, J.G. Abadie, A.D. Hixson, P.C. Nordine, and G.A. Jerman, "Glass Formation and Polyamorphism in Rare Earth Oxide-Alumina Compositions," *J. Am. Ceram. Soc.* 83, 1868-72 (2000).
13. K. Nagashio, W.H. Hofmeister, D.E. Gustafson, A. Altgilbers, R.J. Bayuzick and K. Kuribayashi, "Formation of  $\text{NdBa}_2\text{Cu}_3\text{O}_{7-8}$  Amorphous Phase by Combining Aero-Acoustic Levitation and Splat Quenching," *J. Mater. Res.*, 16, 138-45 (2001).
14. K. Nagashio, Y. Takamura and K. Kuribayashi, "Containerless Solidification of Peritectic and Eutectic Ceramics using Aero-Acoustic Levitator," *Mater. Sci. Forum*, 329/330, 173-78 (2000).
15. K. Nagashio, K. Kuribayashi and Y. Takamura, "Direct Crystallization of  $\text{Y}_3\text{Fe}_5\text{O}_{12}$  Garnet by Containerless Solidification Processing," *Metall. Trans.*, 42, 233-37 (2001).
16. C. D. Anderson, W. H. Hofmeister, and R. J. Bayuzick, "Liquidus Temperatures in the Ti-Al System", *Metall. Trans.* 24A, 61-66 (1993).
17. C. D. Anderson, W. H. Hofmeister, and R. J. Bayuzick, "Solidification Kinetics and Metastable Phase Formation in Binary Ti-Al", *Metall. Trans.* 23A, 2699-2714 (1992).
18. J.K.R. Weber, P.C. Nordine, K.C. Goretti, and R.B. Poeppel, "Effects of oxygen pressure on the structure of Y-Ba-Cu-O Materials formed by Containerless Melting and Solidification," *J. Mater. Res.*, 9, 1657-60 (1994).

19. R.F. Cooper, J.B. Faselow, J.K.R. Weber, D.R. Merkley and D.B. Poker, "Dynamics of Oxidation of a Fe<sub>2</sub>+ AAL2011 6 Aluminosilicate (Basaltic) Melt," *Science*, 274, 1173-76 (1996).
20. R.I. Sheldon, G.H. Rinehart, S. Krishnan and P.C. Nordine, "The Optical Properties of Liquid Cerium at 632.8 nm," *Mater. Sci. Eng. B79*, 113-122 (2001).
21. J.W.S. Rayleigh, "On the Capillary Phenomena of Jets", *Proceedings of the Royal Society of London*, 29, 71-79 (1879).
22. H. Lamb, "On the Oscillations of a Viscous Liquid Globe", *Proceedings of the London Math. Society*, 13, 51-66 (1881).
23. I. Egry, E. Ricci, R. Novakovic, and S. Ozawa, "Surface tension of liquid metals and alloys--recent developments", *Adv. Colloid Interface Sci.* 159, 198-212 (2010).
24. S. Krishnan, C. D. Anderson, J. K. R. Weber, P. C. Nordine, W. H. Hofmeister, and R. J. Bayuzick, "Optical Properties and Spectral Emissivities at 632.8 nm in the Titanium-Aluminum System," *Metall. Trans.* 24A, 67-72 (1993).
25. Krishnan, S., J. K. R. Weber, R. A. Schiffman, P. C. Nordine, and R. A. Reed, "Refractive Index of Liquid Aluminum Oxide at 0.6328  $\mu\text{m}$ ," *J. Am. Ceram. Soc.* 74, 881 (1991).
26. J.K.R. Weber, S. Krishnan, C.D. Anderson and P.C. Nordine, "Spectral Absorption Coefficient of Liquid Aluminum Oxide from 0.385-0.780  $\mu\text{m}$ ," *J. Am. Ceram. Soc.*, 78, 583-87 (1995).
27. J.K.R. Weber, S. Krishnan and P.C. Nordine, "Effects of Melt Chemistry on the Spectral Absorption Coefficient of Liquid Aluminum Oxide," *J. Am. Ceram. Soc.*, 78, 3067-3071 (1995).
28. Krishnan, S., J. K. R. Weber, C. D. Anderson, P. C. Nordine, and R. I. Sheldon, "Spectral Emissivity and Optical Properties at  $\lambda = 632.8$  nm for Liquid Uranium and Zirconium at High Temperatures," *J. Nucl. Mater.* 203, 112-121 (1993).
29. R.I. Sheldon, G.H. Rinehart, J.C. Lashley, C.E. Van Pelt, P.C. Nordine, S. Krishnan, J.K.R. Weber, "The optical properties of liquid plutonium at 632.8 nm", *J. Nucl. Mater.* 312, 207-211 (2003).
30. A.B. Biswas, J.K.R. Weber and P.C. Nordine, "Cr<sup>3+</sup> Fluorescence in Containerless Melt-purified Aluminum Oxide" *J. Mater. Res.*, 10, 1823-27 (1995).
31. P.C. Nordine, J.K.R. Weber and J.G. Abadie, "Properties of high-temperature melts using levitation," *Pure Appl. Chem.*, 72, 2127-36 (2000).
32. Weber, J. K. R., J.J. Felten and P. C. Nordine, "Laser hearth melt processing of ceramic materials," *Rev. Sci. Instrum.* 67, 522-524 (1996).

