

NetXPTO - LinkPlanner

May 22, 2018

Contents

1 Preface	5
2 Introduction	6
3 Simulator Structure	7
3.1 System	7
3.2 Blocks	7
3.3 Signals	7
3.4 Log File	8
3.4.1 Introduction	8
3.4.2 Parameters	8
3.4.3 Output File	9
3.4.4 Testing Log File	10
Bibliography	11
3.5 Input Parameters System	11
3.5.1 Introduction	11
3.5.2 How To Include The IPS In Your System	12
4 Development Cycle	15
5 Visualizer	16
6 Case Studies	17
6.1 BPSK Transmission System	18
6.1.1 Theoretical Analysis	18
6.1.2 Simulation Analysis	19
6.1.3 Comparative Analysis	23
Bibliography	25
6.2 Quantum Random Number Generator	26
6.2.1 Theoretical Analysis	26
6.2.2 Simulation Analysis	28

<i>Contents</i>	2
6.2.3 Experimental Analysis	33
6.2.4 Open Issues	35
Bibliography	36
6.3 Classical Multi-Party Computation	37
6.3.1 Introduction	37
6.3.2 Two-Party Computation	38
6.3.3 Party Behavior Models	38
6.3.4 MPC Problems and Solutions	39
6.3.5 Garbled Circuit Protocol	40
6.3.6 Hardware Description Languages	40
6.3.7 TinyGarble	41
6.3.8 ARM2GC	41
Bibliography	42
6.4 Quantum Multi-Party Computation	43
6.4.1 Our Approach	43
Bibliography	46
7 Library	47
7.1 Add	48
7.2 Alice QKD	49
7.3 Balanced Beam Splitter	51
7.4 Bit Error Rate	52
7.5 Binary Source	54
7.6 Bob QKD	58
7.7 Bit Decider	59
7.8 Clock	60
7.9 Clock_20171219	62
7.10 Coupler 2 by 2	65
7.11 Decoder	66
7.12 Discrete To Continuous Time	68
7.13 Electrical Signal Generator	70
7.13.1 ContinuousWave	70
7.14 Fork	72
7.15 Gaussian Source	73
7.16 MQAM Receiver	75
7.17 Ideal Amplifier	79
7.18 IQ Modulator	81
7.19 Local Oscillator	83
7.20 Local Oscillator	85
7.21 MQAM Mapper	88
7.22 MQAM Transmitter	91
7.23 Netxpto	95
7.23.1 Version 20180118	97

<i>Contents</i>	3
7.24 Polarization_rotator_20170113	98
7.25 Probability Estimator	100
7.26 Rotator Linear Polarizer	103
7.27 Optical Switch	105
7.28 Optical Hybrid	106
7.29 Photoelectron Generator	108
7.30 Pulse Shaper	113
7.31 Sampler	115
7.32 Single Photon Receiver	117
7.33 Sink	121
7.34 SNR of the Photoelectron Generator	122
Bibliography	127
7.35 SOP Modulator	128
7.36 White Noise	131
8 Mathlab Tools	133
8.1 Generation of AWG Compatible Signals	134
8.1.1 sgnToWfm.m	134
8.1.2 sgnToWfm_20171121.m	135
8.1.3 Loading a signal to the Tektronix AWG70002A	137
9 Algorithms	141
9.1 Fast Fourier Transform	142
9.2 Overlap-Save Method	158
9.3 Filter	182
9.4 Hilbert Transform	190
10 Code Development Guidelines	193
11 Building C++ Projects Without Visual Studio	194
11.1 Installing Microsoft Visual C++ Build Tools	194
11.2 Adding Path To System Variables	194
11.3 How To Use MSBuild To Build Your Projects	195
11.4 Known Issues	195
11.4.1 Missing ucrtbased.dll	195
12 Git Helper	196
12.1 Data Model	196
12.2 Refs	198
12.3 Tags	198
12.4 Branch	198
12.5 Heads	198
12.6 Database Folders and Files	198
12.6.1 Objects Folder	198

12.6.2	Refs Folder	199
12.7	Git Spaces	199
12.8	Workspace	200
12.9	Index	200
12.10	Merge	200
12.10.1	Fast-Forward Merge	200
12.10.2	Resolve	200
12.10.3	Recursive	200
12.10.4	Octopus	200
12.10.5	Ours	200
12.10.6	Subtree	200
12.10.7	Custom	200
12.11	Commands	200
12.11.1	Porcelain Commands	200
12.11.2	Plumbing Commands	201
12.12	The Configuration Files	202
12.13	Pack Files	202
12.14	Applications	202
12.14.1	Meld	202
12.14.2	GitKraken	202
12.15	Error Messages	202
12.15.1	Large files detected	202
13	Simulating VHDL programs with GHDL	204
13.1	Adding Path To System Variables	204
13.2	Using GHDL To Simulate VHDL Programs	205
13.2.1	Requirements	205
13.2.2	Option 1	205
13.2.3	Option 2	205
13.2.4	Simulation Output	205

Chapter 2

Introduction

LinkPlanner is devoted to the simulation of telecommunication systems. We are going to focus initially in both classical and quantum optical communication systems.

LinkPlanner is a signals open-source simulator. Developed in C++14 language.

The IDE use is the MS Visual Studio, with the Visual Studio 2015 (v140) Platform Toolset, and with a Target Platform Version 8.1.

Chapter 3

Simulator Structure

LinkPlanner is a signals open-source simulator.

The major entity is the system.

A system comprises a set of blocks.

The blocks interact with each other through signals.

3.1 System

3.2 Blocks

3.3 Signals

List of available signals:

- Signal

PhotonStreamXY

A single photon is described by two amplitudes A_x and A_y and a phase difference between them, δ . This way, the signal PhotonStreamXY is a structure with two complex numbers, x and y .

PhotonStreamXY_MP

The multi-path signals are used to simulate the propagation of a quantum signal when the signal can follow multiple paths. The signal has information about all possible paths, and a measurement performed in one path immediately affects all other possible paths. From a Quantum approach, when a single photon with a certain polarization angle reaches a 50 : 50 Polarizer, it has a certain probability of follow one path or another. In order to simulate this, we have to use a signal PhotonStreamXY_MP, which contains information about all the paths available. In this case, we have two possible paths: 0 related with horizontal and 1 related with vertical. This signal is the same in both outputs of the polarizer. The first decision is made by the detector placed on horizontal axis. Depending on that decision, the information about the other path 1 is changed according to the result of the path 0. This way, we guarantee the randomness of the process. So, signal PhotonStreamXY_MP is a structure of two PhotonStreamXY indexed by its path.

3.4 Log File

3.4.1 Introduction

The Log File allows for a detailed analysis of a simulation. It will output a file containing the timestamp when a block is initialized, the number of samples in the buffer ready to be processed for each input signal, the signal buffer space for each output signal and the amount of time in seconds that took to run each block. Log File is enabled by default, so no change is required. If you want to turn it off, you must call the set method for the `logValue` and pass `false` as argument. This must be done before method `run()` is called, as shown in line 125 of Figure 3.1.

```

115
116  // #####
117  // ##### System Declaration and Initialization #####
118  // #####
119
120 System MainSystem{ vector<Block*> { &B1, &B2, &B3, &B4, &B5, &B6, &B7, &B8} };
121
122 // #####
123 // ##### System Run #####
124 // #####
125 MainSystem.setLogValue(false);
126 MainSystem.run();

```

Figure 3.1: Disabling Log File

3.4.2 Parameters


The Log File accepts two parameters: `logFileName` which correspond to the name of the output file, i.e., the file that will contain all the information listed above and `logValue` which will enable the Log File if `true` and will disable it if `false`.

Log File Parameters		
Parameter	Type	Default Value
<code>logFileName</code>	string	"log.txt"
<code>logValue</code>	bool	true

Available Set Methods		
Parameter	Type	Comments
<code>setLogFileName(string newName)</code>	void	Sets the name of the output file to the name given as argument
<code>setLogValue(bool value)</code>	void	Sets the value of <code>logValue</code> to the value given as argument

3.4.3 Output File

The output file will contain information about each block. From top to bottom, the output file shows the timestamp (time when the block was started), the number of samples in the buffer ready to be processed for each input signal and the signal buffer space for each output signal. This information is taken before the block has been executed. The amount of time, in seconds, that each block took to run, is also registered. Figure 3.2 shows a portion of an output file. In this example, 4 blocks have been run: MQamTransmitter, LocalOscillator, BalancedBeamSplitter and I_HomodyneReceiver. In the case of the I_HomodyneReceiver block we can see that the block started being ran at 23:27:37 and finished running 0.004 seconds later.

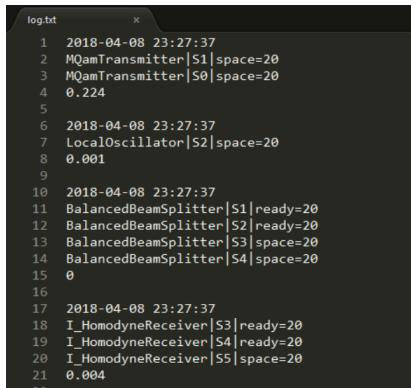

```

log.txt
1 2018-04-08 23:27:37
2 MQamTransmitter|S1|space=20
3 MQamTransmitter|S0|space=20
4 0.224
5
6 2018-04-08 23:27:37
7 LocalOscillator|S2|space=20
8 0.001
9
10 2018-04-08 23:27:37
11 BalancedBeamSplitter|S1|ready=20
12 BalancedBeamSplitter|S2|ready=20
13 BalancedBeamSplitter|S3|space=20
14 BalancedBeamSplitter|S4|space=20
15 0
16
17 2018-04-08 23:27:37
18 I_HomodyneReceiver|S3|ready=20
19 I_HomodyneReceiver|S4|ready=20
20 I_HomodyneReceiver|S5|space=20
21 0.004

```

Figure 3.2: Output File Example

Figure 3.3 shows a portion of code that consists in the declaration and initialization of the I_HomodyneReceiver block. In line 97, we can see that the block has 2 input signals, S_3 and S_4 , and is assigned 1 output signal, S_5 . Going back to Figure 3.2 we can observe that S_3 and S_4 have 20 samples ready to be processed and the buffer of S_5 is empty.


```

97  I_HomodyneReceiver B4{ vector<Signal*> {&S3, &S4}, vector<Signal*> {&S5} };
98  B4.useShotNoise(true);
99  B4.setElectricalNoiseSpectralDensity(electricalNoiseAmplitude);
100 B4.setGain(amplification);
101 B4.setResponsivity(responsivity);
102 B4.setSaveInternalSignals(true);
103

```

Figure 3.3: I-Homodyne Receiver Block Declaration

The list of the input parameters loaded from a file is presented at the top of the output file, as shown in Figure 3.4.

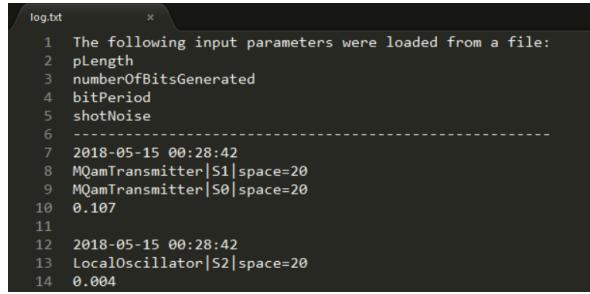

```
log.txt
1 The following input parameters were loaded from a file:
2 pLength
3 numberOfBitsGenerated
4 bitPeriod
5 shotNoise
6 -----
7 2018-05-15 00:28:42
8 MQamTransmitter|S1|space=20
9 MQamTransmitter|S0|space=20
10 0.107
11
12 2018-05-15 00:28:42
13 Localoscillator|S2|space=20
14 0.004
```

Figure 3.4: Four input parameters where loaded from a file

3.4.4 Testing Log File

In directory *doc/tex/chapter/simulator_structure/test_log_file/bpsk_system/* there is a copy of the BPSK system. You may use it to test the Log File. The main method is located in file *bpsk_system_sdf.cpp*

3.5 Input Parameters System


3.5.1 Introduction

With the Input Parameters System (IPS) it is possible to read the input parameters from a file.

Format Of The Input File

 Figure 3.5, it is possible to observe the contents of the file **input_parameters_0.txt** used to load the values of some of the BPSK system's input parameters. The input file must respect the following properties:

1. Input parameter values can be changed by adding a line in the following format: **paramName=newValue**, where **paramName** is the name of the input parameter and **newValue** is the value to be assigned. Line 3 of **input_parameters_0.txt** changes the value of input parameter **pLength** to 5.
2. IPS supports scientific notation. In lines 6 and 8 of **input_parameters_0.txt**, input parameters **numberOfBitsGenerated** and **bitPeriod** are assigned values in scientific notation. This notation works for the lower case character **e** and the upper case character **E**.
3. If an input parameters is assigned the wrong type of value, method **readSystemInputParameters()** will throw an exception. A list containing all changed input parameters will be available at the top of the log file.
4. Not all input parameters need to be changed. The BPSK system has 15 input parameters, and **input_parameters_0.txt** is only changing 4 of them.
5. The IPS supports comments in the form of the characters **//**. The comments will only be recognized if placed at the beginning of a line.

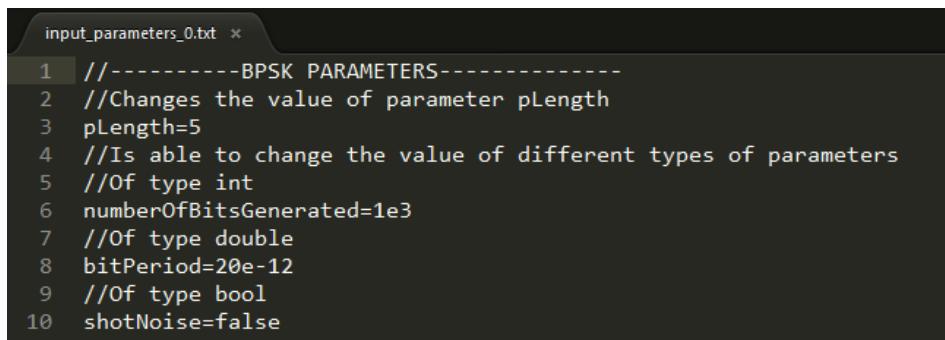

```

input_parameters_0.txt *
1 //-----BPSK PARAMETERS-----
2 //Changes the value of parameter pLength
3 pLength=5
4 //Is able to change the value of different types of parameters
5 //Of type int
6 numberOfBitsGenerated=1e3
7 //Of type double
8 bitPeriod=20e-12
9 //Of type bool
10 shotNoise=false

```

Figure 3.5: Content of file **input_parameters_0.txt**

Loading Input Parameters From A File

Execute the following command in the Command Line:

~~`\some_system.exe <input_file_path> <output_directory>`~~

~~`\some_system.exe <input_file_path> <output_directory>`~~, where **some_system.exe** is the name of the executable generated after compiling the project. In the case of the BPSK system, the executable is **bpsk_system.exe**; **<input_file_path>** is the path to the file containing the new input parameters; **<output_directory>** is the directory where the output signals will be written into.

3.5.2 How To Include The IPS In Your System

In order to use the IPS in your system some requirements must be met. In this illustrative example, we will use the BPSK System:

1. Your system must include **netxpto_20180418.h** or later. Previous versions of netxpto do not support the IPS.
2. Create a class that will contain the system input parameters. This class must be a derived class of **SystemInputParameters**. In this case the created class is called **BPSKInputParameters**.
3. The created class must have 2 constructors: one that receives no arguments and calls the method **initializeInputParameterMap()**; one that receives **int argc** and **char*argv[]** as arguments and calls methods **initializeInputParameterMap()** and **readSystemInputParameters()**. Note that method **readSystemInputParameters()** is already implemented and may be called by the user. Only method **initializeInputParameterMap()** must be implemented.
4. The created class must contain the method **initializeInputParameterMap()** that will add all input parameters. You must implement this method. To add an input parameter you must call **addInputParameter(paramName,paramAddress)**, where **paramName** is a string that represents the name of your input parameter and **paramAddress** is the address of your input parameter. Only parameters of types **int**, **double** and **bool** are supported by the IPS. Parameters that are not of these types cannot be added in **initializeInputParameterMap()**.
5. The output folder of each signal must be changed. Method,

```
<SIGNAL>.setFolderName (<param>.getOutputFolderName ())
```

must be called in order to change the output directory of the signals. **<SIGNAL>** is the object of class Signal and **<param>** is the object of the input parameter class. An example is shown in Figure 3.6

6. Before running the MainSystem, the signals folder name and the list of loaded input parameters must be set. You only need to include the following lines before calling **MainSystem.run()**.

```

int main(int argc, char*argv[]) {
    (...)

    //System Declaration and Initialization
    System MainSystem{ vector<Block*> { &B1, &B2, &B3, &B4, &B5, &B6, &B7, &B8, &B9, &B10 } };
    MainSystem.setSignalsFolderName(param.getOutputFolderName());
    MainSystem.setLoadedInputParameters(param.getLoadedInputParameters());

    //System Run
    MainSystem.run();

    return 0;
}

```

The following code represents the class **BPSKInputParameters** and can be changed according to the system you are working on.

```

class BPSKInputParameters : public SystemInputParameters {
public:
    //INPUT PARAMETERS
    int numberOfBitsReceived{ -1 };
    int numberOfBitsGenerated{ 1000 };
    int samplesPerSymbol = 16;
    int pLength = 5; //The default value of pLength is 5
    double bitPeriod = 20e-12;
    double rollOffFactor = 0.3;
    double signalOutputPower_dBm = -20;
    double localOscillatorPower_dBm = 0;
    double localOscillatorPhase = 0;
    vector<t_iqValues> iqAmplitudeValues = { { -1, 0 }, { 1, 0 } };
    array<t_complex, 4> transferMatrix = { { 1 / sqrt(2), 1 / sqrt(2), 1 / sqrt(2), -1 / sqrt(2) } };
    double responsivity = 1;
    double amplification = 1e6;
    double electricalNoiseAmplitude = 5e-4*sqrt(2);
    int samplesToSkip = 8 * samplesPerSymbol;
    int bufferLength = 20;
    bool shotNoise = false;

    /* Initializes default input parameters */
    BPSKInputParameters() : SystemInputParameters() {
        initializeInputParameterMap();
    }

    /* Initializes input parameters according to the program arguments */
    /* Usage: .\bpsk_system.exe <input_parameters.txt> <output_directory> */
    BPSKInputParameters(int argc, char*argv[]) : SystemInputParameters(argc,argv) {
        initializeInputParameterMap();
        readSystemInputParameters();
    }

    //Each parameter must be added to the parameter map by calling addInputParameter(string,param*)
    void initializeInputParameterMap() {
        addInputParameter("numberOfBitsReceived", &numberOfBitsReceived);
        addInputParameter("numberOfBitsGenerated", &numberOfBitsGenerated);
        addInputParameter("samplesPerSymbol", &samplesPerSymbol);
        addInputParameter("pLength", &pLength);
        addInputParameter("bitPeriod", &bitPeriod);
        addInputParameter("rollOffFactor", &rollOffFactor);
        addInputParameter("signalOutputPower_dBm", &signalOutputPower_dBm);
        addInputParameter("localOscillatorPower_dBm", &localOscillatorPower_dBm);
        addInputParameter("localOscillatorPhase", &localOscillatorPhase);
    }
}

```

```

    addInputParameter("responsivity", &responsivity);
    addInputParameter("amplification", &amplification);
    addInputParameter("electricalNoiseAmplitude", &electricalNoiseAmplitude);
    addInputParameter("samplesToSkip", &samplesToSkip);
    addInputParameter("bufferLength", &bufferLength);
    addInputParameter("shotNoise", &shotNoise);
}
;

```

SystemInputParameters - Methods		
Method	Type	Comments
addInputParameter(string name, int* variable)	void	Adds an input parameter whose value is of type int
addInputParameter(string name, double* variable)	void	Adds an input parameter whose value is of type double
addInputParameter(string name, bool* variable)	void	Adds an input parameter whose value is of type bool
readSystemInputParameters()	void	Reads the input parameters from a file.

The input parameter class should have 2 constructors. The **BPSKInputParameters** class, has the following constructors available:

BPSKInputParameters - Constructors	
Constructors	Comments
BPSKInputParameters()	Creates an object of BPSKInputParameters with the default input parameters' values
BPSKInputParameters(int argc, char*argv[])	Creates an object of BPSKInputParameters and loads the values according to the program arguments passed in the command line

In order to use the values of the input parameters, an object of the input parameter class must be created. The following figure shows the example of the BPSKInputParameters.

```

/* Usage: .\bpsk_system.exe <input_parameters.txt> <output_directory> */
int main(int argc, char *argv[]) {
    BPSKInputParameters param(argc, argv);

    // ##### Signals Declaration and Initialization #####
    // ##### S0.sgn #####
    Binary S0("S0.sgn");
    S0.setBufferLength(param.bufferLength);
    S0.setFolderName(param.getOutputFolderName());

    OpticalSignal S1("S1.sgn");
    S1.setBufferLength(param.bufferLength);
    S1.setFolderName(param.getOutputFolderName());
}

```

Figure 3.6: An object of BPSKInputParameters is created. Parameter bufferLength is accessed directly

Chapter 4

Development Cycle

The NetXPTO-LinkPlanner has been developed by several people using git as a version control system. The NetXPTO-LinkPlanner repository is located in the GitHub site <http://github.com/netxpto/linkplanner>. The more updated functional version of the software is in the branch master. Master should be considered a functional beta version of the software. Periodically new releases are delivered from the master branch under the branch name Release<Year><Month><Day>. The integration of the work of all people is performed by Armando Nolasco Pinto in the branch Develop. Each developer has his/her own branch with his/her name.

Chapter 5

Visualizer

visualizer

Chapter 6

Case Studies

6.1 BPSK Transmission System

Student Name	:	André Mourato (2018/01/28 - 2018/02/27) Daniel Pereira (2017/09/01 - 2017/11/16)
Goal	:	Estimate the BER in a Binary Phase Shift Keying optical transmission system with additive white Gaussian noise. Comparison with theoretical results.
Directory	:	sdf/bpsk_system

Binary Phase Shift Keying (BPSK) is the simplest form of Phase Shift Keying (PSK), in which binary information is encoded into a two state constellation with the states being separated by a phase shift of π (see Figure 6.1).

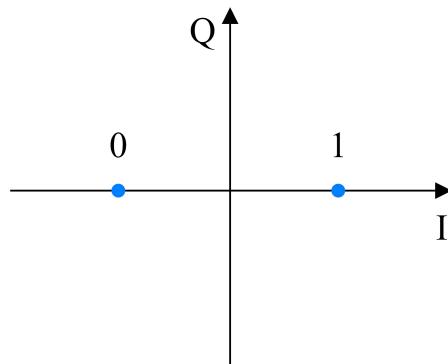


Figure 6.1: BPSK symbol constellation.

White noise is a random signal with equal intensity at all frequencies, having a constant power spectral density. White noise is said to be Gaussian (WGN) if its samples follow a normal distribution with zero mean and a certain variance σ^2 . For WGN its spectral density equals its variance. For the purpose of this work, additive WGN is used to model thermal noise at the receivers.

The purpose of this system is to simulate BPSK transmission in back-to-back configuration with additive WGN at the receiver and to perform an accurate estimation of the BER and validate the estimation using theoretical values.

6.1.1 Theoretical Analysis

The output of the system with added gaussian noise follows a normal distribution, whose first probabilistic moment can be readily obtained by knowledge of the optical power of the received signal and local oscillator,

$$m_i = 2\sqrt{P_L P_S} G_{ele} \cos(\Delta\theta_i), \quad (6.1)$$

where P_L and P_S are the optical powers, in watts, of the local oscillator and signal, respectively, G_{ele} is the gain of the trans-impedance amplifier in the coherent receiver and

$\Delta\theta_i$ is the phase difference between the local oscillator and the signal, for BPSK this takes the values π and 0, in which case (6.1) can be reduced to,

$$m_i = (-1)^{i+1} 2 \sqrt{P_L P_S} G_{ele}, \quad i = 0, 1. \quad (6.2)$$

The second moment is directly chosen by inputting the spectral density of the noise σ^2 , and thus is known *a priori*.

Both probabilist moments being known, the probability distribution of measurement results is given by a simple normal distribution,

$$f(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-\frac{(x-m_i)^2}{2\sigma^2}}. \quad (6.3)$$

The BER is calculated in the following manner,

$$BER = \frac{1}{2} \int_0^{+\infty} f(x|\Delta\theta = \pi) dx + \frac{1}{2} \int_{-\infty}^0 f(x|\Delta\theta = 0) dx, \quad (6.4)$$

given the symmetry of the system, this can be simplified to,

$$BER = \int_0^{+\infty} f(x|\Delta\theta = \pi) dx = \frac{1}{2} \operatorname{erfc} \left(\frac{-m_0}{\sqrt{2}\sigma} \right) \quad (6.5)$$

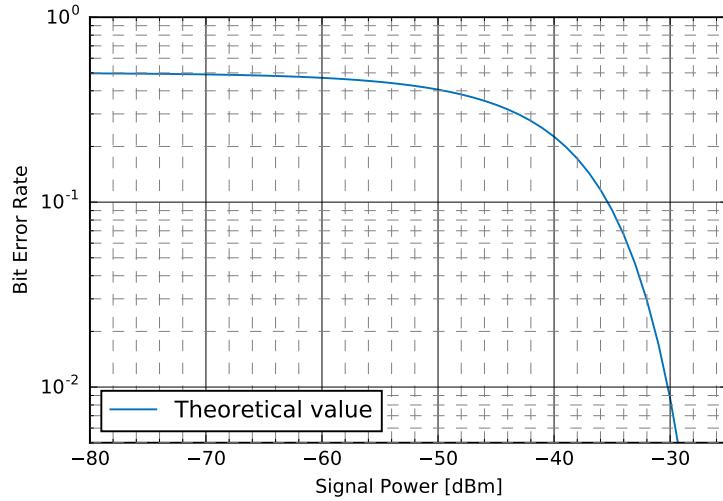


Figure 6.2: Bit Error Rate in function of the signal power in dBm at a constant local oscillator power level of 0 dBm.

6.1.2 Simulation Analysis

A diagram of the system being simulated is presented in the Figure 6.3. A random binary sequence is generated and encoded in an optical signal using BPSK modulation. The decoding of the optical signal is accomplished by an homodyne receiver, which combines the

signal with a local oscillator. The received binary signal is compared with the transmitted binary signal in order to estimate the Bit Error Rate (BER). The simulation is repeated for multiple signal power levels. Each corresponding BER is recorded and plotted against the expectation value.

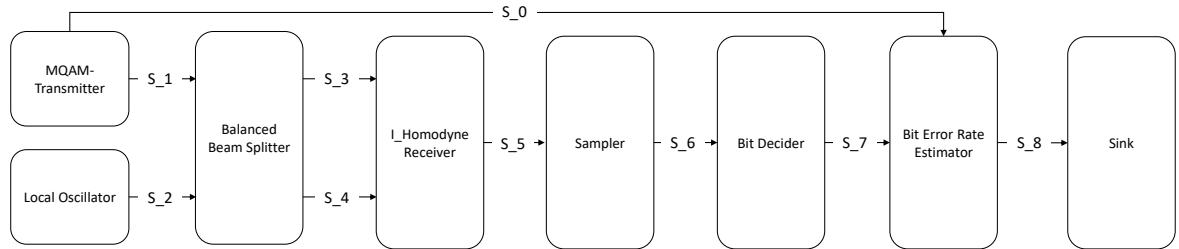


Figure 6.3: Overview of the BPSK system being simulated.

Required files

Header Files		
File	Comments	Status
add_20171116.h		✓
balanced_beam_splitter_20180124.h		✓
binary_source_20180118.h		✓
bit_decider_20170818.h		✓
bit_error_rate_20171810.h		✓
discrete_to_continuous_time_20180118.h		✓
i_homodyne_receiver_20180124.h		✓
ideal_amplifier_20180118.h		✓
iq_modulator_20180130.h		✓
local_oscillator_20180130.h		✓
m_qam_mapper_20180118.h		✓
m_qam_transmitter_20180118.h		✓
netxpto_20180418.h		✓
photodiode_old_20180118.h		✓
pulse_shaper_20180118.h		✓
sampler_20171116.h		✓
sink_20180118.h		✓
super_block_interface_20180118.h		✓
ti_amplifier_20180102.h		✓
white_noise_20180118.h		✓

Source Files		
File	Comments	Status
add_20171116.cpp		✓
balanced_beam_splitter_20180124.cpp		✓
binary_source_20180118.cpp		✓
bit_decider_20170818.cpp		✓
bit_error_rate_20171810.cpp		✓
discrete_to_continuous_time_20180118.cpp		✓
i_homodyne_receiver_20180124.cpp		✓
ideal_amplifier_20180118.cpp		✓
iq_modulator_20180130.cpp		✓
local_oscillator_20180130.cpp		✓
m_qam_mapper_20180118.cpp		✓
m_qam_transmitter_20180118.cpp		✓
netxpto_20180418.cpp		✓
photodiode_old_20180118.cpp		✓
pulse_shaper_20180118.cpp		✓
sampler_20171116.cpp		✓
sink_20180118.cpp		✓
super_block_interface_20180118.cpp		✓
ti_amplifier_20180102.cpp		✓
white_noise_20180118.cpp		✓

System Input Parameters

This system takes into account the following input parameters:

System Input Parameters		
Parameter	Default Value	Comments
numberOfBitsReceived	-1	
numberOfBitsGenerated	1000	
samplesPerSymbol	16	
pLength	5	
bitPeriod	20×10^{-12}	
rollOffFactor	0.3	
signalOutputPower_dBm	-20	
localOscillatorPower_dBm	0	
localOscillatorPhase	0	
iqAmplitudesValues	$\{ \{-1, 0\}, \{1, 0\} \}$	
transferMatrix	$\{ \{\frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}, \frac{-1}{\sqrt{2}}\} \}$	
responsivity	1	
amplification	10^6	
electricalNoiseAmplitude	$5 \times 10^{-4}\sqrt{2}$	
samplesToSkip	$8 \times \text{samplesPerSymbol}$	
bufferLength	20	
shotNoise	false	

Inputs

This system takes no inputs.

Outputs

This system outputs the following objects:

System Output Signals	
Signal	Associated File
Initial Binary String (S_0)	S0.sgn
Optical Signal with coded Binary String (S_1)	S1.sgn
Local Oscillator Optical Signal (S_2)	S2.sgn
Beam Splitter Outputs (S_3, S_4)	S3.sgn & S4.sgn
Homodyne Receiver Electrical Output (S_5)	S5.sgn
Sampler Output (S_6)	S6.sgn
Decoded Binary String (S_7)	S7.sgn
BER Result String (S_8)	S8.sgn
Report	Associated File
Bit Error Rate Report	BER.txt

Bit Error Rate - Simulation Results

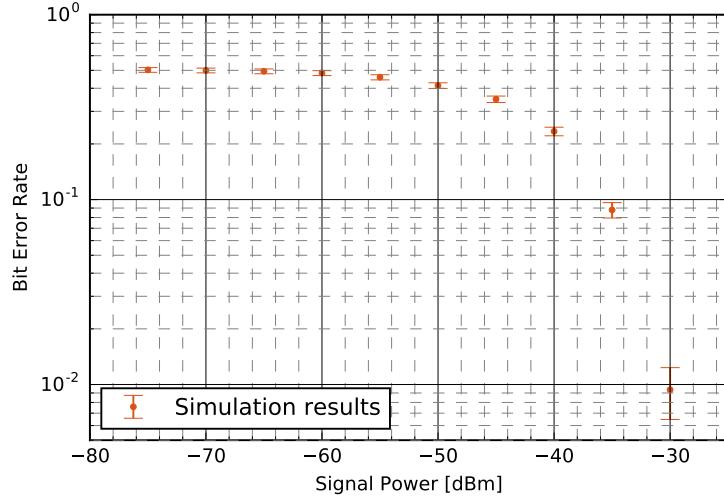


Figure 6.4: Bit Error Rate in function of the signal power in dBm at a constant local oscillator power level of 0 dBm.

6.1.3 Comparative Analysis

The following results show the dependence of the error rate with the signal power assuming a constant Local Oscillator power of 0 dBm, the signal power was evaluated at levels between -70 and -25 dBm, in steps of 5 dBm between each. The simulation results are presented in orange with the computed lower and upper bounds, while the expected value, obtained from (6.5), is presented as a full blue line. A close agreement is observed between the simulation results and the expected value. The noise spectral density was set at $5 \times 10^{-4}\sqrt{2} \text{ V}^2$ [1].

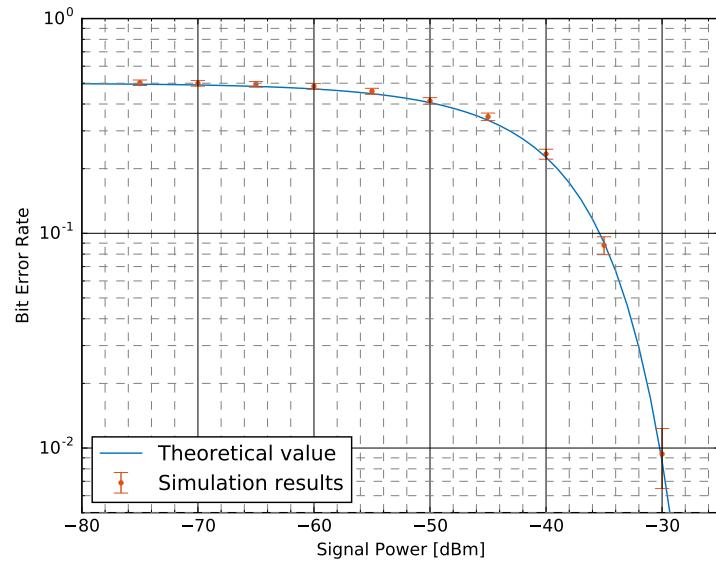


Figure 6.5: Bit Error Rate in function of the signal power in dBm at a constant local oscillator power level of 0 dBm. Theoretical values are presented as a full blue line while the simulated results are presented as a errorbar plot in orange, with the upper and lower bound computed in accordance with the method described in 7.4

References

- [1] Thorlabs. *Thorlabs Balance Amplified Photodetectors: PDB4xx Series Operation Manual*. 2014.

6.2 Quantum Random Number Generator

Students Name	: Mariana Ramos (12/01/2018 - 11/04/2018)
Goal	: Simulate and implement an experimental setup of a Quantum Random Number Generator.
Directory	: sdf/quantum_random_number_generator.

True random numbers are indispensable in the field of cryptography [1]. There are two approaches for random number generation: the pseudorandom generation which are based on an algorithm implemented on a computer, and the physical random generators which consist in measuring some physical observable with random behaviour. Since classical physics description is deterministic, all classical processes are in principle predictable. Therefore, a true random number generator must be based on a quantum process [2].

In this chapter, it is presented the theoretical, the simulation and the experimental analysis of a quantum random generator based on the use of single photons linearly polarized at 45° .

6.2.1 Theoretical Analysis

One of the optical processes available as a source of randomness is the splitting of a polarized single photon beam. The principle of operation of the random generator is shown in figure 6.6. Each individual photon coming from the source is linearly polarized at 45° and has equal probability of be found in the horizontal (H) or in the vertical (V) output of the PBS. Quantum theory estimates for both cases that the individual choices are truly random, independent one from each other, and with a probability of $1/2$.

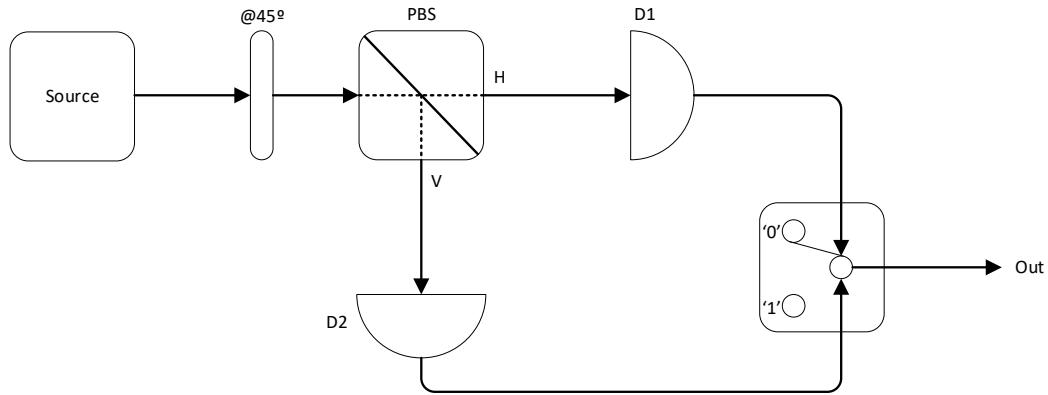


Figure 6.6: Source of randomness with a polarization beam splitter PBS where the incoming light is linearly polarized at 45° with respect to the PBS. Figure adapted from [2].

From a classical approach, the information is stored as binary bits that can take the logical value '0' or '1'. From a quantum approach, the information can be stored in quantum

bits or qubits for short. As a consequence of the superposition principle of quantum mechanics, qubits can not only represent the pure '0' or '1' states, but they can also represent a superposition of both. This way, qubits are governed by a quantum wave function ψ . Lets use the Dirac notation to represent the general state of the qubit:

$$|\psi\rangle = C_0|0\rangle + C_1|1\rangle, \quad (6.6)$$

and the normalization condition of $|\psi\rangle$ requires that $|C_0|^2 + |C_1|^2 = 1$. This way, the relative proportion of each of the binary states on a qubit is governed by the amplitude coefficients C_0 and C_1 . In the present example, we consider a linear polarization in which the two possible states are orthogonal, such that: $\langle 0|1\rangle = 0$. We define the $|0\rangle$ and $|1\rangle$ states to correspond to the horizontal and vertical polarization states, respectively:

$$|\psi\rangle = C_0|0\rangle + C_1|1\rangle \quad (6.7)$$

$$= C_0|0^\circ\rangle + C_1|90^\circ\rangle. \quad (6.8)$$

Amplitude coefficients C_0 and C_1 store the quantum information. Therefore, if one makes a measurement, the result will be '0' with probability $|C_0|^2$ or '1' with probability $|C_1|^2$. Moreover, the state of a single photon can be also described by a wave function as a column vector:

$$|\psi\rangle = \begin{pmatrix} C_0 \\ C_1 \end{pmatrix}, \quad (6.9)$$

which will be used in simulation analysis.

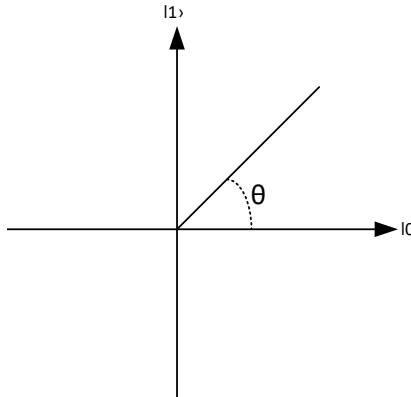


Figure 6.7: Representation of polarization states of a qubit in a bi-dimensional space.

As one can see in figure 6.7 the amplitude coefficients can be written as a function of θ :

$$C_0 = \cos(\theta) \quad (6.10)$$

$$C_1 = \sin(\theta). \quad (6.11)$$

According with the setup presented in figure 6.6 and considering the polarization angle $\theta = 45^\circ$, the single photon has the probability of reach **D1** and outputs a "0" is equals to $|\cos(\theta)|^2$ and the probability of reach **D2** and outputs a "1" is equals to $|\sin(\theta)|^2$, which in the case $\theta = 45^\circ$ both have the same value equals to 0.5.

6.2.2 Simulation Analysis

The simulation diagram of the setup described in the previous section is presented in figure 6.8. The linear polarizer has an input control signal (S1) which allows to change the rotation angle. Nevertheless, the only purpose is to generate a time and amplitude continuous real signal with the value of the rotation angle in degrees. In addition, the photons are generated by single photon source block at a rate defined by the clock rate. At the end of the simulation there is a circuit decision block which will outputs a binary signal with value "0" if the detector at the end of the horizontal path clicks or "1" if the detector at the end of the vertical path clicks.

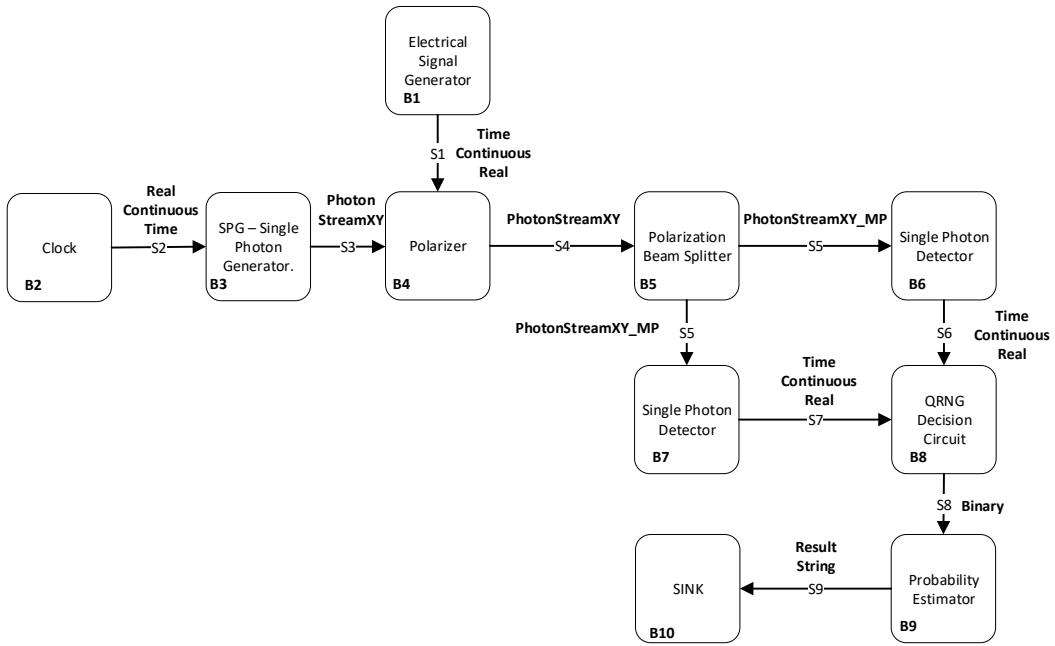


Figure 6.8: Block diagram of the simulation of a Quantum Random Generator.

In table 6.1 are presented the input parameters of the system.

Table 6.1: System Input Parameters

Parameter	Default Value
RateOfPhotons	1e6
NumberOfSamplesPerSymbol	16
PolarizerAngle	45.0

In table 6.2 are presented the system signals to implement the simulation presented in figure 6.8.

Table 6.2: System Signals

Signal name	Signal type
S1	TimeContinuousAmplitudeContinuousReal
S2	TimeContinuousAmplitudeContinuousReal
S3	PhotonStreamXY
S4	PhotonStreamXY
S5	PhotonStreamXYMP
S6	TimeContinuousAmplitudeContinuousReal
S7	TimeContinuousAmplitudeContinuousReal
S8	Binary
S9	Binary

Table 6.3 presents the header files used to implement the simulation as well as the specific parameters that should be set in each block. Finally, table 6.4 presents the source files.


Table 6.3: Header Files

File name	Description	Status
netxpto_20180118.h		✓
electrical_signal_generator_20180124.h	setFunction(), setGain()	✓
clock_20171219.h	ClockPeriod(1 / RateOfPhotons)	✓
polarization_beam_splitter_20180109.h		✓
polarizer_20180113.h		✓
single_photon_detector_20180111.h	setPath(0), setPath(1)	✓
single_photon_source_20171218.h		✓
probability_estimator_20180124.h		✓
sink.h		✓
qrng_decision_circuit.h		✓

Table 6.4: Source Files

File name	Description	Status
netxpto_20180118.cpp		✓
electrical_signal_generator_20180124.cpp		✓
clock_20171219.cpp		✓
polarization_beam_splitter_20180109.cpp		✓
polarizer_20180113.cpp		✓
single_photon_detector_20180111.cpp		✓
single_photon_source_20171218.cpp		✓
probability_estimator_20180124.cpp		✓
sink.cpp		✓
qrng_decision_circuit.cpp		✓
qrng_sdf.cpp		✓

Lets assume, for an angle of 45° , a number of samples $N = 1 \times 10^6$ and the expected probability of reach each detector of $\hat{p} = 0.5$. We have an error margin of $E = 1.288 \times 10^{-3}$, which is acceptable. This way, the simulation will be performed for $N = 1 \times 10^6$ samples for different angles of polarization shown in figure 6.9 with different error margin's values since the expected probability changes depending on the polarization angle.

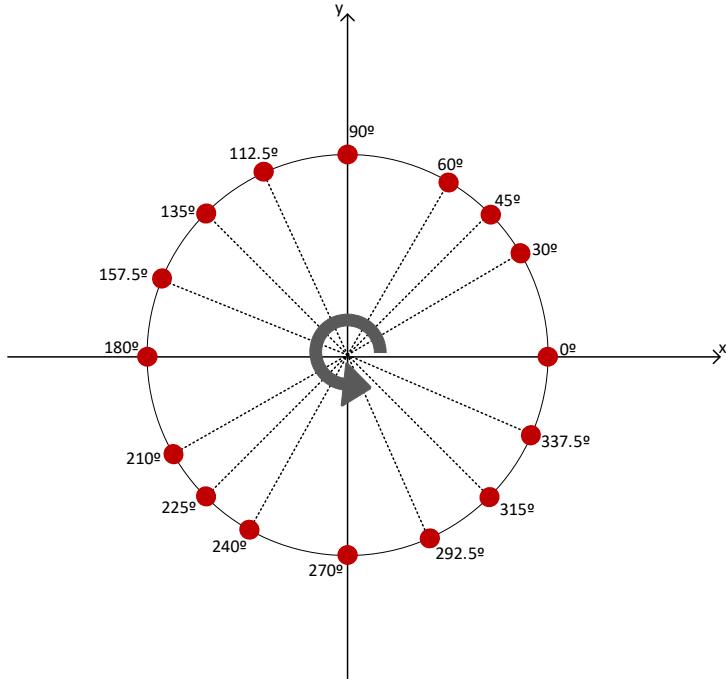Figure 6.9: Angles used to perform the qrng simulation for $N = 1 \times 10^6$ samples.

For a quantum random number generator with equal probability of obtain a "0" or "1" the polarizer must be set at 45° . This way, we have 50% possibilities to obtain a "0" and 50% of possibilities to obtain a "1" . This theoretical value meets the value obtained from the simulation when it is performed for the number of samples mentioned above.

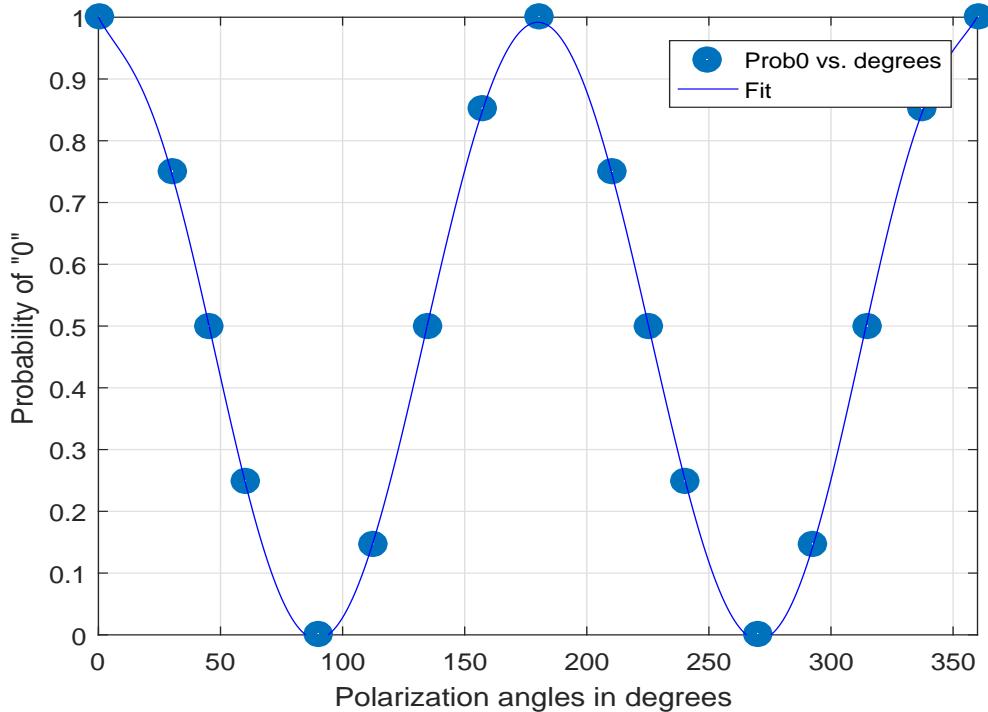


Figure 6.10: Probability of outputs a number "0" depending on the polarization angle.

Figure 6.10 shows the probability of a single photons reaches the detector placed on Horizontal axis depending on the polarization angle of the photon, and this way the output number is "0". The following table shows the goodness of the fit:

SSE:	0.0004785
R-square:	0.9998
Adjusted R-square:	0.9995
RMSE:	0.007734

On the other hand, figure 6.11 shows the probability of a single photon reaches the detector placed on Vertical component of the polarization beam splitter, and this way the output number is "1". As we can see in the figures the two detectors have complementary probabilities, i.e the summation of both values must be equals to 1. One can see that "Probability of 1" behaves almost like a sine function and "Probability of 0" behaves almost like a cosine function with a variable angle.

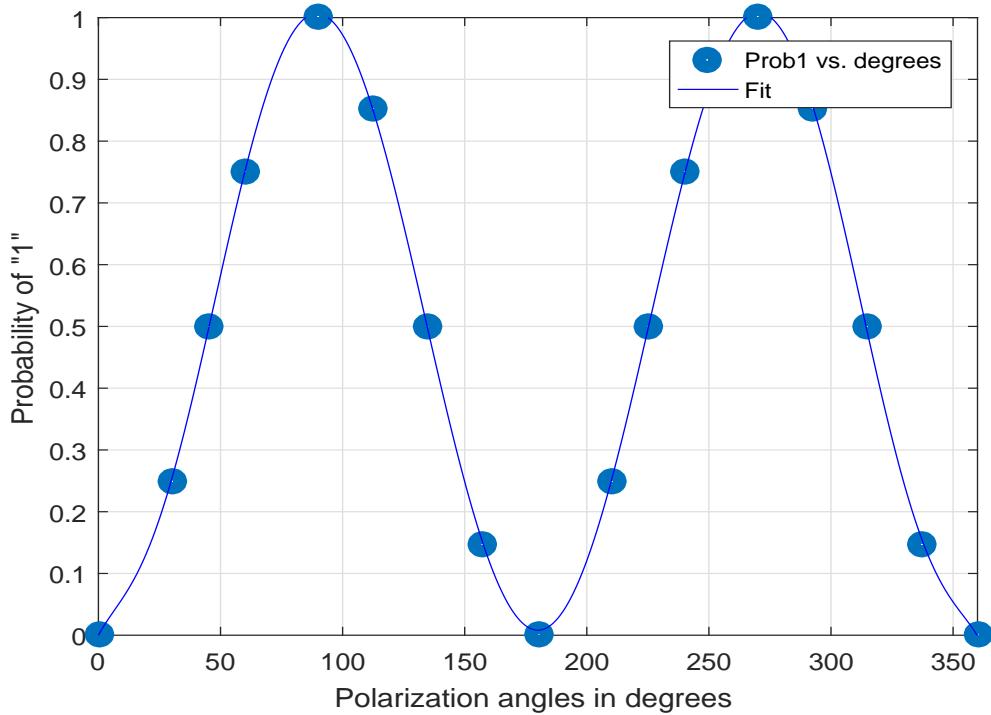


Figure 6.11: Probability of outputs a number "1" depending on the polarization angle.

The goodness of the fit presented in figure 6.11 is shown in the following table:

SSE:	0.0004785
R-square:	0.9998
Adjusted R-square:	0.9995
RMSE:	0.007734

The goodness of the fit is evaluated based on four parameters:

1. The sum of squares due to error (SSE), which measures the total deviation between the fit values and the values that the simulation outputs. This value is calculated from the expression

$$SSE = \sum_{i=1}^n w_i (y_i - \hat{y}_i)^2.$$

A value of SSE closer to 0 means that the model has a small random error component.

2. The R-square measures how good the fit in explaining the data.

$$R\text{-square} = 1 - \frac{SSE}{SST},$$

where,

$$SST = \sum_{i=1}^n w_i (y_i - \bar{y}_i)^2.$$

R-square can take a value between 0 and 1. If the value is closer to 1, it means that the fit better explains the total variation in the data around the average.

3. Degrees of freedom adjusted R-square uses the R-square and adjusts it based on the number of degrees of freedom.

$$\text{adjusted R-square} = 1 - \frac{\text{SSE}(n - 1)}{\text{SST}(v)},$$

where,

$$v = n - m,$$

where n is the number of values in test and m is the number of fitted coefficients estimated from the values in test. A value of adjusted R-square close to 1 is a indicative factor of a good fit.

4. The root mean square error (RMSE) is also a fit standard error and it can be calculated from:

$$\text{RMSE} = \sqrt{\text{MSE}},$$

where,

$$\text{MSE} = \frac{\text{SSE}}{v}.$$

6.2.3 Experimental Analysis

In order to have a real experimental quantum random number generator, a setup shown in figure 6.12 was built in the lab. To simulate a single photon source we have a CW-Pump laser with 1550 nm wavelength followed by an interferometer Mach-Zenhder in order to have a pulsed beam. The interferometer has an input signal given by a Pulse Pattern Generator. This device also gives a clock signal for the Single Photon Detector (APD-Avalanche Photodiode) which sets the time during which the window of the detector is open. After the MZM there is a Variable Optical Attenuator (VOA) which reduces the amplitude of each pulse until the probability of one photon per pulse is achieved. Next, there is a polarizer controller followed by a Linear Polarized, which is set at 45° , then a Polarization Beam Splitter (PBS) and finally, one detector at the end of each output of the PBS. The output signals from the detector will be received by a Processing Unit. Regarding to acquired the output of the detectors, there is an oscilloscope capable of record 1×10^6 samples.

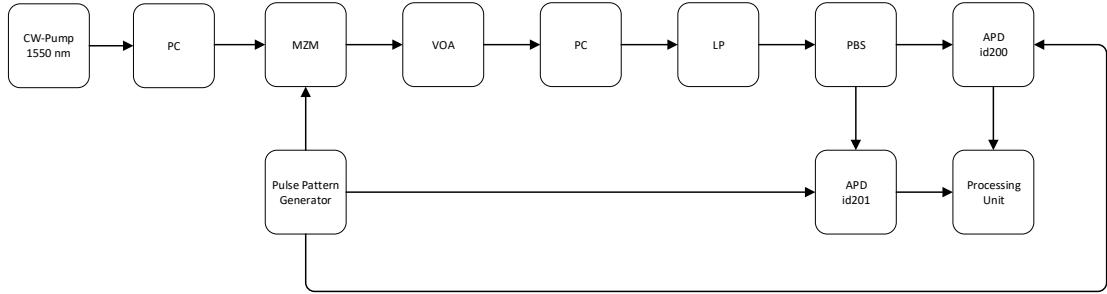


Figure 6.12: Experimental setup to implement a quantum random number generator.

IDQuantique detector

The detector used in the laboratory is the Thorlabs PDB 450C. This detector consists of two well-matched photodiodes and a transimpedance amplifier that generates an output voltage (RF OUTPUT) proportional to the difference between the photocurrents of the photodiodes. Additionally, the unit has two monitor outputs (MONITOR+ and MONITOR-) to observe the optical input power level on each photodiode separately.

Since we do not have a single photon source, we must use the Poisson Statistics in order to calculate the best value for a mean of photons per pulse. A weak laser pulse follows a Poissonian Statistics[3]:

$$S_n = e^{-\mu} \frac{\mu^n}{n!}, \quad (6.12)$$

where μ is the average photon number. In addition, the probability of an optical pulse carries one photon at least is:

$$P = 1 - S_0 = 1 - e^{-\mu}. \quad (6.13)$$

On the other hand, the probability of a detector clicks is:

$$P_{click} = P_{det} + P_{dc} + P_{det}P_{dc}, \quad (6.14)$$

where P_{det} is the probability of the detector clicks due a photon which cross its window and P_{dc} is the probability of dark counts. Considering the detector efficiency η_D , the probability of the detector clicks due to a photon is:

$$P_{det} = 1 - e^{-\eta_D \mu}. \quad (6.15)$$

The probability of dark counts is calculated as a ratio between the frequency counts and the trigger frequency when no laser is connected to the detector. Nevertheless, the detector click frequency is

$$f_{click} = f_{trigger} P_{click} \longrightarrow P_{click} = \frac{f_{click}}{f_{trigger}}. \quad (6.16)$$

This way the mean average photon number can be calculate using the following equation:

$$\mu = -\frac{1}{\eta_D} \ln \left[1 - \frac{1}{1 - P_{dc}} \left(\frac{f_{click}}{f_{trigger}} - P_{dc} \right) \right] \quad (6.17)$$

6.2.4 Open Issues

- Experimental Implementation.
- Random number validation/standardization.

References

- [1] GE Katsoprinakis et al. "Quantum random number generator based on spin noise". In: *Physical Review A* 77.5 (2008), p. 054101.
- [2] Thomas Jennewein et al. "A fast and compact quantum random number generator". In: *Review of Scientific Instruments* 71.4 (2000), pp. 1675–1680. DOI: [10.1063/1.1150518](https://doi.org/10.1063/1.1150518).
- [3] Mark Fox. *Quantum Optics, an Introduction*. Oxford, University Press, 2006.

6.3 Classical Multi-Party Computation

6.3.1 Introduction

Multi-Party Computation (MPC), also known as Secure Function Evaluation, allows two or more parties to correctly compute a function of their private inputs without exposure, i.e., without the input of one party being revealed to the other parties. In other terms, a generic function f receives as input a set $\{a_1, a_2, \dots, a_n\}$ of arguments, where a_i is the input of the i -th party, and $1 \leq i \leq n$, and outputs a value c , which represents the result of the joint computation of f , as shown in Figure 6.13. The output of f is given by the following expression.

$$c = f(a_1, a_2, \dots, a_n) \quad (6.18)$$

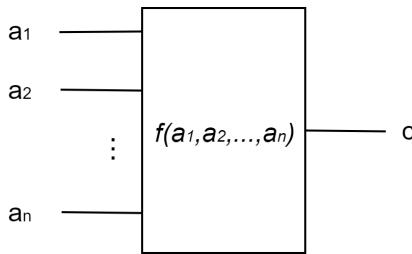


Figure 6.13: Multi-Party Computation Diagram

There are two main models in the literature for the analysis of the Multi-Party Computation problems. The ideal model, which consists in using a Trusted Third Party (TTP). The parties provide their input to the TTP, who will perform the computation of the function. The result is then sent to all the parties. This paradigm relies on the trustworthiness of the TTP because if it turns corrupt, it can supply the private input of one party to the others. This model is extensively used due to its easy implementation and protocols available which prevent the TTP from acting maliciously. The real model of MPC does not use a TTP. In this model, the parties agree on some protocol which will allow them to jointly compute the function. Different protocols are needed for different MPC models and different party behavior models. In 6.3.4 we will be analyzing different solutions to known MPC problems.

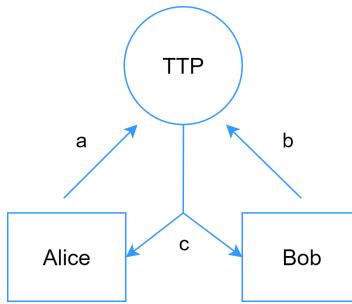


Figure 6.14: MPC using a Third Trusted Party

6.3.2 Two-Party Computation

Two-Party Computation (2PC) is a specific case of MPC, where a generic function f receives as input a set $\{a, b\}$ of arguments, where a is the input from the first party and b is the input from the second, and outputs a value c , as shown in Figure 6.15. The output of f is given by the following expression.

$$c = f(a, b) \quad (6.19)$$

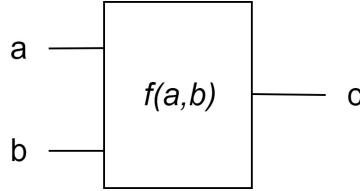


Figure 6.15: Two-Party Computation Diagram

6.3.3 Party Behavior Models

There are three main models to describe the behavior of a party. The honest model, where the party follows the protocol and respects the privacy of other parties. A semi honest model, where the party follows the protocol but also tries to gain additional information other than the result. The corrupt model, where the party neither follows the protocol nor respects the privacy of other parties.

6.3.4 MPC Problems and Solutions

In this subsection, we will be analyzing different solutions to known MPC problems without the presence of a TTP. We will present a problem and then analyze various solution.

The Millionaires' Problem

Consider 2 parties, Alice and Bob, with inputs a and b respectively. The output of this function is 1 when $a < b$ and 0 when $a \geq b$. In other terms,

$$f(a, b) = \begin{cases} 0, & \text{if } a \geq b \\ 1, & \text{if } a < b \end{cases}$$

Yao's Solution This method was proposed by Andrew C. Yao in 1982 [1]. Let E_a be Alice's public key, $E_a(x)$ the process of encrypting input x by performing a bitwise XOR between x and Alice's public key and $D_a(x)$ the process of decrypting input x . For this example, we will assume the following values: $a = 7$, $b = 3$, $N = 16$, $x = 39226$, $p = 211$ and $E_a = 24698$.

1. Bob picks a random N -bit integer, x , and computes privately the value of $E_a(x)$; calls the result k .

$$k = E_a(x) = x \oplus E_a = 63808 \quad (6.20)$$

2. Bob sends Alice the number $k - b + 1$

$$k - b + 1 = 63806 \quad (6.21)$$

3. Alice computes privately the values of $Y_u = D_a(k - b + u)$ for $u = 1, 2, \dots, 10$

$$Y_u = [39236, 39237, 39226, 39227, 39224, 39225, 39230, 39231, 39228, 39229]$$

4. Alice generates a random prime p of $N/2$ bits, and computes $Z_u = Y_u \bmod p$

$$Z_u = [201, 202, 191, 192, 189, 190, 195, 196, 193, 194]$$

5. Alice sends the prime p and the following 10 numbers to Bob: Z_1, Z_2, \dots, Z_a followed by $Z_{a+1} + 1, \dots, Z_{10} + 1$

$$M = [201, 202, 191, 192, 189, 190, 195, 197, 194, 195]$$

Note that only the elements of Z_u and M with indexes 7, 8, 9 and 10 are different, since $a = 7$

6. Bob looks at the b -th number sent by Alice, and decides that $a \geq b$ if it is equal to $x \bmod p$, and $a < b$ otherwise. In other terms,

$$f(a, b) = \begin{cases} 0, & \text{if } M_b = x \bmod p \\ 1, & \text{if } M_b \neq x \bmod p \end{cases}$$

Since $M_b = x \bmod p = 191$, we have $f(a, b) = 0$, which means that $a \geq b$.

1-2 Oblivious Transfer

Consider 2 parties, Alice and Bob. Alice has a set of messages $A = \{m_0, m_1, m_2, \dots, m_{n-1}\}$ and Bob has an index b . The output of this function should be m_b , i.e., the message from Alice's set of index b . Bob should not gain any more information other than m_b and Alice should not know the value of b .

$$f(A, b) = A_b \quad (6.22)$$

««««< HEAD

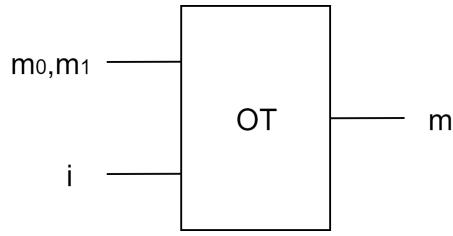


Figure 6.16: Oblivious Transfer Diagram

Average Value

Consider 2 parties, Alice and Bob, with inputs a and b respectively. The output of this function should be the average value of a and b . In other terms,

$$f(a, b) = \frac{a + b}{2} \quad (6.23)$$

=====

Average Value

»»»> Goncalo

6.3.5 Garbled Circuit Protocol

Introduced in 1986 by Andrew Yao, the Garbled Circuit protocol (GC) addresses the case of Two-Party Computation (2PC), without the presence of a trusted third party. GC allows a secure evaluation of a function given as a Boolean circuit that is represented as a series of logic gates. The circuit is known to both parties.

6.3.6 Hardware Description Languages

Contrary to Programming Languages such as C or C++, which are used to specify a set of instructions to a computer, Hardware Description Languages (HDL) are computer languages used to describe the structure and behavior of digital logic circuits. They allow for the synthesis of HDL description code into a netlist (specification of physical electronic components, such as AND gates or NOT gates, and how they are connected together).

6.3.7 TinyGarble

TinyGarble is a GC framework that takes advantage of powerful logic synthesis techniques, provided by both HDL synthesis tools and TinyGarble's custom libraries, in order to improve the overall efficiency of the GC protocol. It is possible to describe the circuit using High-Level Programming Languages (HLPL) such as C, although High-Level Synthesis (HLS) is required. HLS is performed by High-Level Synthesis tools, such as SPARK for the C language.

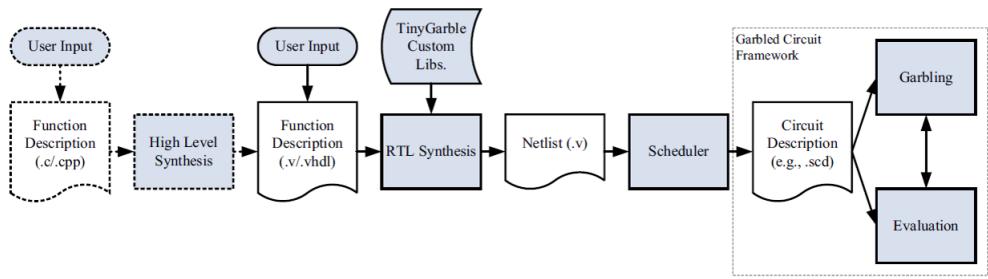


Figure 6.17: TinyGarble Flow Diagram

6.3.8 ARM2GC

Although circuit description in HLPL is possible, it is not very efficient when compared to HDL circuit description. ARM2GC addresses this problem, significantly improving the performance of garbled circuits described in HLPL.

In the case of 2PC, ARM2GC's approach to GC is based on the ARM processor architecture and consists in providing a public parameter to function f , so that its output would be given by the following expression.

$$z = f(a, b, p) \quad (6.24)$$

, where p represents a public parameter, known to both parties.

In ARM2GC the Boolean circuit required to perform GC is that of a processor to which the compiled binary of the function is given as a public input ($p = \text{compiled binary of the function}$). This optimization is performed by the SkipGate algorithm.

References

- [1] Andrew C. Yao. "Protocols for Secure Computations". In: - (1982).

6.4 Quantum Multi-Party Computation

6.4.1 Our Approach

1 out of 2 Oblivious Transfer

This section will provide the description of a 1-2 Oblivious Transfer (OT) based on the appliance of a Quantum Oblivious Key Distribution Protocol (QOKD). The 1-2 OT consists in a two party, Alice and Bob, communication protocol. Supposing that Alice has two messages $\{m_1, m_0\}$ length s , Bob wants to know one of those in such a way that:

- Alice doesn't know Bob's choice, i.e. the protocol is oblivious;
- Bob doesn't get any information on the message he didn't choose, i.e. the protocol is concealing.

Considering the notation of a canonical quantum oblivious transfer protocol, let $U = \{+, \times\}^n \times \{0, 1\}^n$, where $+, \times$ stand for the rectilinear and diagonal bases, with a correspondence previously agreed by both Bob and Alice. Physically this corresponds to the general algorithm of the protocol can be described as:

- Step 1:
Alice picks a random uniformly chosen $(a, g) \in U$, and sends Bob photons $i, 1 \leq i \leq n$ with polarizations given by the bases $a[i]$ and states $g[i]$.
- Step 2:
Bob picks a random uniformly chosen $b \in \{+, \times\}^n$, measures photons i in basis $b[i]$ and records the results, if a photon is detected, as $h[i] \in \{0, 1\}$. Bob then makes a bit commitment of all n pairs $(b[i], h[i])$ to Alice.
- Step 3:
Alice picks a random uniformly chosen subset $R \subset \{1, 2, \dots, n\}$ and tests the commitment made by Bob at positions in R . If more δn (acceptance threshold) positions $i \in R$ reveal $a[i] = b[i]$ and $g[i] \neq h[i]$ then Alice stops protocol; otherwise, the test result is accepted.
- Step 4:
Alice announces the base a . Let T_0 be the set of $1 \leq i \leq n$ such that $a[i] = b[i]$ and let T_1 be the set of all $1 \leq i \leq n$ such that $a[i] \neq b[i]$. Bob chooses $I_0, I_1 \subset T_0 - R, T_1 - R$ and sends $S_i = \{I_{1-i}, I_i\}$, wishing to know $m_i, i \in \{0, 1\}$.
- Step 5:
Alice defines two encryption keys K_0, K_1 in such a way that $K_i = g[I_i]$ for $i = 0 \vee i = 1$. Alice then cyphers both messages: $m_{\text{coded}} = \{m_0 \oplus K_0, m_1 \oplus K_1\}$ and sends the result m to Bob.
- Step 6:
Bob will then decode m using the values of his initially chosen basis: $b[S_i]$ with $i \in$

$\{0, 1\}$, according to his preference. $m_{\text{decoded}} = m_{\text{coded}} \oplus b [S_i]$. The output of this process will be m_{decoded} that will have the correct message in the first or last s^{th} positions if he chose m_0 or m_1 , respectively.

It is intuitively clear that the above protocol performs correctly if both parties are honest [1]. The security of protocol depends, though on the honesty of both parties (and a potential eavesdropper) involved. The security of the protocol can be evaluated in terms of the amount of information received by any given participant. In order to formalize and proof the security of such a system for any case though one has to think of the proceedings of a hypothetically dishonest Bob and an eventual eavesdropper Eve.

- Step 1:
Dishonest Bob has no advantage in being dishonest at this point.
- Step 2:
Dishonest Eve transfers some information from this pulse into her quantum system and she uses that information to modify the residual state of the pulse which is sent to Bob.
Dishonest Bob executes a coherent measurement on the pulse received in order to determine: whether or not he declares this pulse as detected and the bit that he commits to Alice.
- Step 4:
Having learnt Alice's string of basis a dishonest Bob executes a first post-measurement of his choice and uses the outcome to compute the ordered pair S .
- Step 5:
Using the information obtained in the previous step dishonest Bob makes a second post-test measurement and obtains the outcome \mathcal{J}_{Bob} . Eve measures her system and obtains the outcome \mathcal{J}_{Eve} [2].

From [2] one can concluded that a dishonest Bob following these proceedings learns nothing about m , the set of both original messages concatenated, in its full extended, either he passes or fails Alice's original verification. This protocol also compensates the errors in the quantum channel. It is also stated that security against Bob and tolerance against errors implies the security of the protocol against Eve [2].

Comparison Protocol

The millionaire problem was originally a two-party secure computation problem, in which two millionaires, Alice and Bob, want to know which of them is richer without revealing their actual wealth. It is analogous to a more general problem whose goal is to compare two numbers a and b , without revealing any extra information on their values other than what can be inferred from the comparison result. Boudot proposed a protocol to solve said. However, Lo pointed out that the equality function cannot be securely evaluated with a two-party scenario. Therefore, some additional assumptions should be considered to reach the goal of private comparison, a quantum comparison protocol (QPC) always needs:

- An at least semi-honest Third Party (TP) is required to help the two parties (Alice and Bob) accomplish the comparison. A semi-honest TP is a party who always follows the procedure of the protocol recording all of intermediate computations and despite not being corrupted by an outside eavesdropper, TP might try to steal the information from the record. TP will know the positions of different bit value in the compared information, but it will not be able to know the actual bit value of the information.
- All outsiders and the two players should only know the result of the comparison, but not the different positions of the information.
- To guarantee the security of private information, it is better to compare several bits instead of one bit at a time.

Since Yao's initial proposal, several QKD protocols using Einsteinâ€“Podolskyâ€“Rosen (EPR) pairs have been proposed in previous work to achieve secret communication for two communicants. These QKD protocols attempt to use the correlation of EPR pairs to distribute a common shared key for two mutually trusted users. However, EPR pairs in the proposed QPC protocol are used to create two individual keys for each of two mutually suspicious users and at the same time allow a semi-honest third party to perform the comparison without knowing the secret content of their information. Therefore, a QKD protocol may not be able to directly solve the QPC problem.

References

- [1] Andrew Chi-Chih Yao. "Security of quantum protocols against coherent measurements". In: *Proceedings of the twenty-seventh annual ACM symposium on Theory of computing - STOC '95*. ACM Press, 1995. DOI: [10.1145/225058.225085](https://doi.org/10.1145/225058.225085). URL: <https://doi.org/10.1145/225058.225085>.
- [2] Dominic Mayers. "On the Security of the Quantum Oblivious Transfer and Key Distribution Protocols". In: *Proceedings of the 15th Annual International Cryptology Conference on Advances in Cryptology*. CRYPTO '95. London, UK, UK: Springer-Verlag, 1995, pp. 124–135. ISBN: 3-540-60221-6. URL: <http://dl.acm.org/citation.cfm?id=646760.705993>.

7.1 Add

Header File	:	add.h
Source File	:	add.cpp
Version	:	20180118

Input Parameters

This block takes no parameters.

Functional Description

This block accepts two signals and outputs one signal built from a sum of the two inputs. The input and output signals must be of the same type, if this is not the case the block returns an error.

Input Signals

Number: 2

Type: Real, Complex or Complex_XY signal (ContinuousTimeContinuousAmplitude)

Output Signals

Number: 1

Type: Real, Complex or Complex_XY signal (ContinuousTimeContinuousAmplitude)

7.2 Alice QKD

This block is the processor for Alice does all tasks that she needs. This block accepts binary, messages, and real continuous time signals. It produces messages, binary and real discrete time signals.

Input Parameters

- double RateOfPhotons{1e3}
- int StringPhotonsLength{ 12 }

Methods

```
AliceQKD (vector <Signal*> &inputSignals, vector <Signal*> &outputSignals) :  
Block(inputSignals, outputSignals) {};  
void initialize(void);  
bool runBlock(void);  
void setRateOfPhotons(double RPhotons) { RateOfPhotons = RPhotons; }; double const  
getRateOfPhotons(void) { return RateOfPhotons; };  
void setStringPhotonsLength(int pLength) { StringPhotonsLength = pLength; }; int const  
getStringPhotonsLength(void) { return StringPhotonsLength; };
```

Functional description

This block receives a sequence of binary numbers (1's or 0's) and a clock signal which will set the rate of the signals produced to generate single polarized photons. The real discrete time signal **SA_1** is generated based on the clock signal and the real discrete time signal **SA_2** is generated based on the random sequence of bits received through the signal **NUM_A**. This last sequence is analysed by the polarizer in pairs of bits in which each pair has a bit for basis choice and other for direction choice.

This block also produces classical messages signals to send to Bob as well as binary messages to the mutual information block with information about the photons it sent.

Input Signals

Number : 3

Type : Binary, Real Continuous Time and Messages signals.

Output Signals

Number : 3

Type : Binary, Real Discrete Time and Messages signals.

Examples

Sugestions for future improvement

7.3 Balanced Beam Splitter

Header File	:	balanced_beam_splitter.h
Source File	:	balanced_beam_splitter.cpp
Version	:	20180124

Input Parameters

Name	Type	Default Value
Matrix	array <t_complex, 4>	$\left\{ \left\{ \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}, \frac{1}{\sqrt{2}}, \frac{-1}{\sqrt{2}} \right\} \right\}$
Mode	double	0

Functional Description

The structure of the beam splitter can be controlled with the parameter mode.

When **Mode = 0** the beam splitter will have one input port and two output ports - **1x2 Beam Splitter**. If Mode has a value different than 0, the splitter will have two input ports and two output ports - **2x2 Beam Splitter**.

Considering the first case, the matrix representing a 2x2 Beam Splitter can be summarized in the following way,

$$M_{BS} = \frac{\sqrt{2}}{2} \begin{bmatrix} 1 & 1 \\ 1 & -1 \end{bmatrix} \quad (7.1)$$

The relation between the values of the input ports and the values of the output ports can be established in the following way

$$\begin{bmatrix} A' \\ B' \end{bmatrix} = M_{BS} \begin{bmatrix} A \\ B \end{bmatrix} \quad (7.2)$$

Where, A and B represent the inputs and A' and B' represent the outputs of the Beam Splitter.

Input Signals

Number: 1 or 2

Type: Complex

Output Signals

Number: 2

Type: Complex

7.4 Bit Error Rate

Header File	:	bit_error_rate.h
Source File	:	bit_error_rate.cpp
Version	:	20171810 (Responsible: Daniel Pereira)

Input Parameters

Name	Type	Default Value
Confidence	double	0.95
MidReportSize	integer	0
LowestMinorant	double	1×10^{-10}

Input Signals

Number: 2

Type: Binary (DiscreteTimeDiscreteAmplitude)

Output Signals

Number: 1

Type: Binary (DiscreteTimeDiscreteAmplitude)

Functional Description

This block accepts two binary strings and outputs a binary string, outputting a 1 if the two input samples are equal to each other and 0 if not. This block also outputs *.txt* files with a report of the estimated Bit Error Rate (BER), $\widehat{\text{BER}}$ as well as the estimated confidence bounds for a given probability α .

The block allows for mid-reports to be generated, the number of bits between reports is customizable, if it is set to 0 then the block will only output the final report.

Theoretical Description

The $\widehat{\text{BER}}$ is obtained by counting both the total number received bits, N_T , and the number of coincidences, K , and calculating their relative ratio:

$$\widehat{\text{BER}} = 1 - \frac{K}{N_T}. \quad (7.3)$$

The upper and lower bounds, BER_{UB} and BER_{LB} respectively, are calculated using the Clopper-Pearson confidence interval, which returns the following simplified expression for

$N_T > 40$ [**almeida2016continuous**]:

$$\text{BER}_{\text{UB}} = \widehat{\text{BER}} + \frac{1}{\sqrt{N_T}} z_{\alpha/2} \sqrt{\widehat{\text{BER}}(1 - \widehat{\text{BER}})} + \frac{1}{3N_T} \left[2 \left(\frac{1}{2} - \widehat{\text{BER}} \right) z_{\alpha/2}^2 + (2 - \widehat{\text{BER}}) \right] \quad (7.4)$$

$$\text{BER}_{\text{LB}} = \widehat{\text{BER}} - \frac{1}{\sqrt{N_T}} z_{\alpha/2} \sqrt{\widehat{\text{BER}}(1 - \widehat{\text{BER}})} + \frac{1}{3N_T} \left[2 \left(\frac{1}{2} - \widehat{\text{BER}} \right) z_{\alpha/2}^2 - (1 + \widehat{\text{BER}}) \right], \quad (7.5)$$

where $z_{\alpha/2}$ is the $100 \left(1 - \frac{\alpha}{2}\right)$ th percentile of a standard normal distribution.

7.5 Binary Source

Header File	:	binary_source.h
Source File	:	binary_source.cpp

This block generates a sequence of binary values (1 or 0) and it can work in four different modes:

- 1. Random
- 3. DeterministicCyclic
- 2. PseudoRandom
- 4. DeterministicAppendZeros

This blocks doesn't accept any input signal. It produces any number of output signals.

Input Parameters

Parameter	Type	Values	Default
mode	string	Random, PseudoRandom, DeterministicCyclic, DeterministicAppendZeros	PseudoRandom
probabilityOfZero	real	$\in [0,1]$	0.5
patternLength	int	Any natural number	7
bitStream	string	sequence of 0's and 1's	0100011101010101
numberOfBits	long int	any	-1
bitPeriod	double	any	1.0/100e9

Table 7.1: Binary source input parameters

Methods

```
BinarySource(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig){};
```

```
void initialize(void);
bool runBlock(void);
void setMode(BinarySourceMode m) BinarySourceMode const getMode(void)
void setProbabilityOfZero(double pZero)
double const getProbabilityOfZero(void)
void setBitStream(string bStream)
```

```

string const getBitStream(void)

void setNumberOfBits(long int nOfBits)

long int const getNumberOfBits(void)

void setPatternLength(int pLength)

int const getPatternLength(void)

void setBitPeriod(double bPeriod)

double const getBitPeriod(void)

```

Functional description

The *mode* parameter allows the user to select between one of the four operation modes of the binary source.

Random Mode Generates a 0 with probability *probabilityOfZero* and a 1 with probability $1 - \text{probabilityOfZero}$.

Pseudorandom Mode Generates a pseudorandom sequence with period $2^{\text{patternLength}} - 1$.

DeterministicCyclic Mode Generates the sequence of 0's and 1's specified by *bitStream* and then repeats it.

DeterministicAppendZeros Mode Generates the sequence of 0's and 1's specified by *bitStream* and then it fills the rest of the buffer space with zeros.

Input Signals

Number: 0

Type: Binary (DiscreteTimeDiscreteAmplitude)

Output Signals

Number: 1 or more

Type: Binary (DiscreteTimeDiscreteAmplitude)

Examples

Random Mode

PseudoRandom Mode As an example consider a pseudorandom sequence with *patternLength*=3 which contains a total of 7 ($2^3 - 1$) bits. In this sequence it is possible to find every combination of 0's and 1's that compose a 3 bit long subsequence with the exception of 000. For this example the possible subsequences are 010, 110, 101, 100, 111, 001 and 100 (they appear in figure 7.1 numbered in this order). Some of these require wrap.

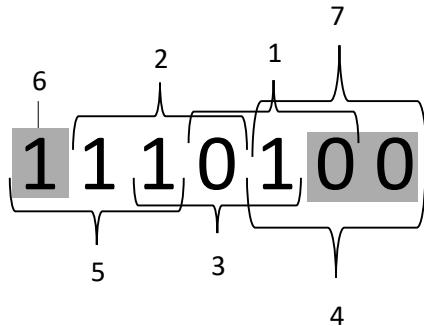


Figure 7.1: Example of a pseudorandom sequence with a pattern length equal to 3.

DeterministicCyclic Mode As an example take the *bit stream* '0100011101010101'. The generated binary signal is displayed in.

DeterministicAppendZeros Mode Take as an example the *bit stream* '0100011101010101'. The generated binary signal is displayed in 7.2.

Sugestions for future improvement

Implement an input signal that can work as trigger.

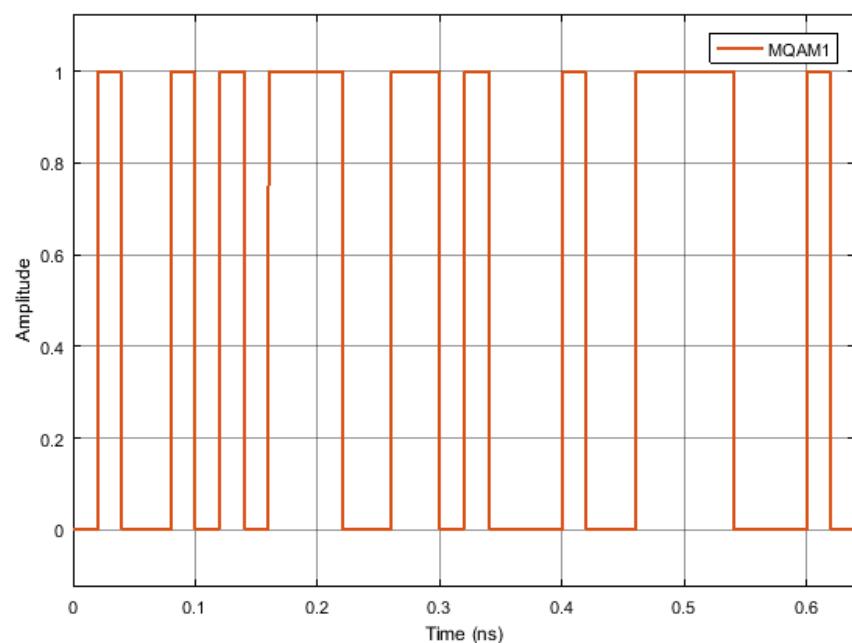


Figure 7.2: Binary signal generated by the block operating in the *Deterministic Append Zeros* mode with a binary sequence 01000...

7.6 Bob QKD

This block is the processor for Bob does all tasks that she needs. This block accepts and produces:

1.

2.

Input Parameters

-
-

Methods

Functional description

Input Signals

Examples

Sugestions for future improvement

7.7 Bit Decider

Header File	:	bit_decider.h
Source File	:	bit_decider.cpp
Version	:	20170818

Input Parameters

Name	Type	Default Value
decisionLevel	double	0.0

Functional Description

This block accepts one real discrete signal and outputs a binary string, outputting a 1 if the input sample is greater than the decision level and 0 if it is less or equal to the decision level.

Input Signals

Number: 1

Type: Real signal (DiscreteTimeContinuousAmplitude)

Output Signals

Number: 1

Type: Binary (DiscreteTimeDiscreteAmplitude)

7.8 Clock

Header File	:	clock.h
Source File	:	clock.cpp

This block doesn't accept any input signal. It outputs one signal that corresponds to a sequence of Dirac's delta functions with a user defined *period*.

Input Parameters

Parameter	Type	Values	Default
period	double	any	0.0
samplingPeriod	double	any	0.0

Table 7.2: Binary source input parameters

Methods

Clock()

```
Clock(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig,
OutputSig)
```

```
void initialize(void)
```

```
bool runBlock(void)
```

```
void setClockPeriod(double per)
```

```
void setSamplingPeriod(double sPeriod)
```

Functional description

Input Signals**Number:** 0**Output Signals****Number:** 1

Type: Sequence of Dirac's delta functions.
(TimeContinuousAmplitudeContinuousReal)

Examples**Sugestions for future improvement**

7.9 Clock_20171219

This block doesn't accept any input signal. It outputs one signal that corresponds to a sequence of Dirac's delta functions with a user defined *period*, *phase* and *sampling period*.

Input Parameters

- period{ 0.0 };
- samplingPeriod{ 0.0 };
- phase {0.0};

Methods

Clock()

```
Clock(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig,
OutputSig)

void initialize(void)

bool runBlock(void)

void setClockPeriod(double per) double getClockPeriod()

void setClockPhase(double pha) double getClockPhase()

void setSamplingPeriod(double sPeriod) double getSamplingPeriod()
```

Functional description

Input Signals

Number: 0

Output Signals

Number: 1

Type: Sequence of Dirac's delta functions.
(TimeContinuousAmplitudeContinuousReal)

Examples

Sugestions for future improvement

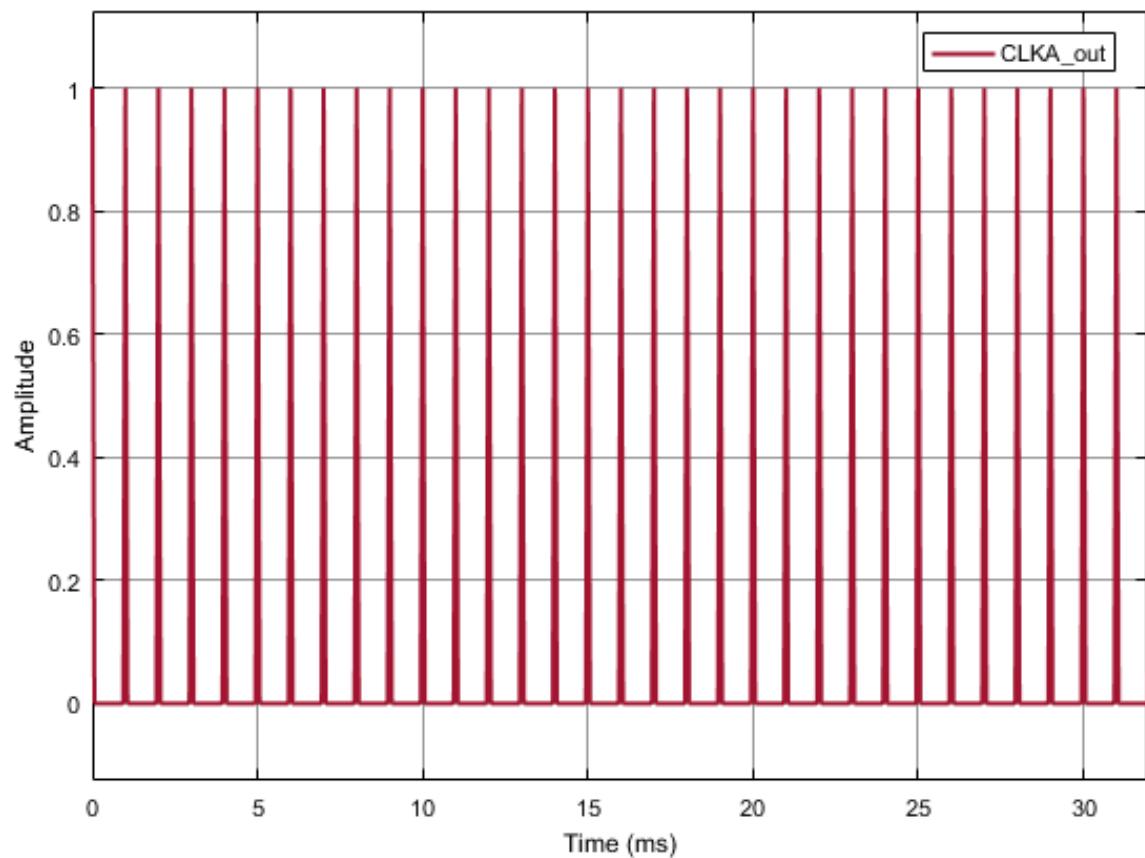


Figure 7.3: Example of the output signal of the clock without phase shift.

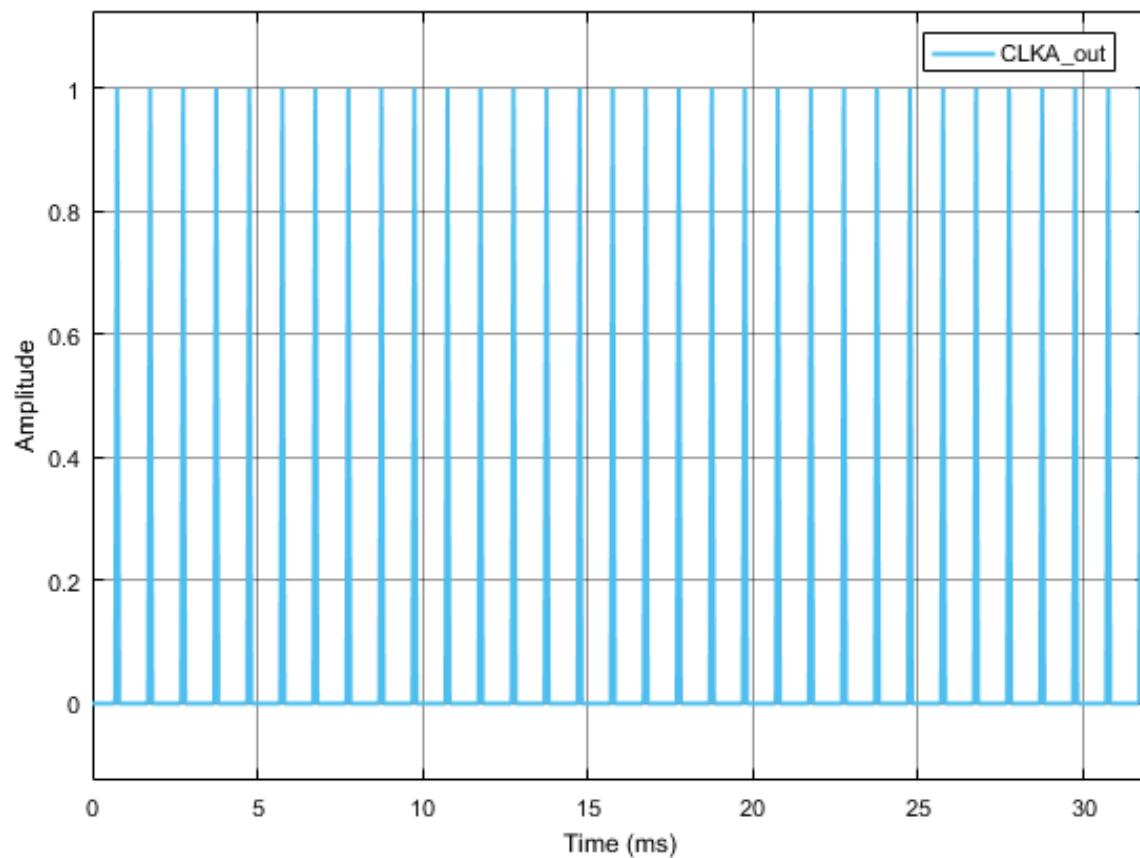


Figure 7.4: Example of the output signal of the clock with phase shift.

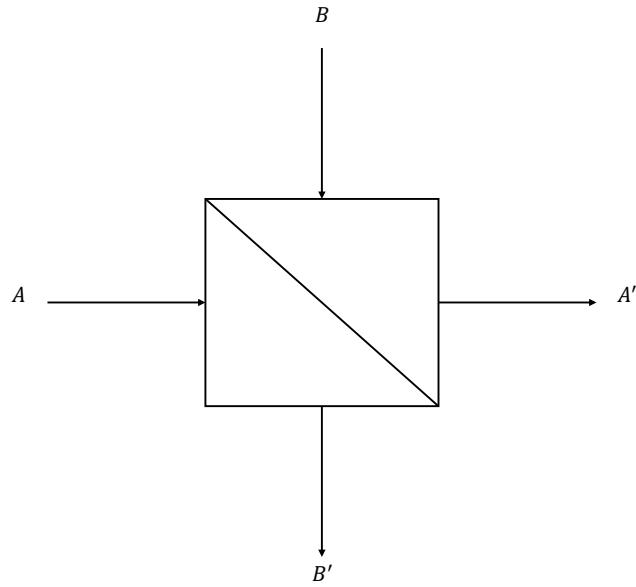


Figure 7.5: 2x2 coupler

7.10 Coupler 2 by 2

In general, the matrix representing 2x2 coupler can be summarized in the following way,

$$\begin{bmatrix} A' \\ B' \end{bmatrix} = \begin{bmatrix} T & iR \\ iR & T \end{bmatrix} \cdot \begin{bmatrix} A \\ B \end{bmatrix} \quad (7.6)$$

Where, A and B represent inputs to the 2x2 coupler and A' and B' represent output of the 2x2 coupler. Parameters T and R represent transmitted and reflected part respectively which can be quantified in the following form,

$$T = \sqrt{1 - \eta_R} \quad (7.7)$$

$$R = \sqrt{\eta_R} \quad (7.8)$$

Where, value of the $\sqrt{\eta_R}$ lies in the range of $0 \leq \sqrt{\eta_R} \leq 1$.

It is worth to mention that if we put $\eta_R = 1/2$ then it leads to a special case of "Balanced Beam splitter" which equally distribute the input power into both output ports.

7.11 Decoder

Header File	:	decoder.h
Source File	:	decoder.cpp

This block accepts a complex electrical signal and outputs a sequence of binary values (0's and 1's). Each point of the input signal corresponds to a pair of bits.

Input Parameters

Parameter	Type	Values	Default
m	int	≥ 4	4
iqAmplitudes	vector<t_complex>	—	{ { 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 } }

Table 7.3: Binary source input parameters

Methods

Decoder()

```
Decoder(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig,
OutputSig)
```

```
void initialize(void)
```

```
bool runBlock(void)
```

```
void setM(int mValue)
```

```
void getM()
```

```
void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues)
```

```
vector<t_iqValues> getIqAmplitudes()
```

Functional description

This block makes the correspondence between a complex electrical signal and pair of binary values using a predetermined constellation.

To do so it computes the distance in the complex plane between each value of the input signal and each value of the *iqAmplitudes* vector selecting only the shortest one. It then converts the point in the IQ plane to a pair of bits making the correspondence between the input signal and a pair of bits.

Input Signals

Number: 1

Type: Electrical complex (TimeContinuousAmplitudeContinuousReal)

Output Signals

Number: 1

Type: Binary

Examples

As an example take an input signal with positive real and imaginary parts. It would correspond to the first point of the *iqAmplitudes* vector and therefore it would be associated to the pair of bits 00.

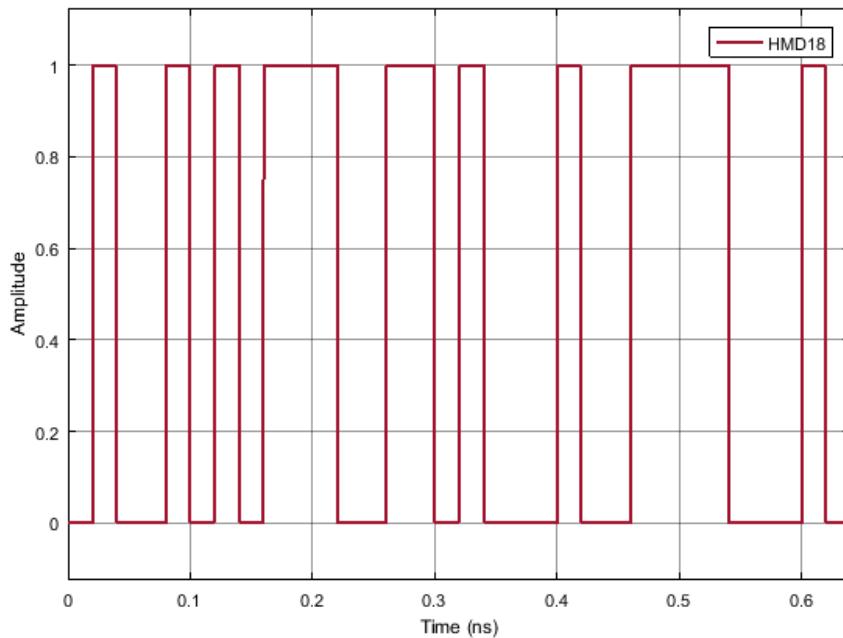


Figure 7.6: Example of the output signal of the decoder for a binary sequence 01. As expected it reproduces the initial bit stream

Sugestions for future improvement

7.12 Discrete To Continuous Time

Header File	:	discrete_to_continuous_time.h
Source File	:	discrete_to_continuous_time.cpp

This block converts a signal discrete in time to a signal continuous in time. It accepts one input signal that is a sequence of 1's and -1's and it produces one output signal that is a sequence of Dirac delta functions.

Input Parameters

Parameter	Type	Values	Default
numberOfSamplesPerSymbol	int	any	8

Table 7.4: Binary source input parameters

Methods

```
DiscreteToContinuousTime(vector<Signal * > &inputSignals, vector<Signal * > &outputSignals) :Block(inputSignals, outputSignals){};

void initialize(void);

bool runBlock(void);

void setNumberOfSamplesPerSymbol(int nSamplesPerSymbol)

int const getNumberOfSamplesPerSymbol(void)
```

Functional Description

This block reads the input signal buffer value, puts it in the output signal buffer and it fills the rest of the space available for that symbol with zeros. The space available in the buffer for each symbol is given by the parameter *numberOfSamplesPerSymbol*.

Input Signals

Number : 1

Type : Sequence of 1's and -1's. (DiscreteTimeDiscreteAmplitude)

Output Signals

Number : 1

Type : Sequence of Dirac delta functions (ContinuousTimeDiscreteAmplitude)

Example

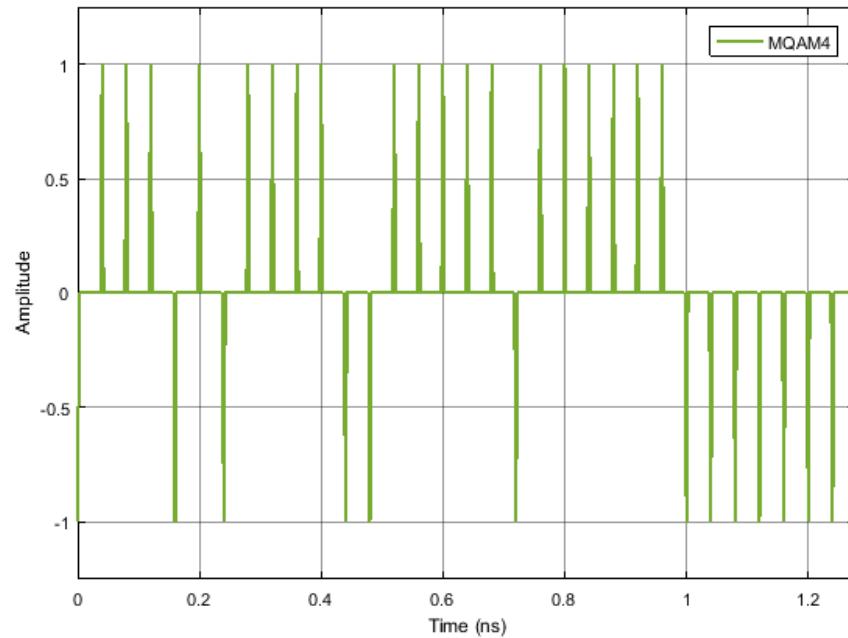


Figure 7.7: Example of the type of signal generated by this block for a binary sequence 0100...

7.13 Electrical Signal Generator

This block generates time continuous amplitude continuous signal, having only one output and no input signal.

7.13.1 ContinuousWave

Continuous Wave the function of the desired signal. This must be introduce by using the function `setFunction(ContinuousWave)`. This function generates a continuous signal with value 1. However, this value can be multiplied by a specific `gain`, which can be set by using the function `setGain()`. This way, this block outputs a continuous signal with value $1 \times \text{gain}$.

Input Parameters

- `ElectricalSignalFunction` `signalFunction`
(`ContinuousWave`)
- `samplingPeriod{}` `(double)`
- `symbolPeriod{}` `(double)`

Methods

```
ElectricalSignalGenerator() {};
void initialize(void);
bool runBlock(void);
void setFunction(ElectricalSignalFunction fun) ElectricalSignalFunction getFunction()
void setSamplingPeriod(double speriod) double getSamplingPeriod()
void setSymbolPeriod(double speriod) double getSymbolPeriod()
void setGain(double gvalue) double getGain()
```

Functional description

The `signalFunction` parameter allows the user to select the signal function that the user wants to output.

Continuous Wave Outputs a time continuous amplitude continuous signal with amplitude 1 multiplied by the gain inserted.

Input Signals

Number: 0

Type: No type

Output Signals

Number: 1

Type: TimeContinuousAmplitudeContinuous

Examples

Sugestions for future improvement

Implement other functions according to the needs.

7.14 Fork

Header File	:	fork_20171119.h
Source File	:	fork_20171119.cpp
Version	:	20171119 (Student Name: Romil Patel)

Input Parameters

— NA —

Input Signals

Number: 1

Type: Any type (BinaryValue, IntegerValue, RealValue, ComplexValue, ComplexValueXY, PhotonValue, PhotonValueMP, Message)

Output Signals

Number: 2

Type: Same as applied to the input.

Number: 3

Type: Same as applied to the input.

Functional Description

This block accepts any type signal and outputs two replicas of the input signal.

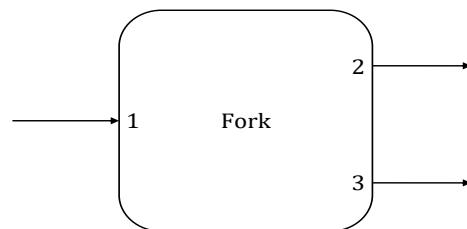


Figure 7.8: Fork

7.15 Gaussian Source

Header File	:	gaussian_source.h
Source File	:	gaussian_source.cpp

This block simulates a random number generator that follows a Gaussian statistics. It produces one output real signal and it doesn't accept input signals.

Input Parameters

Parameter	Type	Values	Default
mean	double	any	0
Variance	double	any	1

Table 7.5: Gaussian source input parameters

Methods

GaussianSource()

```
GaussianSource(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig){};

void initialize(void);

bool runBlock(void);

void setAverage(double Average);
```

Functional description

This block generates a complex signal with a specified phase given by the input parameter *phase*.

Input Signals

Number: 0

Output Signals

Number: 1

Type: Continuous signal (TimeDiscreteAmplitudeContinuousReal)

Examples

Sugestions for future improvement

7.16 MQAM Receiver

Header File	:	m_qam_receiver.h
Source File	:	m_qam_receiver.cpp

Warning: *homodyne_receiver* is not recommended. Use *m_qam_homodyne_receiver* instead.

This block of code simulates the reception and demodulation of an optical signal (which is the input signal of the system) outputing a binary signal. A simplified schematic representation of this block is shown in figure 7.9.




Figure 7.9: Basic configuration of the MQAM receiver

Functional description

This block accepts one optical input signal and outputs one binary signal that corresponds to the M-QAM demodulation of the input signal. It is a complex block (as it can be seen from figure 7.10) of code made up of several simpler blocks whose description can be found in the *lib* repository.

It can also be seen from figure 7.10 that there's an extra internal (generated inside the homodyne receiver block) input signal generated by the *Clock*. This block is used to provide the sampling frequency to the *Sampler*.

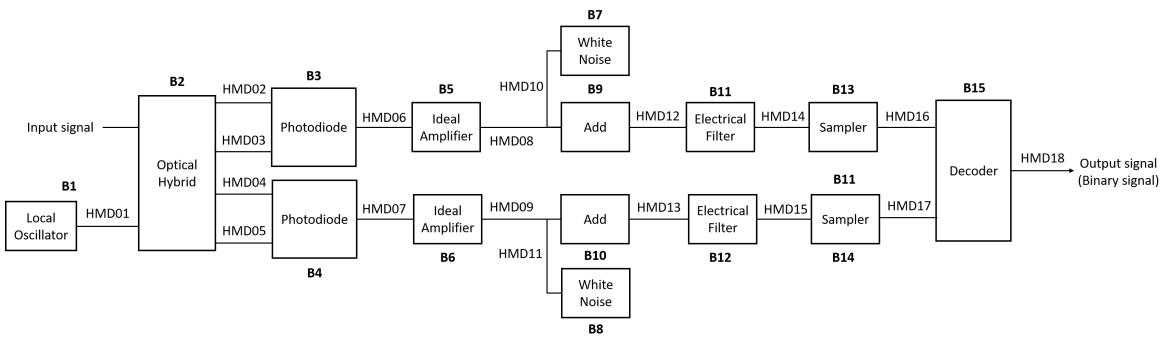


Figure 7.10: Schematic representation of the block homodyne receiver.

Input parameters

This block has some input parameters that can be manipulated by the user in order to change the basic configuration of the receiver. Each parameter has associated a function that allows for its change. In the following table (table 7.19) the input parameters and corresponding functions are summarized.

Input parameters	Function	Type	Accepted values
IQ amplitudes	setIqAmplitudes	Vector of coordinate points in the I-Q plane	Example for a 4-QAM mapping: { { 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 } }
Local oscillator power (in dBm)	setLocalOscillatorOpticalPower_dBm	double(t_real)	Any double greater than zero
Local oscillator phase	setLocalOscillatorPhase	double(t_real)	Any double greater than zero
Responsivity of the photodiodes	setResponsivity	double(t_real)	$\in [0,1]$
Amplification (of the TI amplifier)	setAmplification	double(t_real)	Positive real number
Noise amplitude (introduced by the TI amplifier)	setNoiseAmplitude	double(t_real)	Real number greater than zero
Samples to skip	setSamplesToSkip	int(t_integer)	
Save internal signals	setSaveInternalSignals	bool	True or False
Sampling period	setSamplingPeriod	double	Given by $symbolPeriod / samplesPerSymbol$

Table 7.6: List of input parameters of the block MQAM receiver

Methods

HomodyneReceiver(vector<Signal *> &inputSignal, vector<Signal *> &outputSignal)
(constructor)

```
void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues)
vector<t_iqValues> const getIqAmplitudes(void)
void setLocalOscillatorSamplingPeriod(double sPeriod)
void setLocalOscillatorOpticalPower(double opticalPower)
void setLocalOscillatorOpticalPower_dBm(double opticalPower_dBm)
void setLocalOscillatorPhase(double lOscillatorPhase)
void setLocalOscillatorOpticalWavelength(double lOscillatorWavelength)
void setSamplingPeriod(double sPeriod)
void setResponsivity(t_real Responsivity)
void setAmplification(t_real Amplification)
void setNoiseAmplitude(t_real NoiseAmplitude)
void setImpulseResponseTimeLength(int impResponseTimeLength)
void setFilterType(PulseShaperFilter fType)
void setRollOffFactor(double rOffFactor)
void setClockPeriod(double per)
void setSamplesToSkip(int sToSkip)
```

Input Signals

Number: 1

Type: Optical signal

Output Signals

Number: 1

Type: Binary signal

Example

Sugestions for future improvement

7.17 Ideal Amplifier

This block has one input signal and one output signal both corresponding to electrical signals. The output signal is a perfect amplification of the input signal.

Input Parameters

Parameter	Type	Values	Default
gain	double	any	1×10^4

Table 7.7: Ideal Amplifier input parameters

Methods

`IdealAmplifier()`

```
IdealAmplifier(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig);

void initialize(void);

bool runBlock(void);

void setGain(double ga) gain = ga;

double getGain() return gain;
```

Functional description

The output signal is the product of the input signal with the parameter *gain*.

Input Signals

Number: 1

Type: Electrical (TimeContinuousAmplitudeContinuousReal)

Output Signals

Number: 1

Type: Electrical (TimeContinuousAmplitudeContinuousReal)

Examples

Sugestions for future improvement

7.18 IQ Modulator

Header File	:	iq_modulator.h
Source File	:	iq_modulator.cpp

This blocks accepts one input signal continuous in both time and amplitude and it can produce either one or two output signals. It generates an optical signal and it can also generate a binary signal.

Input Parameters

Parameter	Type	Values	Default
outputOpticalPower	double	any	$1e - 3$
outputOpticalWavelength	double	any	$1550e - 9$
outputOpticalFrequency	double	any	speed_of_light/outputOpticalWavelength

Table 7.8: Binary source input parameters

Methods

```
IqModulator(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig){};
```

```
void initialize(void);
bool runBlock(void);
void setOutputOpticalPower(double outOpticalPower)
void setOutputOpticalPower_dBm(double outOpticalPower_dBm)
void setOutputOpticalWavelength(double outOpticalWavelength)
void setOutputOpticalFrequency(double outOpticalFrequency)
```

Functional Description

This block takes the two parts of the signal: in phase and in amplitude and it combines them to produce a complex signal that contains information about the amplitude and the phase.

This complex signal is multiplied by $\frac{1}{2}\sqrt{outputOpticalPower}$ in order to reintroduce the information about the energy (or power) of the signal. This signal corresponds to an optical signal and it can be a scalar or have two polarizations along perpendicular axis. It is the signal that is transmitted to the receptor.

The binary signal is sent to the Bit Error Rate (BER) measurement block.

Input Signals

Number : 2

Type : Sequence of impulses modulated by the filter
(ContinuousTimeContiousAmplitude)

Output Signals

Number : 1 or 2

Type : Complex signal (optical) (ContinuousTimeContinuousAmplitude) and binary signal (DiscreteTimeDiscreteAmplitude)

Example

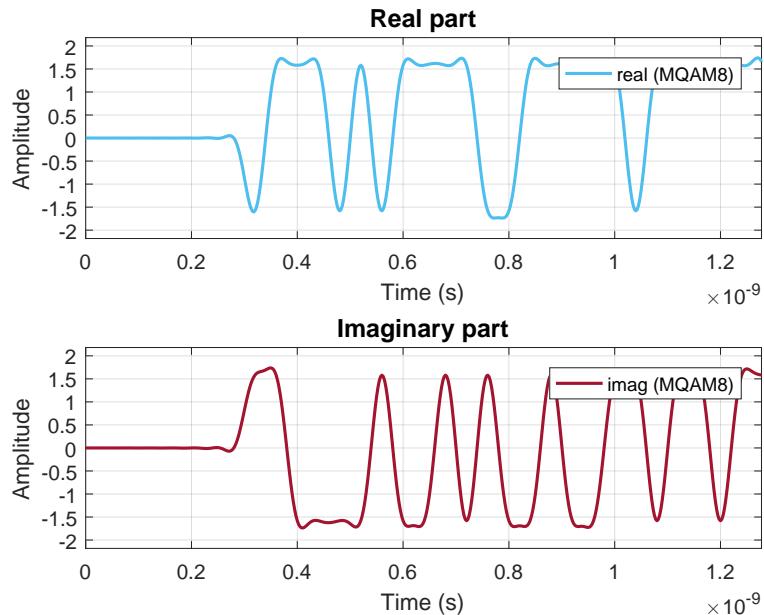


Figure 7.11: Example of a signal generated by this block for the initial binary signal 0100...

7.19 Local Oscillator

Header File	:	local_oscillator.h
Source File	:	local_oscillator.cpp
Version	:	20180130

This block simulates a local oscillator with constant power and initial phase. It produces one output complex signal and it doesn't accept input signals.

Input Parameters

Parameter	Type	Values	Default
opticalPower	double	any	1e - 3
outputOpticalWavelength	double	any	1550e - 9
outputOpticalFrequency	double	any	SPEED_OF_LIGHT / outputOpticalWavelength
phase	double	$\in [0, \frac{\pi}{2}]$	0
samplingPeriod	double	any	0.0
symbolPeriod	double	any	0.0
signaltoNoiseRatio	double	any	0.0
laserLineWidth	double	any	0.0
laserRIN	double	any	0.0

Table 7.9: Binary source input parameters

Methods

LocalOscillator()

```

LocalOscillator(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig){};

void initialize(void);

bool runBlock(void);

void setSamplingPeriod(double sPeriod);

void setSymbolPeriod(double sPeriod);

void setOpticalPower(double oPower);

void setOpticalPower_dBm(double oPower_dBm);

void setWavelength(double wlength);

```

```
void setFrequency(double freq);  
void setPhase(double lOscillatorPhase);  
void setSignaltoNoiseRatio(double sNoiseRatio);  
void setLaserLinewidth(double laserLinewidth);  
void setLaserRIN(double laserRIN);
```

Functional description

This block generates a complex signal with a specified phase given by the input parameter *phase*.

Input Signals

Number: 0

Output Signals

Number: 1

Type: Optical signal

7.20 Local Oscillator

Header File	:	local_oscillator.h
Source File	:	local_oscillator.cpp

This block simulates a local oscillator with constant power and initial phase. It produces one output complex signal and it doesn't accept input signals.

Input Parameters

Parameter	Type	Values	Default
opticalPower	double	any	1e - 3
outputOpticalWavelength	double	any	1550e - 9
outputOpticalFrequency	double	any	SPEED_OF_LIGHT / outputOpticalWavelength
phase0	double	$\in [0, \frac{\pi}{2}]$	0
samplingPeriod	double	any	0.0
laserLW	double	any	0.0
laserRIN	double	any	0.0

Table 7.10: Local oscillator input parameters

Methods

LocalOscillator()

```

LocalOscillator(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig) {};

void initialize(void);

bool runBlock(void);

void setSamplingPeriod(double sPeriod);

void setOpticalPower(double oPower);

void setOpticalPower_dBm(double oPower_dBm);

void setWavelength(double wlength);

void setPhase(double lOscillatorPhase);

void setLaserLinewidth(double laserLinewidth);

```

```
double getLaserLinewidth();  
  
void setLaserRIN(double LOlaserRIN);  
  
double getLaserRIN();
```

Functional description

This block generates a complex signal with a specified initial phase given by the input parameter *phase0*. The phase noise can be simulated by adjusting the laser linewidth in parameter *laserLW*. The relative intensity noise (RIN) can be also adjusting according to the parameter *laserRIN*.

Input Signals

Number: 0

Output Signals

Number: 1

Type: Optical signal

Examples

Sugestions for future improvement

7.21 MQAM Mapper

Header File	:	m_qam_mapper.h
Source File	:	m_qam_mapper.cpp

This block does the mapping of the binary signal using a m -QAM modulation. It accepts one input signal of the binary type and it produces two output signals which are a sequence of 1's and -1's.

Input Parameters

Parameter	Type	Values	Default
m	int	2^n with n integer	4
iqAmplitudes	vector<t_complex>	—	{ { 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 } }

Table 7.11: Binary source input parameters

Methods

```
MQamMapper(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig) {}

void initialize(void);

bool runBlock(void);

void setM(int mValue);

void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues);
```

Functional Description

In the case of $m=4$ this block attributes to each pair of bits a point in the I-Q space. The constellation used is defined by the *iqAmplitudes* vector. The constellation used in this case is illustrated in figure 7.12.

Input Signals

Number : 1

Type : Binary (DiscreteTimeDiscreteAmplitude)

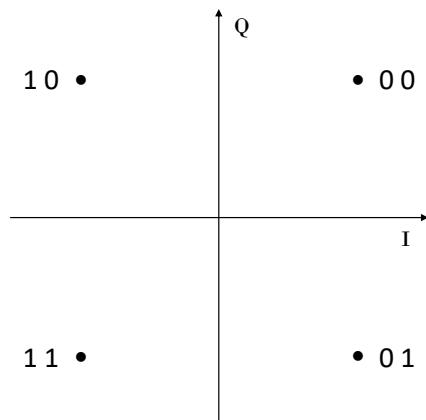


Figure 7.12: Constellation used to map the signal for $m=4$

Output Signals

Number : 2

Type : Sequence of 1's and -1's (DiscreteTimeDiscreteAmplitude)

Example

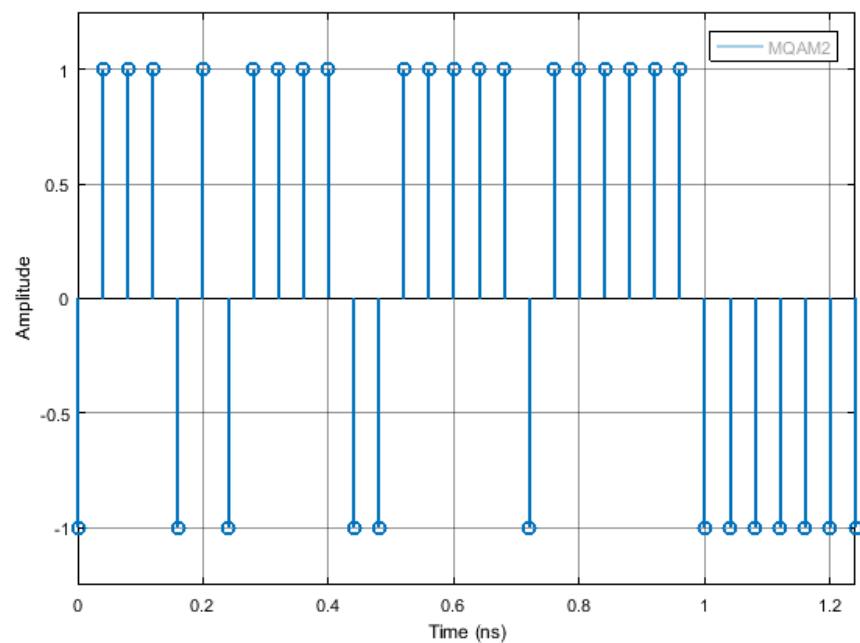


Figure 7.13: Example of the type of signal generated by this block for the initial binary signal 0100...

7.22 MQAM Transmitter

Header File	:	m_qam_transmitter.h
Source File	:	m_qam_transmitter.cpp

This block generates a MQAM optical signal. It can also output the binary sequence. A schematic representation of this block is shown in figure 7.14.




Figure 7.14: Basic configuration of the MQAM transmitter

Functional description

This block generates an optical signal (output signal 1 in figure 7.15). The binary signal generated in the internal block Binary Source (block B1 in figure 7.15) can be used to perform a Bit Error Rate (BER) measurement and in that sense it works as an extra output signal (output signal 2 in figure 7.15).

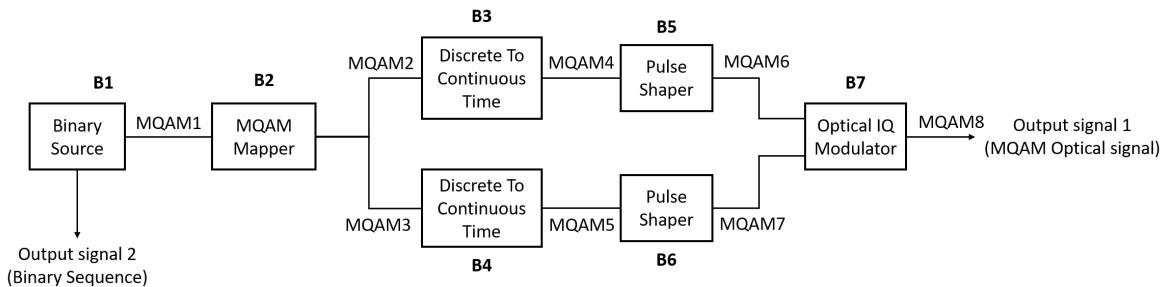


Figure 7.15: Schematic representation of the block MQAM transmitter.

Input parameters

This block has a special set of functions that allow the user to change the basic configuration of the transmitter. The list of input parameters, functions used to change them and the values that each one can take are summarized in table 7.19.

Input parameters	Function	Type	Accepted values
Mode	setMode()	string	PseudoRandom Random DeterministicAppendZeros DeterministicCyclic
Number of bits generated	setNumberOfBits()	int	Any integer
Pattern length	setPatternLength()	int	Real number greater than zero
Number of bits	setNumberOfBits()	long	Integer number greater than zero
Number of samples per symbol	setNumberOfSamplesPerSymbol()	int	Integer number of the type 2^n with n also integer
Roll off factor	setRollOffFactor()	double	$\in [0,1]$
IQ amplitudes	setIqAmplitudes()	Vector of coordinate points in the I-Q plane	Example for a 4-qam mapping: { { 1.0, 1.0 }, { -1.0, 1.0 }, { -1.0, -1.0 }, { 1.0, -1.0 } }
Output optical power	setOutputOpticalPower()	int	Real number greater than zero
Save internal signals	setSaveInternalSignals()	bool	True or False

Table 7.12: List of input parameters of the block MQAM transmitter

Methods

MQamTransmitter(vector<Signal *> &inputSignal, vector<Signal *> &outputSignal);
(constructor)

void set(int opt);

void setMode(BinarySourceMode m)

BinarySourceMode const getMode(void)

void setProbabilityOfZero(double pZero)

double const getProbabilityOfZero(void)

void setBitStream(string bStream)

```
string const getBitStream(void)

void setNumberOfBits(long int nOfBits)

long int const getNumberOfBits(void)

void setPatternLength(int pLength)

int const getPatternLength(void)

void setBitPeriod(double bPeriod)

double const getBitPeriod(void)

void setM(int mValue) int const getM(void)

void setIqAmplitudes(vector<t_iqValues> iqAmplitudesValues)

vector<t_iqValues> const getIqAmplitudes(void)

void setNumberOfSamplesPerSymbol(int n)

int const getNumberOfSamplesPerSymbol(void)

void setRollOffFactor(double rOffFactor)

double const getRollOffFactor(void)

void setSeeBeginningOfImpulseResponse(bool sBeginningOfImpulseResponse)

double const getSeeBeginningOfImpulseResponse(void)

void setOutputOpticalPower(t_real outOpticalPower)

t_real const getOutputOpticalPower(void)

void setOutputOpticalPower_dBm(t_real outOpticalPower_dBm)

t_real const getOutputOpticalPower_dBm(void)
```

Output Signals

Number: 1 optical and 1 binary (optional)

Type: Optical signal

Example

Sugestions for future improvement

Add to the system another block similar to this one in order to generate two optical signals with perpendicular polarizations. This would allow to combine the two optical signals and generate an optical signal with any type of polarization.

7.23 Netxpto

Header File	:	netxpto.h
	:	netxpto_20180118.h
Source File	:	netxpto.cpp
	:	netxpto_20180118.cpp

This block can work in two configurations: with an external clock or without it. In the latter it accepts two input signals one being the clock and the other the signal to be demodulated. In the other configuration there's only one input signal which is the signal.

The output signal is obtained by sampling the input signal with a predetermined sampling rate provided either internally or by the clock.

Input Parameters

Parameter	Type	Values	Default
samplesToSkip	int	any (smaller than the number of samples generated)	0

Table 7.13: Sampler input parameters

Methods

Sampler()

Sampler(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig)

void initialize(void)

bool runBlock(void)

void setSamplesToSkip(t_integer sToSkip)

Functional description

This block can work with an external clock or without it.

In the case of having an external clock it accepts two input signals. The signal to be demodulate which is complex and a clock signal that is a sequence of Dirac delta functions with a predetermined period that corresponds to the sampling period. The signal and the clock signal are scanned and when the clock has the value of 1.0 the correspondent complex value of the signal is placed in the buffer corresponding to the output signal.

There's a detail worth noting. The electrical filter has an impulse response time length of 16 (in units of symbol period). This means that when modulating a bit the spike in the signal corresponding to that bit will appear 8 units of symbol period later. For this reason there's the need to skip the earlier samples of the signal when demodulating it. That's the purpose of the *samplesToSkip* parameter.

Between the binary source and the current block the signal is filtered twice which means that this effect has to be taken into account twice. Therefore the parameter *samplesToSkip* is given by $2 * 8 * \text{samplesPerSymbol}$.

Input Signals

Number: 1

Type: Electrical real (TimeContinuousAmplitudeContinuousReal)

Output Signals

Number: 1

Type: Electrical real (TimeDiscreteAmplitudeContinuousReal)

Examples

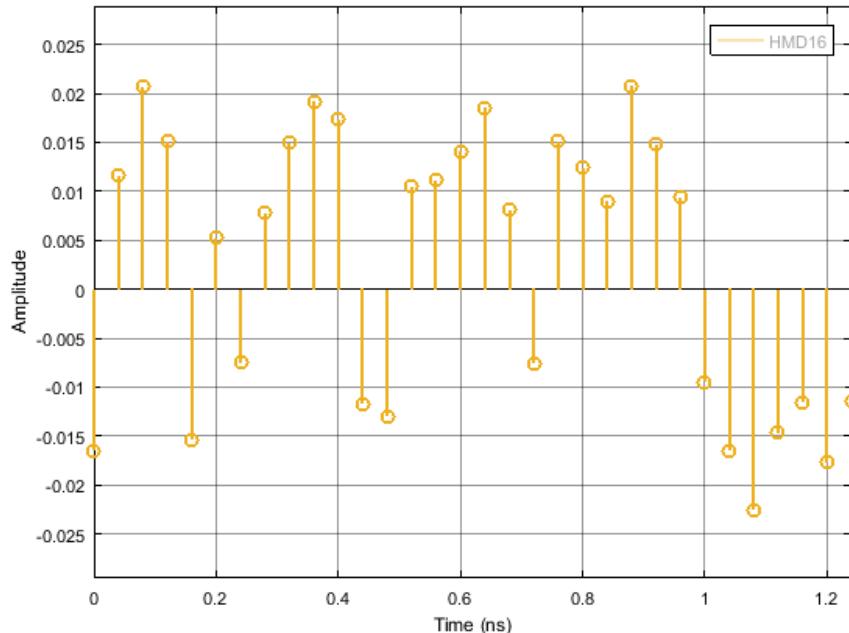


Figure 7.16: Example of the output signal of the sampler

7.23.1 Version 20180118

Adds the type `t_photon_mp_xy`, to support multi-path photon signals with polarization information.

Changes the signal data type to make private its data structure, only allowing its access through appropriate methods.

Sugestions for future improvement

7.24 **Polarization_rotator_20170113**

This block simulates a rotation of polarization input photon stream signal by using the information from the two real time continuous amplitude discrete input signals, which have information in Jones space about the rotation angle theta(θ) and the elevation angle phi (ϕ). This way, this block accepts three input signals: one photon stream and other two real continuous time amplitude discrete signals. The real discrete time input signals must be a signal discrete in time in which the amplitude corresponds to the value of the angle in degrees. This block will do the rotation based on a matrix calculation.

Input Parameters

This block has no input parameters.

State Variables

This block has two state parameters which initializes the angles θ and ϕ which will lead to any rotation of the polarization of the input signal. These variables must be controlled using the two input signals.

- double theta {0.0}
- double phi {0.0}

Methods

```
Polarizer (vector <Signal*> &inputSignals, vector <Signal*>&outputSignals) :  
Block(inputSignals, outputSignals) {};  
void initialize(void);  
bool runBlock(void);
```

Functional description

This block caused a rotation in polarization of the photon stream input signal. This rotation is controlled from the two input signals which correspond to rotation angle (θ) and elevation angle (ϕ) in the Poincare sphere. The representation is done in Jones Space. The photon stream input signal is represented by a matrix 2×1 :

$$S_{in} = \begin{bmatrix} A_x \\ A_y \end{bmatrix} \quad (7.9)$$

and the matrix that represents the polarization rotator is:

$$M = \begin{bmatrix} \cos(\theta) & \sin(\theta)e^{-i\phi} \\ -\sin(\theta)e^{i\phi} & \cos(\theta) \end{bmatrix} \quad (7.10)$$

This way the photon stream signal which outputs this block will be:

$$\begin{aligned} S_{out} &= M \times S_{in} \\ S_{out} &= \begin{bmatrix} A_x \cos(\theta) + A_y \sin(\theta) e^{-i\phi} \\ -A_x \sin(\theta) e^{i\phi} + A_y \cos(\theta) \end{bmatrix} \end{aligned} \quad (7.11)$$

Input Signals

Number : 3

Type : 1 Photon Stream and 2 ContinuousTimeDiscreteAmplitude.

Output Signals

Number : 1

Type : Photon Stream

Examples

Sugestions for future improvement

7.25 Probability Estimator

This blocks accepts an input binary signal and it calculates the probability of having a value "1" or "0" according to the number of samples acquired and according to the z-score value set depending on the confidence interval. It produces an output binary signal equals to the input. Nevertheless, this block has an additional output which is a txt file with information related with probability values, number of samples acquired and margin error values for each probability value.

In statistics theory, considering the results space Ω associated with a random experience and A an event such that $P(A) = p \in]0, 1[$. Lets $X : \Omega \rightarrow \mathbb{R}$ such that

$$\begin{aligned} X(\omega) &= 1 & \text{,if } \omega \in A \\ X(\omega) &= 0 & \text{,if } \omega \in \bar{A} \end{aligned} \tag{7.12}$$

This way, there only are two possible results: success when the outcome is 1 or failure when the outcome is 0. The probability of success is $P(X = 1)$ and the probability of failure is $P(X = 0)$,

$$\begin{aligned} P(X = 1) &= P(A) = p \\ P(X = 0) &= P(\bar{A}) = 1 - p \end{aligned} \tag{7.13}$$

X follows the Bernoulli law with parameter \mathbf{p} , $X \sim \mathbf{B}(p)$, being the expected value of the Bernoulli random value $E(X) = p$ and the variance $\text{VAR}(X) = p(1-p)$ [**probabilitySheldon**].

Assuming that N independent trials are performed, in which a success occurs with probability p and a failure occurs with probability $1-p$. If X is the number of successes that occur in the N trials, X is a binomial random variable with parameters (n, p) . Since N is large enough, X can be approximately normally distributed with mean np and variance $np(1-p)$.

$$\frac{X - np}{\sqrt{np(1-p)}} \sim N(0, 1). \tag{7.14}$$

In order to obtain a confidence interval for p , lets assume the estimator $\hat{p} = \frac{X}{N}$ the fraction of samples equals to 1 with regard to the total number of samples acquired. Since \hat{p} is the estimator of p , it should be approximately equal to p . As a result, for any $\alpha \in 0, 1$ we have that:

$$\frac{X - np}{\sqrt{np(1-p)}} \sim N(0, 1) \tag{7.15}$$

$$\begin{aligned} P\{-z_{\alpha/2} < \frac{X - np}{\sqrt{np(1-p)}} < z_{\alpha/2}\} &\approx 1 - \alpha \\ P\{-z_{\alpha/2}\sqrt{np(1-p)} < np - X < z_{\alpha/2}\sqrt{np(1-p)}\} &\approx 1 - \alpha \\ P\{\hat{p} - z_{\alpha/2}\sqrt{\hat{p}(1-\hat{p})/n} < p < \hat{p} + z_{\alpha/2}\sqrt{\hat{p}(1-\hat{p})/n}\} &\approx 1 - \alpha \end{aligned} \tag{7.16}$$

This way, a confidence interval for p is approximately $100(1 - \alpha)$ percent.

Input Parameters

- zscore
(double)
- fileName
(string)

Methods

```
ProbabilityEstimator(vector<Signal *> &InputSig, vector<Signal *> &OutputSig)
:Block(InputSig, OutputSig){};

void initialize(void);

bool runBlock(void);

void setProbabilityExpectedX(double probx) double getProbabilityExpectedX()

void setProbabilityExpectedY(double proby) double getProbabilityExpectedY()

void setZScore(double z) double getZScore()
```

Functional description

This block receives an input binary signal with values "0" or "1" and it calculates the probability of having each number according with the number of samples acquired. This probability is calculated using the following formulas:

$$\text{Probability}_1 = \frac{\text{Number of 1's}}{\text{Number of Received Bits}} \quad (7.17)$$

$$\text{Probability}_0 = \frac{\text{Number of 0's}}{\text{Number of Received Bits}}. \quad (7.18)$$

The error margin is calculated based on the z-score set which specifies the confidence interval using the following formula:

$$ME = z_{\text{score}} \times \sqrt{\frac{\hat{p}(1 - \hat{p})}{N}} \quad (7.19)$$

being \hat{p} the expected probability calculated using the formulas above and N the total number of samples.

This block outputs a txt file with information regarding with the total number of received bits, the probability of 1, the probability of 0 and the respective errors.

Input Signals

Number: 1

Type: Binary

Output Signals

Number: 2

Type: Binary

Type: txt file

Examples

Lets calculate the margin error for N of samples in order to obtain X inside a specific confidence interval, which in this case we assume a confidence interval of 99%.

We will use *z-score* from a table about standard normal distribution, which in this case is 2.576, since a confidence interval of 99% was chosen, to calculate the expected error margin,

$$\begin{aligned} ME &= \pm z_{\alpha/2} \frac{\sigma}{\sqrt{N}} \\ ME &= \pm z_{\alpha/2} \sqrt{\frac{\hat{p}(1 - \hat{p})}{N}}, \end{aligned} \quad (7.20)$$

where, ME is the error margin, $z_{\alpha/2}$ is the *z-score* for a specific confidence interval, $\sigma = \sqrt{\text{VAR}(X)} = \sqrt{\hat{p}(1 - \hat{p})}$ is the standard deviation and N the number of samples.

This way, with a 99% confidence interval, between $(\hat{p} - ME) \times 100$ and $(\hat{p} + ME) \times 100$ percent of the samples meet the standards.

Sugestions for future improvement

7.26 Rotator Linear Polarizer

This block accepts a Photon Stream signal and a Real discrete time signal. It produces a photon stream by rotating the polarization axis of the linearly polarized input photon stream by an angle of choice.

Input Parameters

- m[2]
- axis { {1,0}, { $\frac{\sqrt{2}}{2}, \frac{\sqrt{2}}{2}$ } }

Methods

```
RotatorLinearPolarizer(vector <Signal*> &inputSignals, vector <Signal*> &outputSignals) :
Block(inputSignals, outputSignals) {};
void initialize(void);
bool runBlock(void);
void setM(int mValue);
void setAxis(vector <t_iqValues> AxisValues);
```

Functional description

This block accepts the input parameter m, which defines the number of possible rotations. In this case m=2, the block accepts the rectilinear basis, defined by the first position of the second input parameter axis, and the diagonal basis, defined by the second position of the second input parameter axis. This block rotates the polarization axis of the linearly polarized input photon stream to the basis defined by the other input signal. If the discrete value of this signal is 0, the rotator is set to rotate the input photon stream by 0°, otherwise, if the value is 1, the rotator is set to rotate the input photon stream by an angle of 45°.

Input Signals

Number : 2

Type : Photon Stream and a Sequence of 0's and '1s (DiscreteTimeDiscreteAmplitude)

Output Signals

Number : 1

Type : Photon Stream

Examples

Sugestions for future improvement

7.27 Optical Switch

This block has one input signal and two input signals. Furthermore, it accepts an additional input binary input signal which is used to decide which of the two outputs is activated.

Input Parameters

No input parameters.

Methods

```
OpticalSwitch(vector <Signal*> &inputSignals, vector <Signal*> &outputSignals) :  
Block(inputSignals, outputSignals) {};  
void initialize(void);  
bool runBlock(void);
```

Functional description

This block receives an input photon stream signal and it decides which path the signal must follow. In order to make this decision it receives a binary signal (0's and 1's) and it switch the output path according with this signal.

Input Signals

Number : 1

Type : Photon Stream

Output Signals

Number : 2

Type : Photon Stream

Examples

Sugestions for future improvement

7.28 Optical Hybrid

Header File	:	optical_hybrid.h
Source File	:	optical_hybrid.cpp

This block simulates an optical hybrid. It accepts two input signals corresponding to the signal and to the local oscillator. It generates four output complex signals separated by 90° in the complex plane. Figure 7.17 shows a schematic representation of this block.

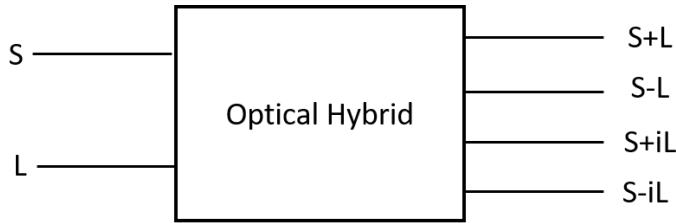


Figure 7.17: Schematic representation of an optical hybrid.

Input Parameters

Parameter	Type	Values	Default
outputOpticalPower	double	any	$1e - 3$
outputOpticalWavelength	double	any	$1550e - 9$
outputOpticalFrequency	double	any	$SPEED_OF_LIGHT / outputOpticalWavelength$
powerFactor	double	≤ 1	0.5

Table 7.14: Optical hybrid input parameters

Methods

OpticalHybrid()

```
OpticalHybrid(vector<Signal * > &InputSig, vector<Signal * > &OutputSig)
:Block(InputSig, OutputSig)
```

```
void initialize(void)
```

```
bool runBlock(void)
```

```
void setOutputOpticalPower(double outOpticalPower)
```

```
void setOutputOpticalPower_dBm(double outOpticalPower_dBm)
```

```
void setOutputOpticalWavelength(double outOpticalWavelength)  
void setOutputOpticalFrequency(double outOpticalFrequency)  
void setPowerFactor(double pFactor)
```

Functional description

This block accepts two input signals corresponding to the signal to be demodulated (S) and to the local oscillator (L). It generates four output optical signals given by $powerFactor \times (S + L)$, $powerFactor \times (S - L)$, $powerFactor \times (S + iL)$, $powerFactor \times (S - iL)$. The input parameter $powerFactor$ assures the conservation of optical power.

Input Signals

Number: 2

Type: Optical (OpticalSignal)

Output Signals

Number: 4

Type: Optical (OpticalSignal)

Examples

Sugestions for future improvement

7.29 Photoelectron Generator

Header File	:	photoelectron_generator_*.h
Source File	:	photoelectron_generator_*.cpp
Version	:	20180302 (Diamantino Silva)

This block simulates the generation of photoelectrons by a photodiode, performing the conversion of an incident electric field into an output current proportional to the field's instantaneous power. It is also capable of simulating shot noise.




Figure 7.18: Schematic representation of the photoelectron generator code block

Theoretical description

The operation of a real photodiode is based on the photoelectric effect, which consists on the removal of one electron from the target material by a single photon, with a probability η . Given an input beam with an optical power $P(t)$ in which the photons are around the wavelength λ , the flux of photons $\phi(t)$ is calculated as [1]

$$\phi(t) = \frac{P(t)\lambda}{hc} \quad (7.21)$$

therefore, the mean number of photons in a given interval $[t, t + T]$ is

$$\bar{n}(t) = \int_t^{t+T} \phi(\tau) d\tau \quad (7.22)$$

But the actual number of photons in a given time interval, $n(t)$, is random. If we assume that the electric field is generated by an ideal laser with constant power, then $n(t)$ will follow a Poisson distribution

$$p(n) = \frac{\bar{n}^n \exp(-\bar{n})}{n!} \quad (7.23)$$

where $n = n(t)$ and $\bar{n} = \bar{n}(t)$.

For each incident photon, there is a probability η of generating a phototelectron. Therefore, we can model the generation of photoelectrons during this time interval, as a binomial process where the number of events is equal to the number of incident photons, $n(t)$, and the rate of success is η . If we combine the two random processes, binomial photoelectron generation after poissonian photon flux, the number of output photoelectrons in this time interval, $m(t)$, will follow [1]

$$m \sim \text{Poisson}(\eta\bar{n}) \quad (7.24)$$

with $\bar{m} = \eta\bar{n}$ where $m = m(t)$.

Functional description

The input of this block is the electric field amplitude, $A(t)$, with sampling period T . The first step consists on the calculation the instantaneous power. Given that the input amplitude is a baseband representation of the original signal, then $P(t) = 4|A(t)|^2$. From this result, the average number of photons $\bar{n}(t) = TP(t)\lambda/hc$.

If the shot-noise is negleted, then the output number of photoelectrons, $n_e(t)$ in the interval, will be equal to

$$m(t) = \eta \bar{n}(t) \quad (7.25)$$

If the shot-noise is considered, then the output fluctuations will be simulated by generating a value from a Poissonian random number generator with mean $\eta \bar{n}(t)$

$$m(t) \sim \text{Poisson} \left(\eta \bar{n}(t) \right) \quad (7.26)$$

Input Parameters

Parameter	Default Value	Description
efficiency	1.0	Photodiode's quantum efficiency.
shotNoise	false	Shot-noise off/on.

Methods

PhotoelectronGenerator()

PhotoelectronGenerator(vector<Signal *> &InputSig, vector<Signal *> &OutputSig)
:Block(InputSig, OutputSig)

void initialize(void)

bool runBlock(void)

void setEfficiency(t_real efficiency)

void getEfficiency()

void setShotNoise(bool shotNoise)

void getShotNoise()

Input Signals

Number: 1

Type: Optical (OpticalSignal)

Output Signals

Number: 1

Type: Electrical (TimeDiscreteAmplitudeContinuousReal
TimeContinuousAmplitudeContinuousReal) or

Examples




Figure 7.19: Constant power simulation setup

To test the output of this block, we recreated the results of figure 11.2 – 3 in [1]. We started by simulating the constant optical power case, in which the local oscillator power was fixed to a constant value. Two power levels were tested, $P = 1\mu W$ and $P = 1nW$, using a sample period of 20 picoseconds and photoelectron generator efficiency of 1.0. The simulation code is in folder `lib \photoelectron_generator \photoelectron_generator_test_constant`. The following plots show the number of output electrons per sample when the shot noise is ignored or considered

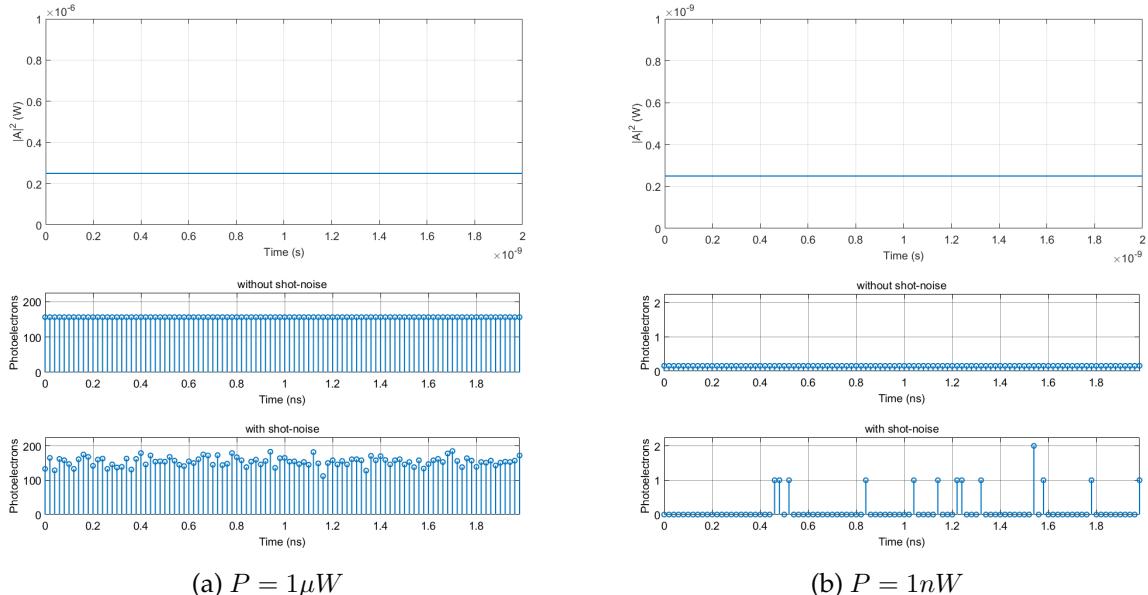


Figure 7.20: Upper plots: input optical squared amplitude on the photoelectron generator; Middle plots: number of output photoelectrons per sample neglecting quantum noise; Bottom plots: number of output photoelectrons per sample considering quantum noise.

Figure 7.20 shows clearly that turning the quantum noise on or off will produce a signal with or without variance, as predicted. If we compare this result with plot (a) in [1], in particular $P = 1nW$, we see that they are in conformance, with a slight difference, where a sample has more than one photoelectron. In contrast with the reference result, where only single events are represented, the $P = 1\mu W$ case shows that all samples account many photoelectrons. Given it's input power, multiple photoelectron generation events will occur during the sample time window. Therefore, to recreate the reference result, we just need to reduce the sample period until the probability of generating more than 1 photoelectron per sample goes to 0.




Figure 7.21: Variable power simulation setup

To recreate plot (b) in [1], a more complex setup was used, where a series of states are generated and shaped by a MQAM, creating a input electric field with time-varying power. The simulation code is in folder lib \photoelectron_generator \photoelectron_generator_variable.

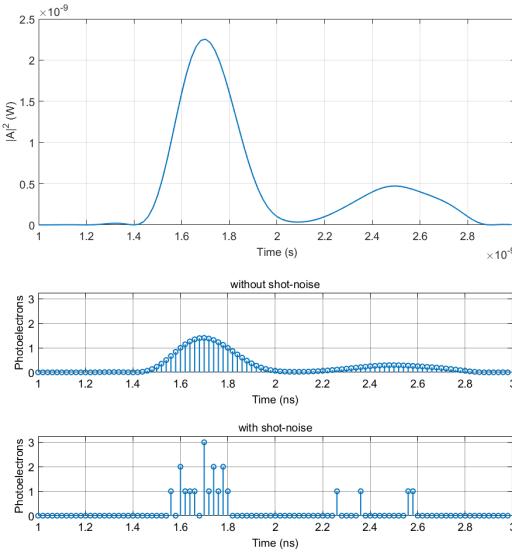


Figure 7.22: Upper plots: input optical squared amplitude on the photoelectron generator; Middle plots: number of output photoelectrons per sample neglecting quantum noise; Bottom plots: number of output photoelectrons per sample considering quantum noise.

Figure 7.22 shows that the output without shot-noise is following the input power perfectly, apart from a constant factor. In the case with shot-noise, we see that there are only output samples in high power input samples. These results are not following strictly plot (b) in [1], because has already discussed previously, in the high power input samples, we have a great probability of generating many photoelectrons.

Sugestions for future improvement

7.30 Pulse Shaper

Header File	:	pulse_shaper.h
Source File	:	pulse_shaper.cpp

This block applies an electrical filter to the signal. It accepts one input signal that is a sequence of Dirac delta functions and it produces one output signal continuous in time and in amplitude.

Input Parameters

Parameter	Type	Values	Default
filterType	string	RaisedCosine, Gaussian	RaisedCosine
impulseResponseTimeLength	int	any	16
rollOffFactor	real	$\in [0, 1]$	0.9

Table 7.15: Pulse shaper input parameters

Methods

```

PulseShaper(vector<Signal * > &InputSig, vector<Signal * > OutputSig)
:FIR_Filter(InputSig, OutputSig){};

void initialize(void);

void setImpulseResponseTimeLength(int impResponseTimeLength)

int const getImpulseResponseTimeLength(void)

void setFilterType(PulseShaperFilter fType)

PulseShaperFilter const getFilterType(void)

void setRollOffFactor(double rOffFactor)

double const getRollOffFactor()

```

Functional Description

The type of filter applied to the signal can be selected through the input parameter *filterType*. Currently the only available filter is a raised cosine.

The filter's transfer function is defined by the vector *impulseResponse*. The parameter *rollOffFactor* is a characteristic of the filter and is used to define its transfer function.

Input Signals

Number : 1

Type : Sequence of Dirac Delta functions (ContinuousTimeDiscreteAmplitude)

Output Signals

Number : 1

Type : Sequence of impulses modulated by the filter (ContinuousTimeContinuousAmplitude)

Example

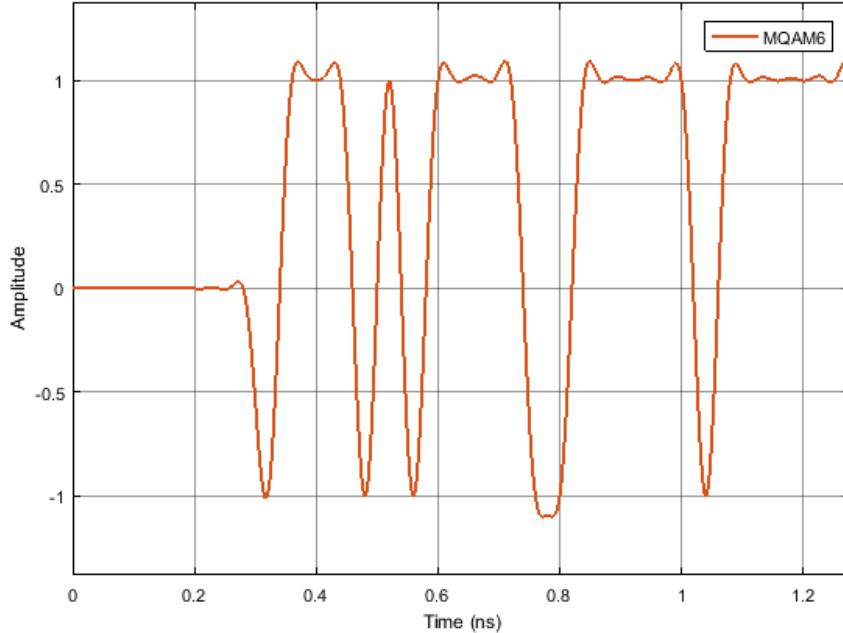


Figure 7.23: Example of a signal generated by this block for the initial binary signal 0100...

Sugestions for future improvement

Include other types of filters.

7.31 Sampler

Header File	:	sampler.h
Source File	:	sampler_20171119.cpp

This block can work in two configurations: with an external clock or without it. In the latter it accepts two input signals one being the clock and the other the signal to be demodulated. In the other configuration there's only one input signal which is the signal.

The output signal is obtained by sampling the input signal with a predetermined sampling rate provided either internally or by the clock.

Input Parameters

Parameter	Type	Values	Default
samplesToSkip	int	any (smaller than the number of samples generated)	0

Table 7.16: Sampler input parameters

Methods

Sampler()

Sampler(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig)

void initialize(void)

bool runBlock(void)

void setSamplesToSkip(t_integer sToSkip)

Functional description

This block can work with an external clock or without it.

In the case of having an external clock it accepts two input signals. The signal to be demodulate which is complex and a clock signal that is a sequence of Dirac delta functions with a predetermined period that corresponds to the sampling period. The signal and the clock signal are scanned and when the clock has the value of 1.0 the correspondent complex value of the signal is placed in the buffer corresponding to the output signal.

There's a detail worth noting. The electrical filter has an impulse response time length of 16 (in units of symbol period). This means that when modulating a bit the spike in the signal corresponding to that bit will appear 8 units of symbol period later. For this reason there's

the need to skip the earlier samples of the signal when demodulating it. That's the purpose of the *samplesToSkip* parameter.

Between the binary source and the current block the signal is filtered twice which means that this effect has to be taken into account twice. Therefore the parameter *samplesToSkip* is given by $2 * 8 * \text{samplesPerSymbol}$.

Input Signals

Number: 1

Type: Electrical real (TimeContinuousAmplitudeContinuousReal)

Output Signals

Number: 1

Type: Electrical real (TimeDiscreteAmplitudeContinuousReal)

Examples

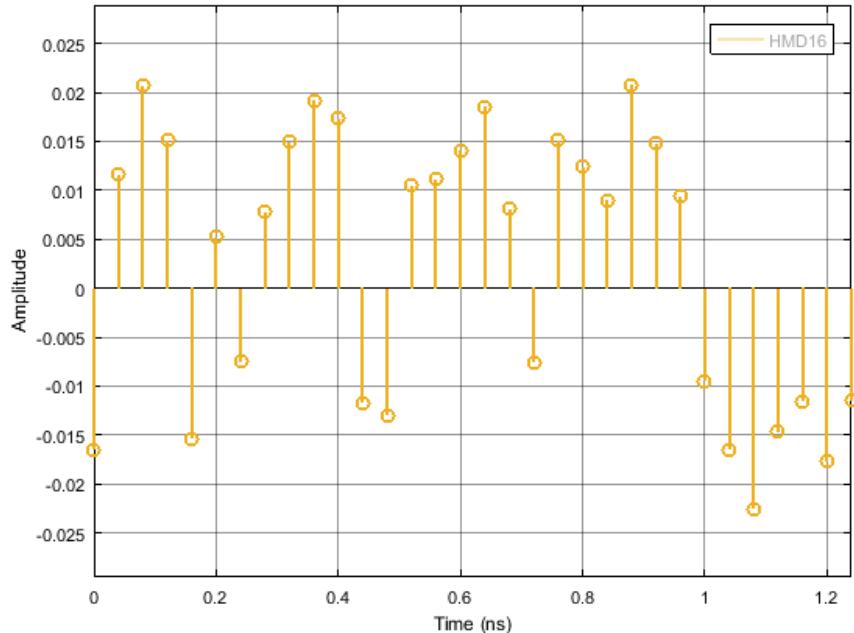


Figure 7.24: Example of the output signal of the sampler

Sugestions for future improvement

7.32 Single Photon Receiver

This block of code simulates the reception of two time continuous signals which are the outputs of single photon detectors and decode them in measurements results. A simplified schematic representation of this block is shown in figure 7.25.

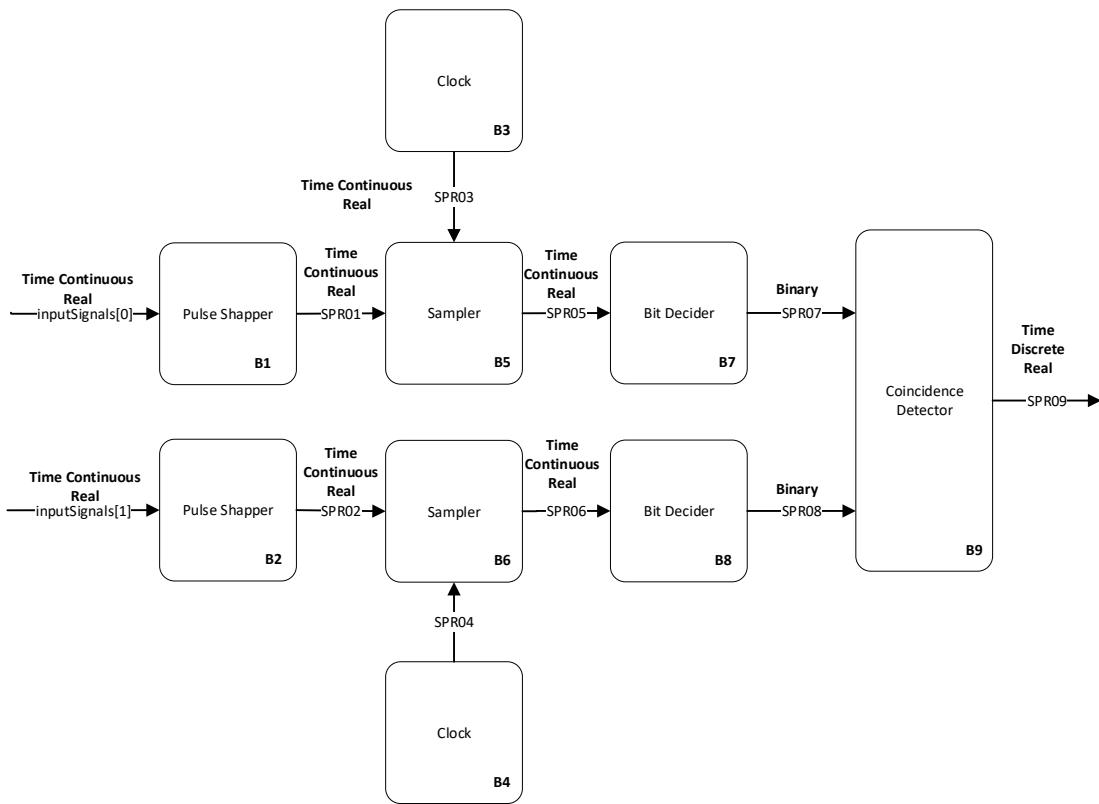


Figure 7.25: Basic configuration of the SPR receiver

Functional description

This block accepts two time continuous input signals and outputs one time discrete signal that corresponds to the single photon detection measurements demodulation of the input signal. It is a complex block (as it can be seen from figure 7.25 of code made up of several simpler blocks whose description can be found in the *lib* repository).

It can also be seen from figure 7.25 that there are two extra internal input signals generated by the *Clock* in order to keep all blocks synchronized. This block is used to provide the sampling frequency to the *Sampler* blocks.

Input parameters

This block has some input parameters that can be manipulated by the user in order to change the basic configuration of the receiver. Each parameter has associated a function that allows for its change. In the following table (table 7.19) the input parameters and corresponding functions are summarized.

Input parameters	Function	Type	Accepted values
samplesToSkip	Samples to skip in sampler block	int values	
filterType	Type of the filter applied in pulse shapper	PulseShaperFilter	

Table 7.17: List of input parameters of the block SP receiver

Methods

```
SinglePhotonReceiver(vector <Signal*> &inputSignals, vector <Signal*> &outputSignals)({constructor})
```

```
void setPulseShaperFilter(PulseShaperFilter fType)
```

```
void setPulseShaperWidth(double pulseW)
```

```
void setClockBitPeriod(double period)
```

```
void setClockPhase(double phase)
```

```
void setClockSamplingPeriod(double sPeriod)
```

```
void setThreshold(double threshold)
```

Input Signals

Number: 2

Type: Time Continuous Amplitude Continuous Real

Output Signals

Number: 1

Type: Time Discrete Amplitude Discrete Real

Example

Sugestions for future improvement

7.33 Sink

Header File	:	sink.h
Source File	:	sink.cpp

This block accepts one input signal and it does not produce output signals. It takes samples out of the buffer until the buffer is empty. It has the option of displaying the number of samples still available.

Input Parameters

Parameter	Type	Values	Default
numberOfSamples	long int	any	-1

Table 7.18: Sampler input parameters

Methods

`Sink(vector<Signal *> &InputSig, vector<Signal *> &OutputSig)`

`bool runBlock(void)`

`void setNumberOfSamples(long int nOfSamples)`

`void setDisplayNumberOfSamples(bool opt)`

Functional Description

7.34 SNR of the Photoelectron Generator

Header File	:	srn_photoelectron_generator_*.h
Source File	:	srn_photoelectron_generator_*.cpp
Version	:	20180309 (Diamantino Silva)

This block estimates the signal to noise ratio (SNR) of a input stream of photoelectrons, for a given time window.




Figure 7.26: Schematic representation of the SNR of the Photoelectron Generator code block

Theoretical description

The input of this block is a stream of samples, y_j , each one of them corresponding to a number of photoelectrons generated in a time interval Δt . These photoelectrons are usually the output of a photodiode (photoelectron generator). To calculate the SNR of this stream, we will use the definition used in [1]

$$\text{SNR} = \frac{\bar{n}^2}{\sigma_n^2} \quad (7.27)$$

in which \bar{n} is the mean value and σ_n^2 is the variance of the photon number in a given time interval T .

To apply this definition to our input stream, we start by separate it's samples in contiguous time windows with duration T . Each time window k is defined as the time interval $[kT, (k + 1)T[$. To estimate the SNR for each time window, we will use the following estimators for the mean, μ_k , and variance, s_k^2 [2]

$$\mu_k = \langle y \rangle_k \quad s_k^2 = \frac{N}{N-1} \left(\langle y^2 \rangle_k - \langle y \rangle_k^2 \right) \quad (7.28)$$

where $\langle y^n \rangle_k$ is the n moment of the k window given by

$$\langle y^n \rangle_k = \frac{1}{N_k} \sum_{j=j_{\min}(k)}^{j_{\max}(k)} y_j^n \quad (7.29)$$

in which

$$j_{min}(k) = \lceil t_k / \Delta t \rceil \quad (7.30)$$

$$j_{max}(k) = \lceil t_{k+1} / \Delta t \rceil - 1 \quad (7.31)$$

$$N_k = j_{max}(k) - j_{min}(k) + 1 \quad (7.32)$$

$$t_k = kT \quad (7.33)$$

where $\lceil x \rceil$ is the ceiling function.

In our implementation, we define two variables, $S_1(k)$ and $S_2(k)$, corresponding to the sum of the samples and the sum of the squares of the sample in the time interval k . These two sums are related to the moments as

$$S_1(k) = N_k \langle y \rangle_k \quad (7.34)$$

$$S_2(k) = N_k \langle y^2 \rangle_k \quad (7.35)$$

Using these two variables, we can rewrite μ_k and s_k^2 as

$$\mu_k = \frac{S_1(k)}{N_k} \quad s_k^2 = \frac{1}{N_k - 1} \left(S_2(k) - \frac{1}{N_k} (S_1(k))^2 \right) \quad (7.36)$$

The signal to noise ratio of the time interval k , SNR_k , can be expressed as

$$\text{SNR}_k = \frac{\mu_k^2}{\sigma_k^2} = \frac{N_k - 1}{N_k} \frac{(S_1(k))^2}{N_k S_2(k) - (S_1(k))^2} \quad (7.37)$$

One particularly important case is the phototransistor stream resulting from the conversion of a laser photon stream by a photodiode (phototransistor generator). The resulting SNR will be [1]

$$\text{SNR} = \eta \bar{n} \quad (7.38)$$

in which η is the photodiode quantum efficiency.

Functional description

This block is designed to operate in time windows, dividing the input stream in contiguous sets of samples with a duration $t_{\text{Window}} = T$. For each time window, the general process consists in accumulating the input sample values and the square of the input sample values, and calculating the SNR of the time window based on these two variables.

To process this accumulation, the block uses two state variables, `aux_sum1` and `aux_sum2`, which hold the accumulation of the sample values and accumulation of the square of sample values, respectively.

The block starts by calculating the number of samples it has to process for the current time window, using equations 7.31, 7.32 and 7.33. If the duration of t_{Window} is 0, then we assume that this time window has infinite time (infinite samples). The values of `aux_sum1` and `aux_sum2` are set to 0, and the processing of the samples of current window begins.

After processing all the samples of the time window, we obtain $S_1(k)$ and $S_2(k)$ from the

state variables as $S_1(k) = \text{aux_sum1}$ and $S_2(k) = \text{aux_sum2}$, and proceed to the calculation of the SNR_k , using equation 7.37.

If the simulation ends before reaching the end of the current time window, we calculate the SNR_k , using the current values of `aux_sum1`, `aux_sum2` for $S_1(k)$ and $S_2(k)$, and the number of samples already processed, `currentWindowSample`, for N_k .

Input Parameters

Parameter	Default Value	Description
windowTime	0	SNR time window.

Methods

`SnrPhotoelectronGenerator()`

`SnrPhotoelectronGenerator(vector<Signal *> &InputSig, vector<Signal *> &OutputSig)`
`:Block(InputSig, OutputSig)`

`void initialize(void)`

`bool runBlock(void)`

`void setTimeWindow(t_real timeWindow)`

Input Signals

Number: 1

Type: Electrical (TimeDiscreteAmplitudeContinuousReal)

Output Signals

Number: 1

Type: Electrical (TimeDiscreteAmplitudeContinuousReal)

Examples




Figure 7.27: Simulation setup

To confirm the block's correct output, we have designed a simulation setup which calculates the SNR of a stream of photoelectrons generated by the detection of a laser photon stream by a photodiode.

The simulation has three main parameters, the power of the local oscillator, P_{LO} , the duration of the time window, T , and the photodiode's quantum efficiency, η . For each combination of these three parameters, the simulation generates 1000 SNR samples, during which all parameters stay constant. The final result is the average of these SNR samples. The simulations were performed with a sample time $\Delta t = 10^{-10}s$.

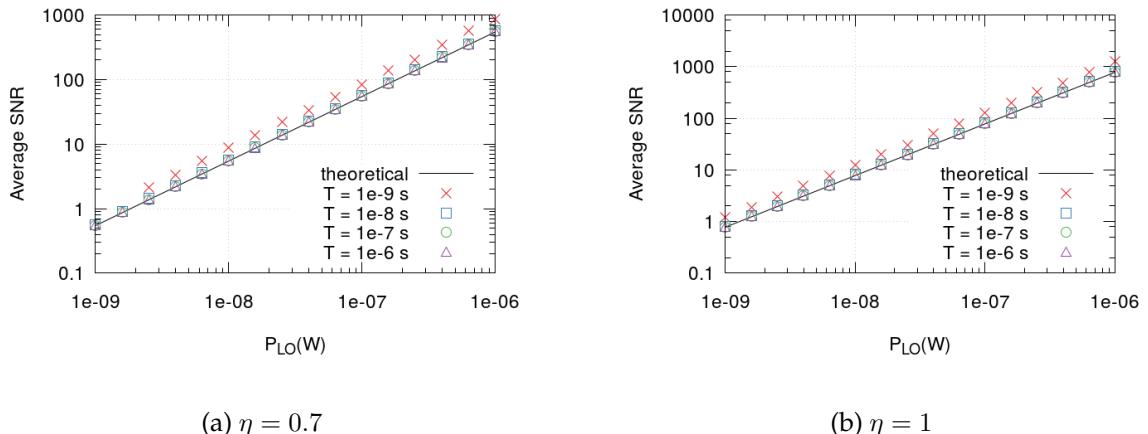


Figure 7.28: Theoretical and simulated results of the average SNR, for two photodiode efficiencies.

The plots in 7.28 show the comparison between the theoretical result 7.38 and the simulation results. We see that for low values of T , the average SNR shows a systematic deviation from the theoretical result, but for $T > 10^{-6}s$ (10000 samples per time window), the simulation result shows a very good agreement with the theoretical result.

The simulations also show a lack of average SNR results when low power, low efficiency and small time window are combined (see plot 7.28a). This is because in those conditions, the probability of having a time windows with no photoelectrons, creating an invalid SNR, is very high, which will prevent the calculation of the average SNR.

We can estimate the probability of calculating a valid SNR average by calculating the probability of no time window having 0 photoelectrons, $p_{ave} = (1 - q)^M$, in which q is the probability of a time window having all its samples equal to 0 and M is the number of time windows. We know that the input stream follows a Poisson distribution with mean \bar{m} , therefore $q = (\exp(-\bar{m}))^N$, in which $\bar{m} = \eta P \lambda / hc$ and $N = T / \Delta t$, is the average number of samples per time window. Using this result, we obtain the probability of calculating a valid SNR average as

$$p_{ave} = (1 - \exp(-N\bar{m}))^M \quad (7.39)$$

Block problems

Future work

The block could also output a confidence interval for the calculated SNR. Given that the output of the Photoelectron Generator follows a Poissonian distribution when the shot noise is on, the article "Confidence intervals for signal to noise ratio of a Poisson distribution" by Florence George and B.M. Kibria [3], could be used as a reference to implement such feature.

References

- [1] B. E. Saleh and M. C. Teich. *Fundamentals of photonics*. Wiley series in pure and applied optics. New York (NY): John Wiley & Sons, 1991.
- [2] S. W. Smith et al. *The scientist and engineer's guide to digital signal processing*. California Technical Pub. San Diego, 1997.
- [3] G. Florence and K. B. Golam. "Confidence intervals for signal to noise ratio of a Poisson distribution". In: *American Journal of Biostatistics* 2.2 (2011), p. 44.

7.35 SOP Modulator

This block of code simulates a modulation of the State Of Polarization (SOP) in a quantum channel, which intends to insert possible errors occurred during the transmission due to the polarization rotation of single photons. These SOP changes can be simulated using deterministic or stochastic methods. The type of simulation is one of the input parameters when the block is initialized.

Functional description

This block intends to simulate SOP changes using deterministic and stochastic methods. The required function mode must be set when the block is initialized. Furthermore, other input parameters should be also set at initialization. If a deterministic method was set by the user, he also needs to set the θ and ϕ angles in degrees, which corresponds to the two parameters of Jones Space in Poincare Sphere thereby being the rotation and elevation angle, respectively.

Input parameters

SOP modulator block must have an input signals to set the clock of the operations. This block has some input parameters that can be manipulated by the user in order to change the basic configuration of the SOP modulator. Each parameter has associated a function that allows for its change. In the following table (table 7.19) the input parameters and corresponding functions are summarized.

Input parameters	Function	Accepted values
sopType	Simulation type that the user intends to simulate.	Deterministic OR Stochastic
theta	Rotation Angle in Jones space for deterministic rotation in degrees	double
phi	Elevation Angle in Jones space for deterministic rotation in degrees	double

Table 7.19: List of input parameters of the block Optical Fiber

Methods

SOPModulator(vector <Signal*> &inputSignals, vector <Signal*>

&outputSignals)({constructor})

void initialize(void)

```
bool runBlock(void)  
  
void setSOPType(SOPType sType)  
  
void setRotationAngle(double angle)  
  
void setElevationAngle(double angle)
```

Input Signals**Number:** 1**Type:** Time Continuous Amplitude Continuous Real (Clock)**Output Signals****Number:** 2**Type:** Time Continuous Amplitude Discrete Real (correspond to the two parameters of Jones in units of degrees)**Example****Sugestions for future improvement**

7.36 White Noise

Header File	:	white_noise_20180118.h
Source File	:	white_noise_20180118.cpp

This block generates a gaussian pseudo-random noise signal with a given spectral density. It can be initialized with three different seeding methods to allow control over correlation and reproducibility:

1. DefaultDeterministic
2. RandomDevice
3. Selected

This block does not accept any input signal. It produces can produce a real or complex output, depending on the used output signal.

Input Parameters

Parameter	Type	Values	Default
seedType	enum	DefaultDeterministic, RandomDevice, Selected	RandomDevice
spectralDensity	real	> 0	10^{-4}
seed	int	$\in [1, 2^{32} - 1]$	1

Table 7.20: White noise input parameters

Methods

```
WhiteNoise(vector<Signal *> &InputSig, vector<Signal *> &OutputSig) :Block(InputSig, OutputSig);
```

```
void initialize(void);
bool runBlock(void);
void setNoiseSpectralDensity(double SpectralDensity) spectralDensity = SpectralDensity;
double const getNoiseSpectralDensity(void) return spectralDensity;
void setSeedType(SeedType sType) seedType = sType;
SeedType const getSeedType(void) return seedType;
void setSeed(int newSeed) seed = newSeed;
int getSeed(void) return seed;
```

Functional description

The *seedType* parameter allows the user to select between one of the three seeding methods to initialize the pseudo-random number generators (PRNGs) responsible for generating the noise signal.

DefaultDeterministic: Uses default seeds to initialize the PRNGs. These are different for all generators used within the same block, but remain the same for sequential runs or different *white_noise* blocks. Therefore, if more than one *white_noise* block is used, another seeding method should be chosen to avoid producing the exact same noise signal in all sources.

RandomDevice: Uses randomly chosen seeds using *std::random_device* to initialize the PRNGs.

SingleSelected: Uses one user selected seed to initialize the PRNGs. The selected seed is passed through the variable *seed*. If more than one generator is used, additional seeds are created by choosing the next sequential integers. For instance, if the user selected seed is 10, and all the four PRNGs are used, the used seeds will be [10, 11, 12, 13].

The noise is then obtained from a gaussian distribution with variance equal to the spectral density. If the signal is complex, the noise is calculated independently for the real and imaginary parts, with half the spectral density in each.

Input Signals

Number: 0

Output Signals

Number: 1 or more

Type: RealValue, ComplexValue or ComplexValueXY

Examples

Random Mode

Suggestions for future improvement

Chapter 8

Mathlab Tools

8.1 Generation of AWG Compatible Signals

Students Name	:	Francisco Marques dos Santos
	:	Romil Patel
Goal	:	Convert simulation signals into waveform files compatible with the laboratory's Arbitrary Waveform Generator
Version	:	sgnToWfm.m (Student Name : Francisco Marques dos Santos) : sgnToWfm_20171119.m (Student Name : Romil Patel)

This section shows how to convert a simulation signal into an AWG compatible waveform file through the use of a matlab function called sgnToWfm. This allows the application of simulated signals into real world systems.

8.1.1 sgnToWfm.m

Structure of a function

```
[data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] =  
sgnToWfm(fname_sgn, nReadr, fname_wfm);
```

Inputs

fname_sgn: Input filename of the signal (*.sgn) you want to convert. It must be a real signal (Type: TimeContinuousAmplitudeContinuousReal).

nReadr: Number of symbols you want to extract from the signal.

fname_wfm: Name that will be given to the waveform file.

Outputs

A waveform file will be created in the Matlab current folder. It will also return six variables in the workspace which are:

data: A vector with the signal data.

symbolPeriod: Equal to the symbol period of the corresponding signal.

samplingPeriod: Sampling period of the signal.

type: A string with the name of the signal type.

numberOfSymbols: Number of symbols retrieved from the signal.

samplingRate: Sampling rate of the signal.

Functional Description

This matlab function generates a *.wfm file given an input signal file (*.sgn). The waveform file is compatible with the laboratory's Arbitrary Waveform Generator (Tektronix AWG70002A). In order to recreate it appropriately, the signal must be real, not exceed 8×10^9 samples and have a sampling rate equal or bellow 16 GS/s.

This function can be called with one, two or three arguments:

Using one argument:

```
[ data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] =  
sgnToWfm('S6.sgn');
```

This creates a waveform file with the same name as the *.sgn file and uses all of the samples it contains.

Using two arguments:

```
[ data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] =  
sgnToWfm('S6.sgn',256);
```

This creates a waveform file with the same name as the signal file name and the number of samples used equals nReadr x samplesPerSymbol. The samplesPerSymbol constant is defined in the *.sgn file.

Using three arguments:

```
[ data, symbolPeriod, samplingPeriod, type, numberOfSymbols, samplingRate] =  
sgnToWfm('S6.sgn',256,'myWaveform.wfm');
```

This creates a waveform file with the name "myWaveform" and the number of samples used equals nReadr x samplesPerSymbol. The samplesPerSymbol constant is defined in the *.sgn file.

8.1.2 sgnToWfm_20171121.m

Structure of a function

```
[dataDecimate, data, symbolPeriod,  
samplingPeriod, type, numberOfSymbols, samplingRate, samplingRateDecimate] =  
sgnToWfm_20171121(fname_sgn, nReadr, fname_wfm)
```

Inputs

Same as discussed above in the file sgnToWfm.m.

Outputs

The output of the function sgnToWfm_20171121.m contains eight different parameters. Among those eight different parameters, six output parameters are the same as discussed above in the function sgnToWfm.m and remaining two parameters are the following:

dataDecimate: A vector which contains decimated signal data by an appropriate decimation factor to make it compatible with the AWG.

samplingRateDecimate: Reduced sampling rate which is compatible with AWG. (i.e. less than 16 GSa/s).

«««< HEAD

Functional Description

The functional description is same as discussed above in sgnToWfm.m. =====

Outputs

The output of the function version 20171121 contains eight different parameters. Among those eight parameters, six output parameters are the same as discussed above in the version 20170930 and remaining two parameters are the following:

Name of output signals	Description
dataDecimate	A vector which contains decimated signal data by an appropriate decimation factor to make it compatible with the AWG.
samplingRateDecimate	Reduced sampling rate which is compatible with AWG. (i.e. less than 16 GSa/s).

Decimation factor calculation

The flowchart for calculating the decimation factor is as follows:

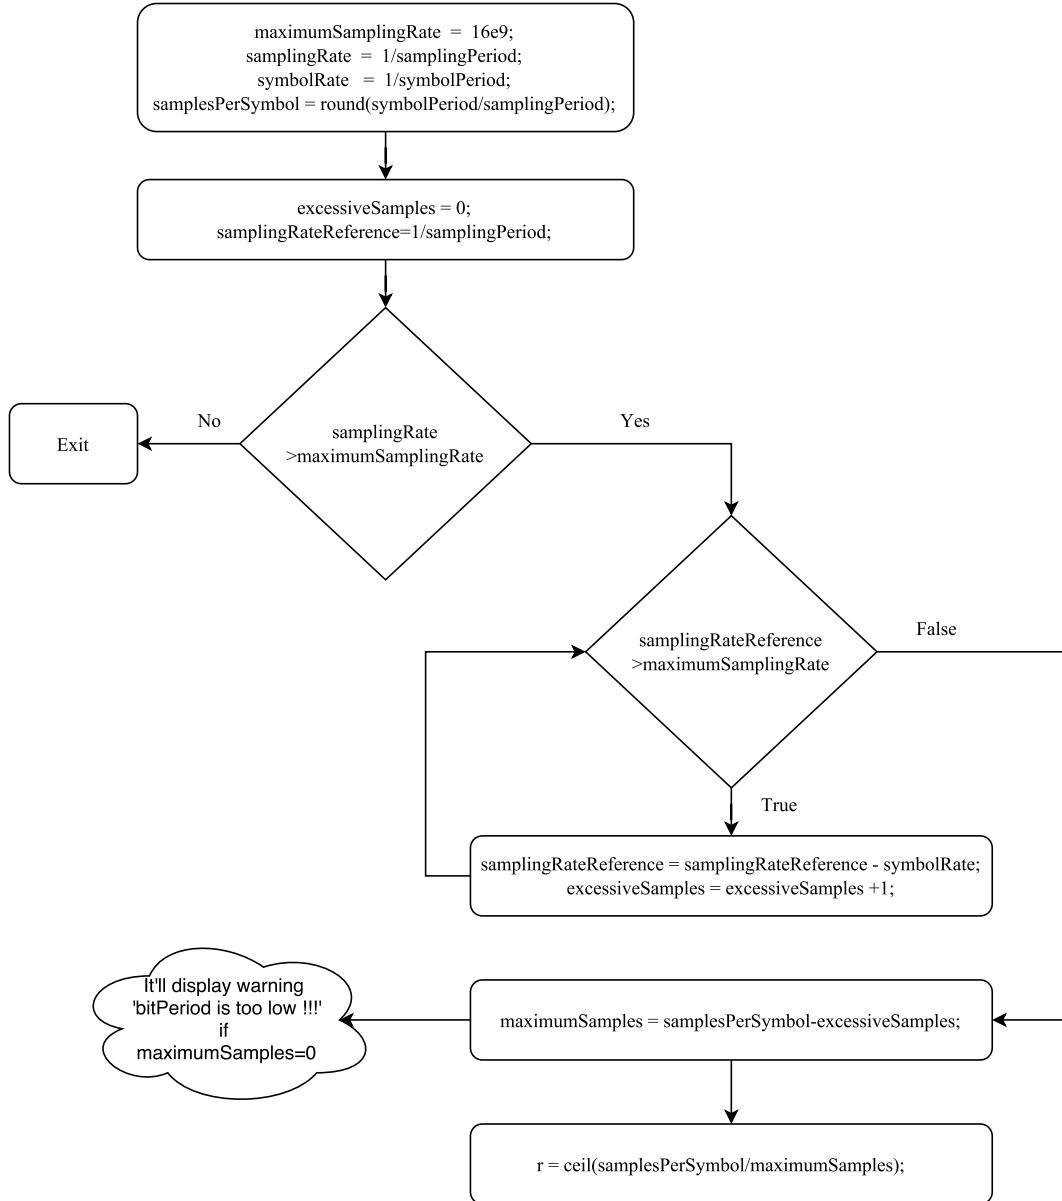


Figure 8.1: Flowchart to calculate decimation factor

»»»» Develop.Romil

8.1.3 Loading a signal to the Tektronix AWG70002A

The AWG we will be using is the Tektronix AWG70002A which has the following key specifications:

Sampling rate up to 16 GS/s: This is the most important characteristic because it determines the maximum sampling rate that your signal can have. It must not be over 16 GS/s or else the AWG will not be able to recreate it appropriately.

8 GSample waveform memory: This determines how many data points your signal can have.

After making sure this specifications are respected you can create your waveform using the function. When you load your waveform, the AWG will output it and repeat it constantly until you stop playing it.

1. Using the function `sgnToWfm`: Start up Matlab and change your current folder to mtools and add the signals folder that you want to convert to the Matlab search path. Use the function accordingly, putting as the input parameter the signal file name you want to convert.

2. AWG sampling rate: After calling the function there should be waveform file in the mtools folder, as well as a variable called samplingRate in the Matlab workspace. Make sure this is equal or bellow the maximum sampling frequency of the AWG (16 GS/s), or else the waveform can not be equal to the original signal. If it is higher you have to adjust the parameters in the simulation in order to decrease the sampling frequency of the signal(i.e. decreasing the bit period or reducing the samples per symbol).

3. Loading the waveform file to the AWG: Copy the waveform file to your pen drive and connect it to the AWG. With the software of the awg open, go to browse for waveform on the channel you want to use, and select the waveform file you created (Figure 7.1).

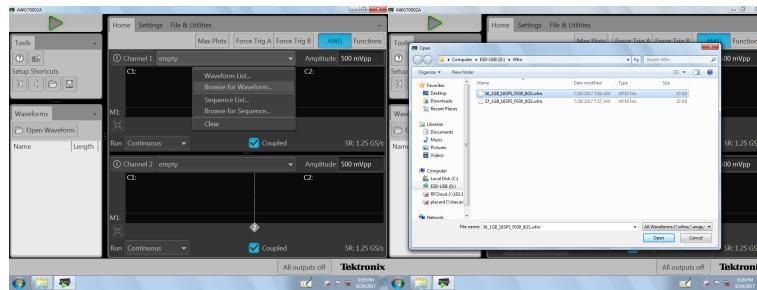


Figure 8.2: Selecting your waveform in the AWG

Now you should have the waveform displayed on the screen. Although it has the same shape, the waveform might not match the signal timing wise due to an incorrect sampling rate configured in the AWG. In this example (Figure 7.2), the original signal has a sample rate of 8 GS/s and the AWG is configured to 1.25 GS/s. Therefore it must be changed to the correct value. To do this go to the settings tab, clock settings, and change the sampling rate to be equal to the one of the original signal, 8 GS/s (Figure 7.3). Compare the waveform in the AWG with the original signal, they should be identical (Figure 7.4).

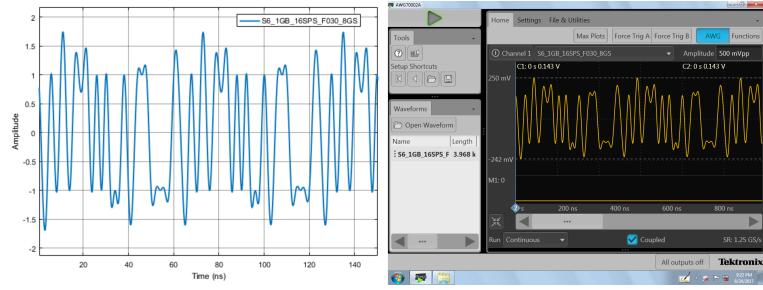


Figure 8.3: Comparison between the waveform in the AWG and the original signal before configuring the sampling rate

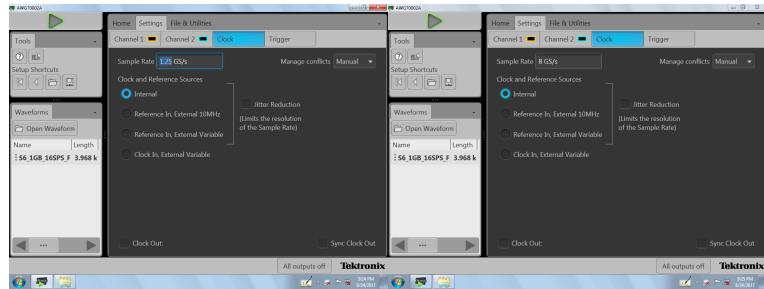


Figure 8.4: Configuring the right sampling rate

4. Generate the signal: Output the wave by enabling the channel you want and clicking on the play button.

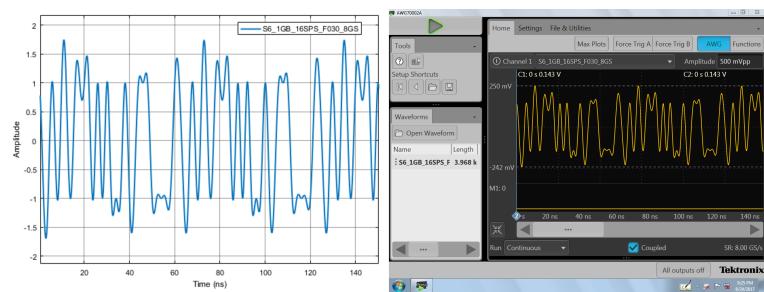


Figure 8.5: Comparison between the waveform in the AWG and the original signal after configuring the sampling rate

Chapter 9

Algorithms

9.1 Fast Fourier Transform

Header File	:	fft_*.h
Source File	:	fft_*.cpp
Version	:	20180201 (Romil Patel)

Algorithm

The algorithm for the FFT will be implemented according with the following expression,

$$X_k = \frac{1}{\sqrt{N}} \sum_{n=0}^{N-1} x_n e^{-i2\pi kn/N} \quad 0 \leq k \leq N-1 \quad (9.1)$$

Similarly, for IFFT,

$$x_n = \frac{1}{\sqrt{N}} \sum_{k=0}^{N-1} X_k e^{i2\pi kn/N} \quad 0 \leq k \leq N-1 \quad (9.2)$$

From equations 9.1 and 9.2, we can write only one script for the implementations of the direct and inverse Discrete Fourier Transfer and manipulate its functionality as a FFT or IFFT by applying an appropriate input arguments. The generalized form for the algorithm can be given as,

$$y = \frac{1}{\sqrt{N}} \sum_{n=0}^{N-1} x e^{mi2\pi kn/N} \quad 0 \leq k \leq N-1 \quad (9.3)$$

where, x is an input complex signal, y is the output complex signal and m equals -1 or 1 for FFT and IFFT, respectively.

Function description

To perform FFT operation, the fft_*.h header file must be included and the input argument to the function can be given as follows,

$$y = fft(x, -1)$$

or

$$y = fft(x)$$

where x and y are of the C++ type `vector<complex>`. In a similar way, IFFT can be manipulated as,

$$x = fft(y, 1)$$

or

$$x = ifft(y)$$

Flowchart

The figure 9.1 displays top level architecture of the FFT algorithm. If the length of the input signal is 2^N , it'll execute Radix-2 algorithm otherwise it'll execute Bluestein algorithm [2]. The computational complexity of Radix-2 and Bluestein algorithm is $O(N \log_2 N)$, however, the computation of Bluestein algorithm involves the circular convolution which increases the number of computations. Therefore, to reduce the computational time it is advisable to work with the vectors of length 2^N [3].

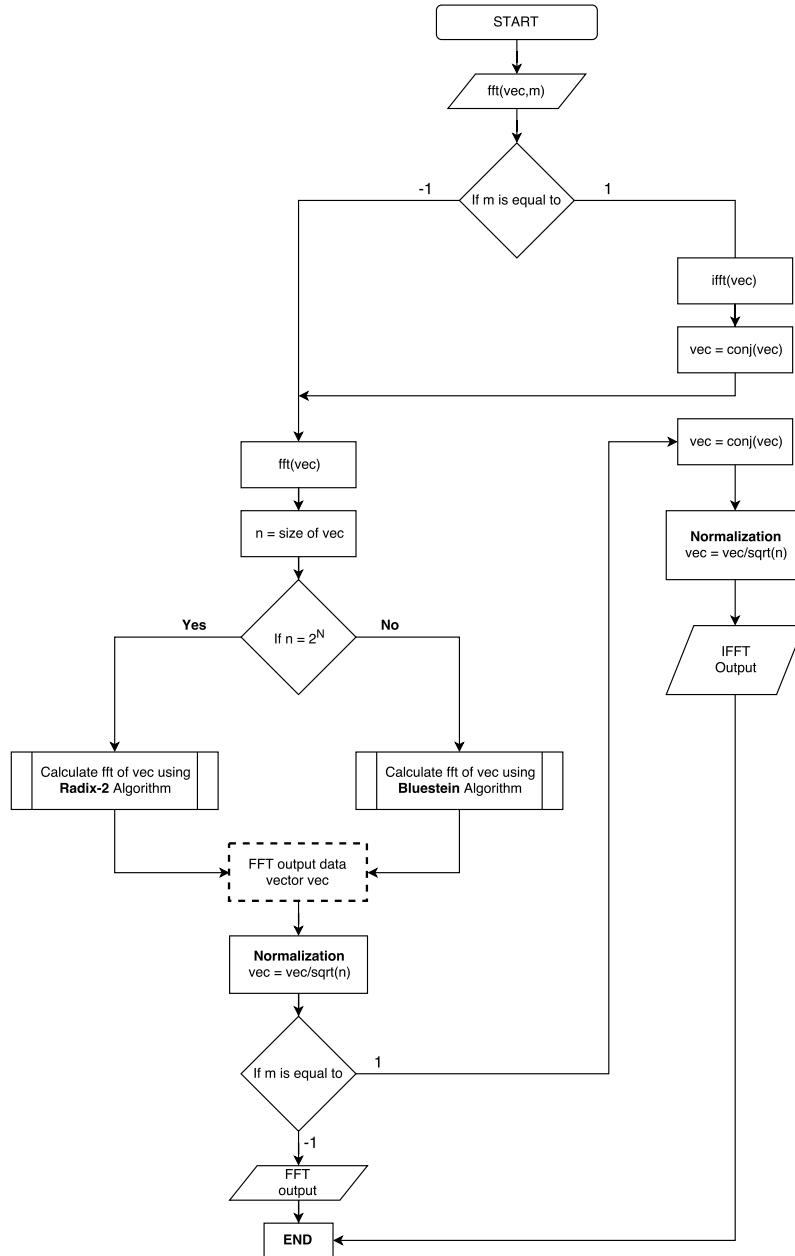


Figure 9.1: Top level architecture of FFT algorithm

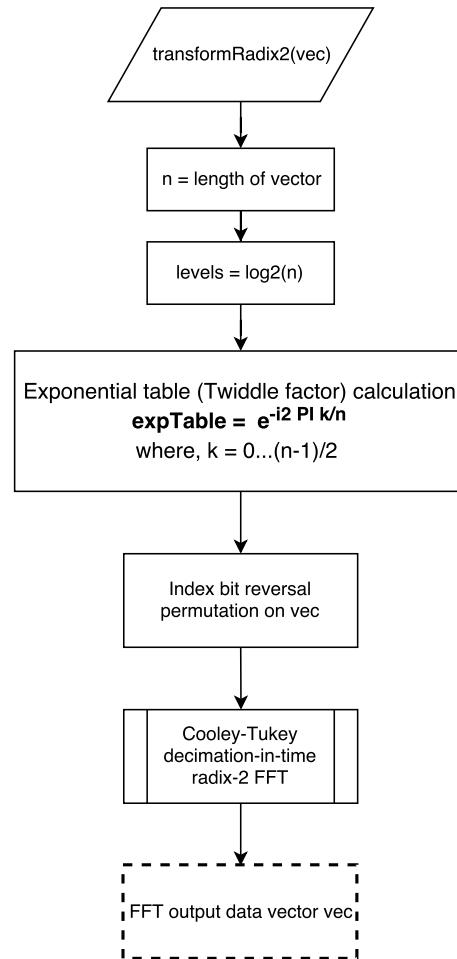
Radix-2 algorithm

Figure 9.2: Radix-2 algorithm

Cooley-Tukey algorithm

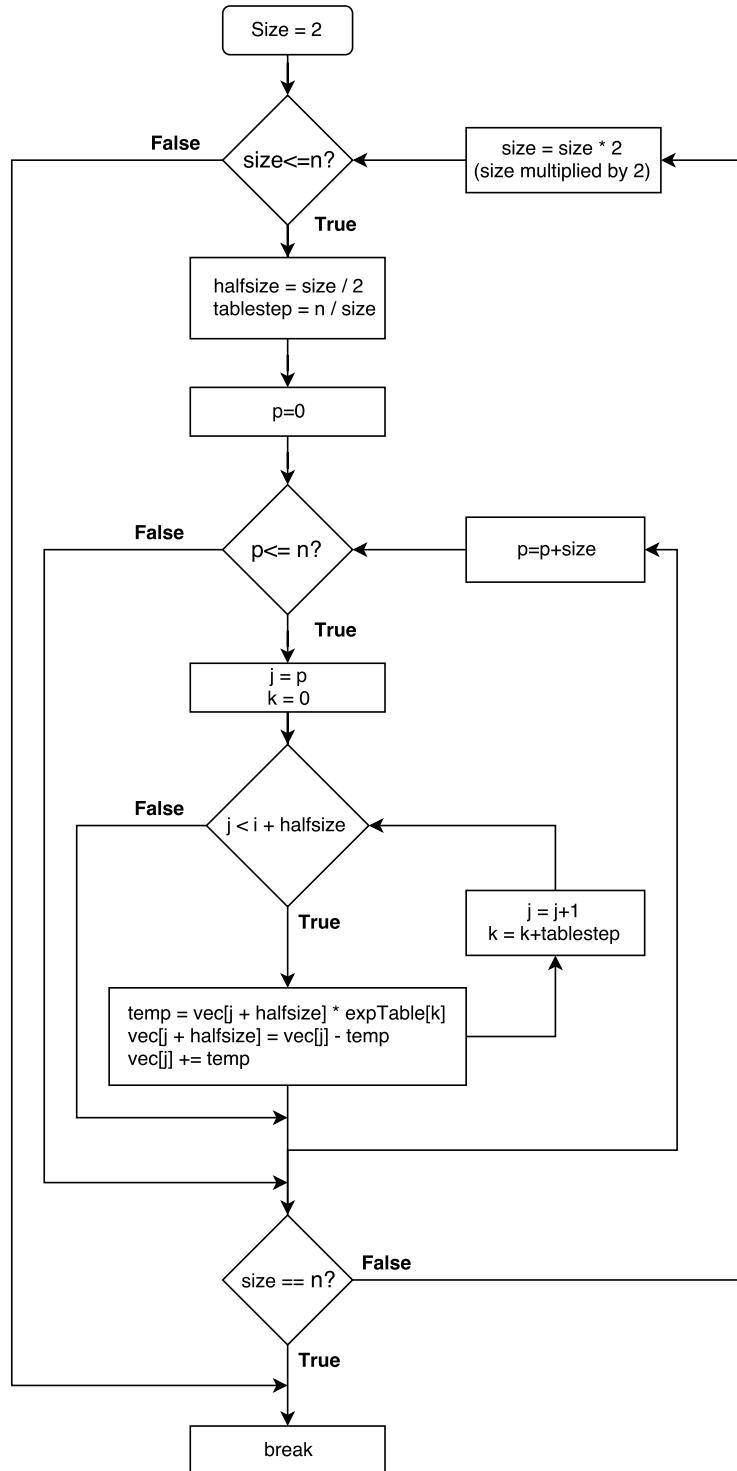


Figure 9.3: Cooley-Tukey algorithm

Bluestein algorithm

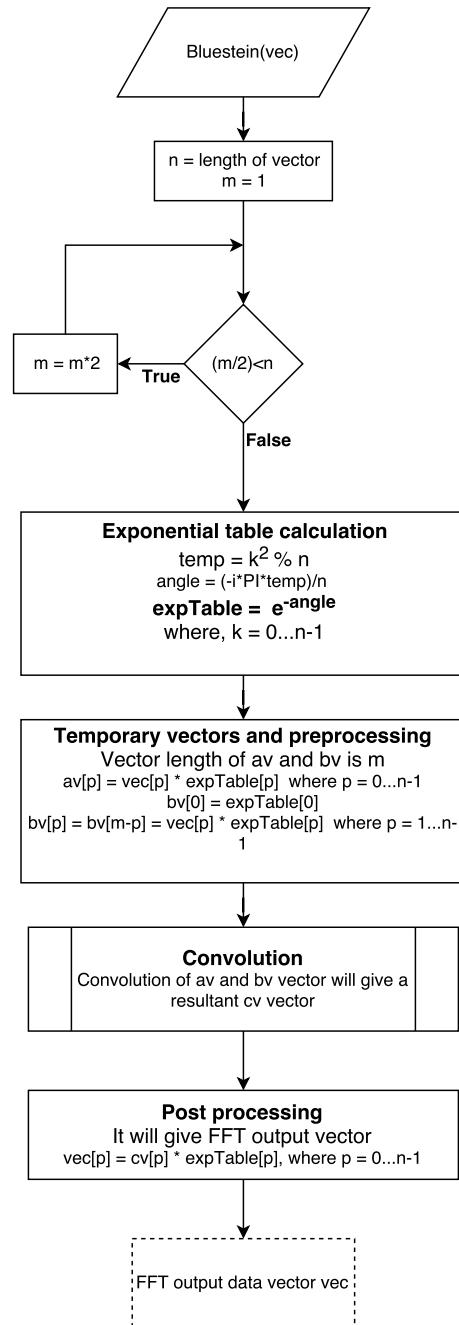


Figure 9.4: Bluestein algorithm

Convolution algorithm

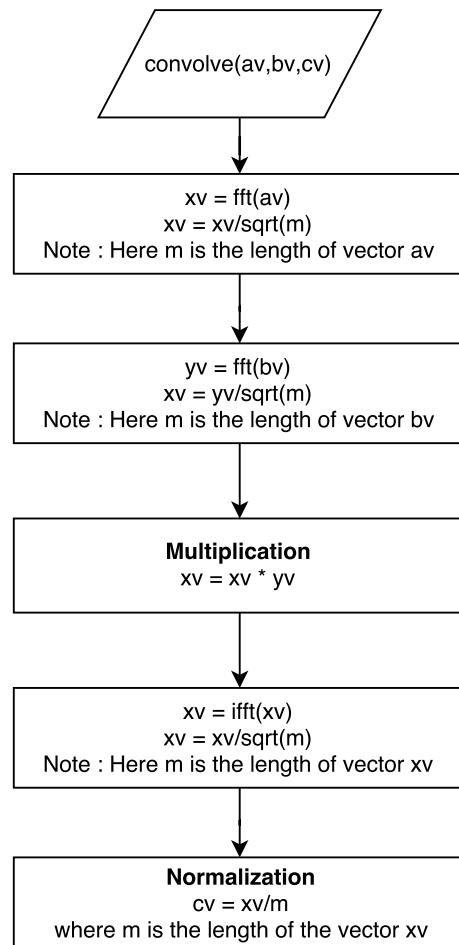


Figure 9.5: Circular convolution algorithm

Test example

This sections explains the steps to compare our C++ FFT program with the MATLAB FFT program.

Step 1 : Open the **fft_test** folder by following the path "/algorithms/fft/fft_test".

Step 2 : Find the **fft_test.m** file and open it.

This **fft_test.m** consists of two sections; section 1 generates the time domain signal and save it in the form of the text file with the name *time_function.txt* in the same folder. Section 2 reads the fft complex data generated by C++ program.

```

%
%%%%%%%%%%%%%%%
2 %%%%%%%% SECTION 1
%
%
4 clc
5 clear all
6 close all

8 Fs = 1e5;           % Sampling frequency
9 T = 1/Fs;           % Sampling period
10 L = 2^10;           % Length of signal
11 t = (0:L-1)*(5*T); % Time vector
12 f = linspace(-Fs/2,Fs/2,L);

14 %Choose for sig a value between [1, 7]
15 sig = 7;
16 switch sig
17     case 1
18         signal_title = 'Signal with one signusoid and random noise';
19         S = 0.7*sin(2*pi*50*t);
20         X = S + 2*randn(size(t));
21     case 2
22         signal_title = 'Sinusoids with Random Noise';
23         S = 0.7*sin(2*pi*50*t) + sin(2*pi*120*t);
24         X = S + 2*randn(size(t));
25     case 3
26         signal_title = 'Single sinusoids';
27         X = sin(2*pi*t);
28     case 4
29         signal_title = 'Summation of two sinusoids';
30         X = sin(2*pi*t) + cos(2*pi*t);
31     case 5
32         signal_title = 'Single Sinusoids with Exponent';

```

```

34 X = sin(2*pi*10*t).*exp(-abs(t));
35
36 case 6
37     signal_title = 'Mixed signal 1';
38     X = sin(2*pi*10*t).*exp(-t)+sin(2*pi*t)+7*sin(2*pi+5*t)+7*cos(2*pi+20*t)+5*sin(2*pi+50*t);
39 case 7
40     signal_title = 'Mixed signal 2';
41     X = 2*sin(2*pi*100*t).*exp(-t)+2.5*sin(2*pi+250*t)+sin(2*pi+50*t).*cos(2*pi+20*t)+1.5*sin(2*pi+50*t).*sin(2*pi+150*t);
42 end
43
44 plot(t(1:end),X(1:end))
45 title ( signal_title )
46 axis([ min(t) max(t) 1.1*min(X) 1.1*max(X)]);
47 xlabel('t (Seconds)')
48 ylabel('X(t)')
49
50 % dlmwrite will generate text file which represents the time domain signal.
51 % dlmwrite('time_function.txt', X, 'delimiter','\t');
52 fid=fopen('time_function.txt','w');
53 b=fprintf(fid ,'%0.15f\n',X); % 15-Digit accuracy
54 fclose (fid);
55
56 tic
57 fy =fft(X);
58 toc
59 fy = fftshift (fy);
60 figure(2);
61 subplot(2,1,1)
62 plot(f,abs(fy));
63 axis([-Fs/(2*5) Fs/(2*5) 0 1.1*max(abs(fy))]);
64 xlabel('f');
65 ylabel('|Y(f)|');
66 title ('MATLAB program Calculation : Magnitude');
67
68 subplot(2,1,2)
69 plot(f,phase(fy));
70 xlim([-Fs/(2*5) Fs/(2*5)]);
71 xlabel('f');
72 ylabel('phase(Y(f))');
73 title ('MATLAB program Calculation : Phase');
74
75 %%%
76 %
77 %%%%%%%% SECTION 2
78 %
79 %
80 %%%%%%%% Read C++ transformed data file
81 fullData = load('frequency_function.txt');

```

```

A=1;
80 B=A+1;
l=1;
82 Z=zeros(length(fullData)/2,1);
while (l<=length(Z))
84 Z(l) = fullData(A)+fullData(B)*1i;
A = A+2;
86 B = B+2;
l=l+1;
88 end

90 % % Comparsion of the MATLAB and C++ fft calculation.
91 figure;
92 subplot(2,1,1)
93 plot(f,abs( fftshift ( fft (X))) )
94 hold on
95 %Multiplied by sqrt(n) to verify our C++ code with MATLAB implemenrtation.
96 %plot(f,(sqrt(length(Z))*abs( fftshift (Z))), '---o')
97 plot(f,abs( fftshift (Z)), '---o') % fftOptimized
98 axis([-Fs/(2*5) Fs/(2*5) 0 1.1*max(abs(fy))]);
99 xlabel('f');
100 title ('Main reference for Magnitude')
101 legend('MATLAB','C++')

102 subplot(2,1,2)
103 plot(f,phase( fftshift ( fft (X))) )
104 hold on
105 plot(f,phase( fftshift (Z)), '---o')
106 xlim([-Fs/(2*5) Fs/(2*5)])
107 title ('Main reference for Phase')
108 xlabel('f');
109 legend('MATLAB','C++')
110 %
111 % % IFFT test comparision Plot
112 % figure; plot(X); hold on; plot( real(Z),'---o');

```

Listing 9.1: fft_test.m code

Step 3 : Choose for sig a value between [1, 7] and run the first section namely **section 1** by pressing "ctrl+Enter".

This will generate a *time_function.txt* file in the same folder which contains the time domain signal data.

Step 4 : Now, find the **fft_test.vcxproj** file in the same folder and open it.

In this project file, find *fft_test.cpp* and click on it. This file is an example of FFT calculation using C++ program. Basically this *fft_test.cpp* file consists of four sections:

Section 1. Read the input text file (import "time_function.txt" data file)

Section 2. It calculates FFT.

Section 3. Save FFT calculated data (export *frequency_function.txt* data file).

Section 4. Displays in the screen the FFT calculated data and length of the data.


```

51 //////////////////////////////////////////////////////////////////
53 vector <complex<double>> inTimeDomainComplex(inTimeDomain.size());
54 vector <complex<double>> fourierTransformed;
55 vector <double> re(inTimeDomain.size());
56 vector <double> im(inTimeDomain.size());
57
58 for (unsigned int i = 0; i < inTimeDomain.size(); i++)
59 {
60     re[i] = inTimeDomain[i]; // Real data of the signal
61 }
62
63 // Next, Real and Imaginary vector to complex vector conversion
64 inTimeDomainComplex = reImVect2ComplexVector(re, im);
65
66 // calculate FFT
67 clock_t begin = clock();
68 fourierTransformed = fft(inTimeDomainComplex, -1, 1); // Optimized
69 clock_t end = clock();
70 double elapsed_secs = double(end - begin) / CLOCKS_PER_SEC;
71
72 ////////////////////////////////////////////////////////////////// Section 3 //////////////////////////////////////////////////////////////////
73 ////////////////////////////////////////////////////////////////// Save FFT calculated data (export "frequency_function.txt" ) //////////////////////////////////////////////////////////////////
74 //////////////////////////////////////////////////////////////////
75 ofstream outFile;
76 complex<double> outFileData;
77 outFile.open("frequency_function.txt");
78 outFile.precision(15);
79 for (unsigned int i = 0; i < fourierTransformed.size(); i++){
80     outFile << fourierTransformed[i].real() << endl;
81     outFile << fourierTransformed[i].imag() << endl;
82 }
83 outFile.close();
84
85 ////////////////////////////////////////////////////////////////// Section 4 //////////////////////////////////////////////////////////////////
86 ////////////////////////////////////////////////////////////////// Display Section //////////////////////////////////////////////////////////////////
87 //////////////////////////////////////////////////////////////////
88 for (unsigned int i = 0; i < fourierTransformed.size(); i++){
89     cout << fourierTransformed[i] << endl; // Display all FFT calculated data
90 }
91
92 // Display length of data
93 cout << "\n\nTime elapsed to calculate FFT : " << elapsed_secs << " seconds" << endl;
94 cout << "\nTotal length of of data :" << count << endl;
95
96 getchar();
97 return 0;
98 }

```

Listing 9.2: fft_test.cpp code

Step 5 : Run the *fft_test.cpp* file.

This will generate a *frequency_function.txt* file in the same folder which contains the Fourier transformed data.

Step 6 : Now, go to the *fft_test.m* and run section 2 in the code by pressing "ctrl+Enter". The section 2 reads *frequency_function.txt* and compares both C++ and MATLAB calculation of Fourier transformed data.

Resultant analysis of various test signals

The following section will display the comparative analysis of MATLAB and C++ FFT program to calculate several type of signals.

1. Signal with two sinusoids and random noise

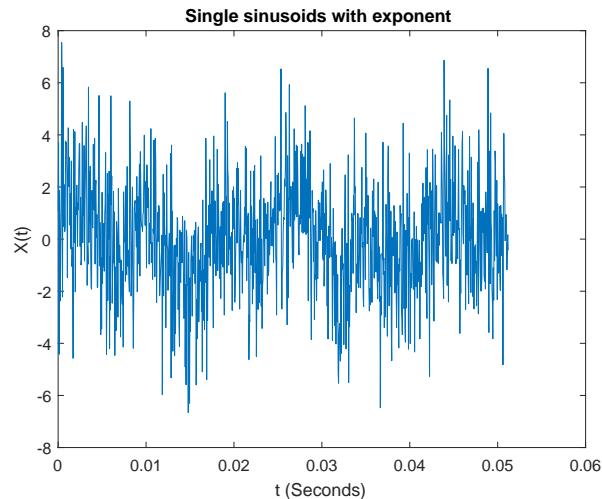


Figure 9.6: Random noise and two sinusoids

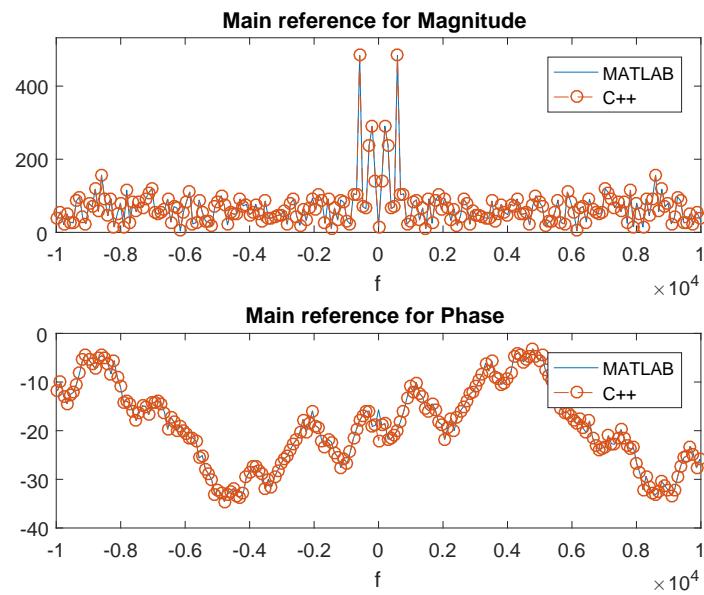


Figure 9.7: MATLAB and C++ comparison

2. Sinusoid with an exponent

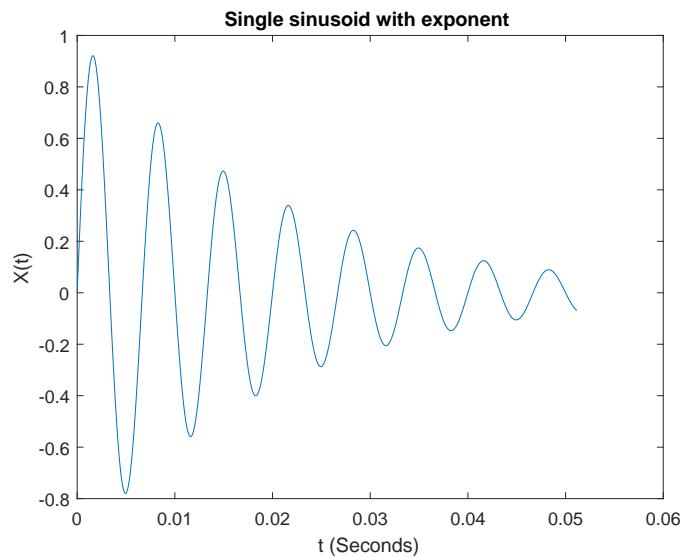


Figure 9.8: Sinusoids with exponent

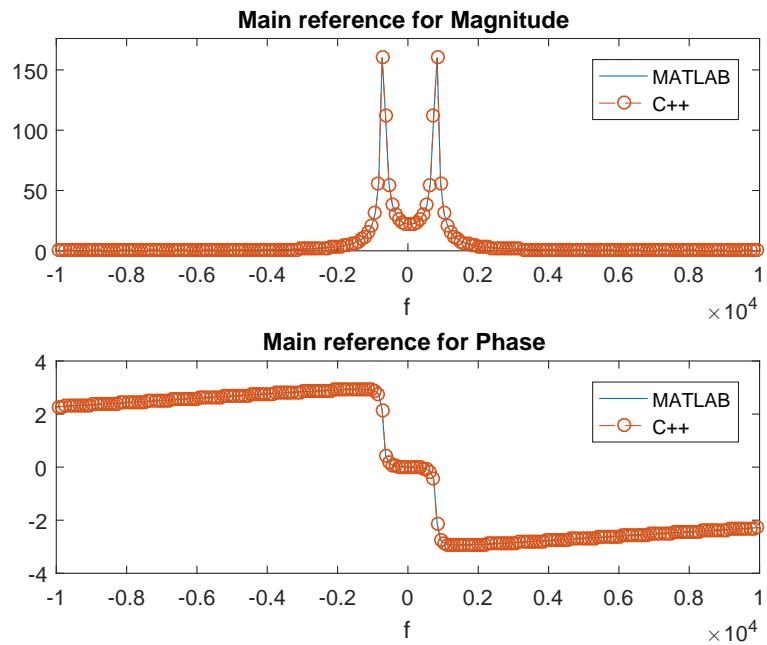


Figure 9.9: MATLAB and C++ comparison

3. Mixed signal

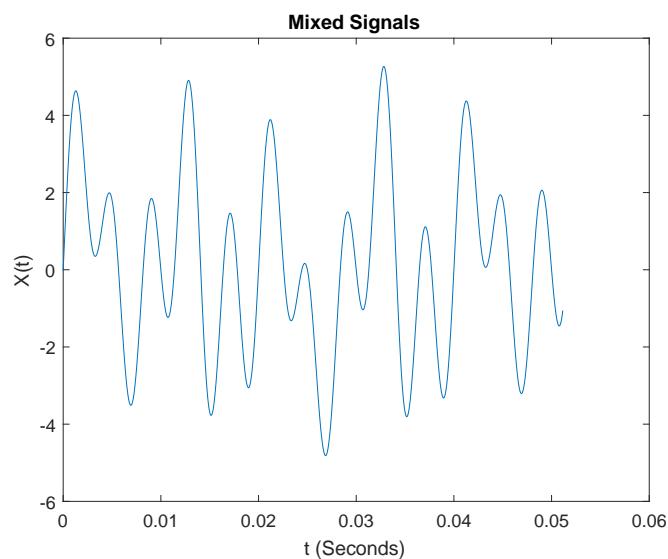


Figure 9.10: mixed signal

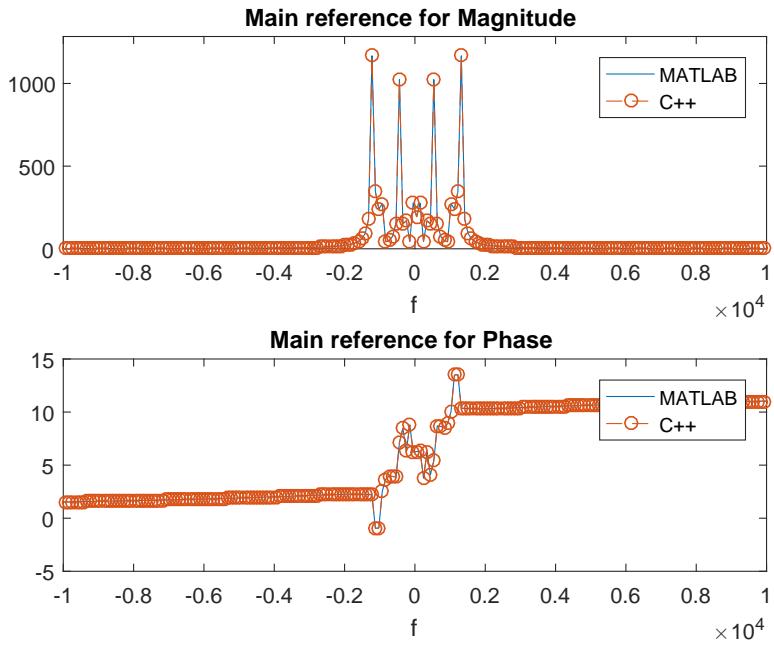


Figure 9.11: MATLAB and C++ comparison

Optimized FFT

Algorithm

The algorithm for the optimized FFT will be implemented according with the following expression,

$$X_k = \sum_{n=0}^{N-1} x_n e^{mi2\pi kn/N} \quad 0 \leq k \leq N-1 \quad (9.4)$$

Similarly, for IFFT,

$$x_n = \frac{1}{N} \sum_{k=0}^{N-1} X_k e^{mi2\pi kn/N} \quad 0 \leq k \leq N-1 \quad (9.5)$$

where, X_k is the Fourier transform of x_n , and m equals -1 or 1 for FFT and IFFT, respectively.

Function description

To perform optimized FFT operation, the `fft_*.h` header file must be included and the input argument to the function can be given as follows,

$$y = fft(x, -1, 1)$$

where x and y are of the C++ type `vector<complex>`. In a similar way, IFFT can be manipulated as,

$$x = fft(y, 1, 1)$$

If we manipulate the optimized FFT and IFFT functions as $y = fft(x, -1, 0)$ and $x = fft(y, 1, 0)$ then it'll calculate the FFT and IFFT as discussed in equation 9.1 and 9.2 respectively.

Comparative analysis

The following table displays the comparative analysis of time elapsed by FFT and optimized FFT for the various length of the data sequence.

Length of data	Time elapsed by Optimized FFT in second	Time elapsed by FFT in second
2^{10}	0.011	0.012
$2^{10} + 1$	0.174	0.179
2^{15}	0.46	0.56
$2^{15} + 1$	6.575	6.839
2^{18}	4.062	4.2729
$2^{18} + 1$	60.916	63.024
2^{20}	18.246	19.226
$2^{20} + 1$	267.932	275.642

Remarks

To write the data from the MATLAB in the form of text file, **fprintf** MATLAB function was used with the accuracy of the 15 digits. Similarly; to write the fft calculated data from the C++ in the form of text file, C++ **double** data type with precision of 15 digits applied to the object of **ofstream** class.

9.2 Overlap-Save Method

Header File	:	overlap_save_*.h
Source File	:	overlap_save_*.cpp
Version	:	20180201 (Romil Patel)

Overlap-save is an efficient way to evaluate the discrete convolution between a very long signal and a finite impulse response (FIR) filter. The overlap-save procedure cuts the signal into equal length segments with some overlap and then it performs convolution of each segment with the FIR filter. The overlap-save method can be computed in the following steps:

Step 1 : Determine the length M of impulse response, $h(n)$.

Step 2 : Define the size of FFT and IFFT operation, N . The value of N must greater than M and it should in the form $N = 2^k$ for the efficient implementation.

Step 3 : Determine the length L to section the input sequence $x(n)$, considering that $N = L + M - 1$.

Step 4 : Pad $L - 1$ zeros at the end of the impulse response $h(n)$ to obtain the length N .

Step 5 : Make the segments of the input sequences of length L , $x_i(n)$, where index i correspond to the i^{th} block. Overlap $M - 1$ samples of the previous block at the beginning of the segmented block to obtain a block of length N . In the first block, it is added $M - 1$ null samples.

Step 6 : Compute the circular convolution of segmented input sequence $x_i(n)$ and $h(n)$ described as,

$$y_i(n) = x_i(n) \circledast h(n). \quad (9.6)$$

This is obtained in the following steps:

1. Compute the FFT of x_i and h both with length N .
2. Compute the multiplication of $X_i(f)$ and the transfer function $H(f)$.
3. Compute the IFFT of the multiplication result to obtain the time-domain block signal, y_i .

Step 7 : Discarded $M - 1$ initial samples from the y_i , and save only the error-free $N - M - 1$ samples in the output record.

In the Figure 9.12 it is illustrated an example of overlap-save method.

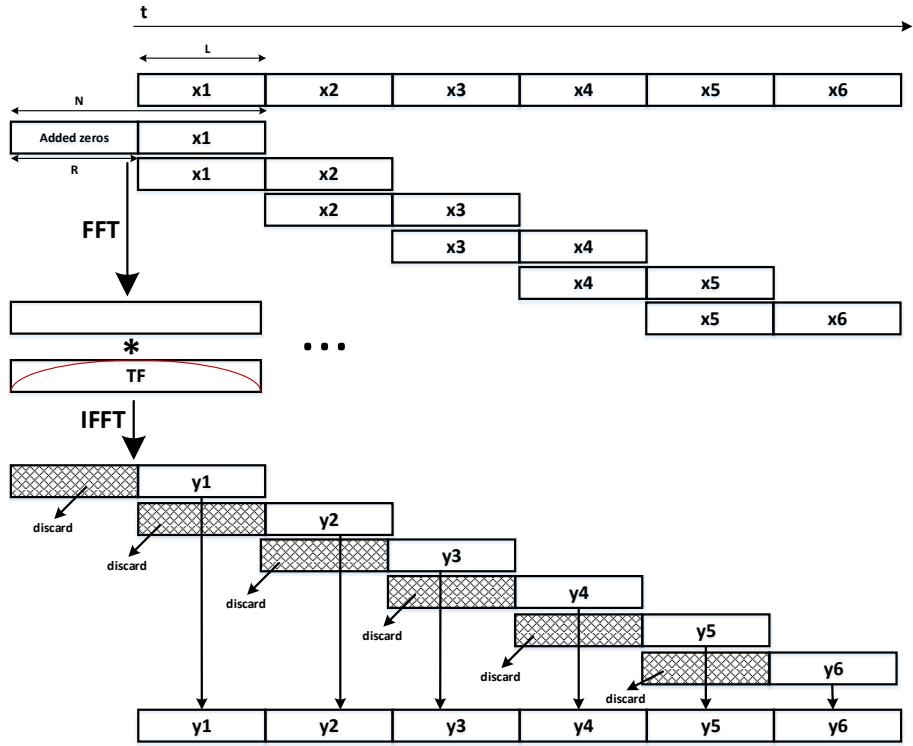


Figure 9.12: Illustration of Overlap-save method.

Function description

Traditionally, overlap-save method performs the convolution (More precisely, circular convolution) between discrete time-domain signal $x(n)$ and the filter impulse response $h(n)$. Here the length of the signal $x(n)$ is greater than the length of the filter $h(n)$. To perform convolution between the time domain signal $x(n)$ with the filter $h(n)$, include the header file `overlap_save_*.h` and then supply input argument to the function as follows,

$$y(n) = \text{overlapSave}(x(n), h(n))$$

Where, $x(n)$, $h(n)$ and $y(n)$ are of the C++ type `vector<complex<double>>` and the length of the signal $x(n)$ and filter $h(n)$ could be arbitrary.

The one noticeable thing in the traditional way of implementation of overlap-save is that it cannot work with the real-time system. Therefore, to make it usable in the real-time environment, one more `overlapSave` function with three input parameters was implemented and used along with the traditional overlap-save method. The structure of the new function is as follows,

$$y(n) = \text{overlapSave}(x_m(n), x_{m-1}(n), h(n))$$

Here, $x_m(n)$, $x_{m-1}(n)$ and $h(n)$ are of the C++ type `vector<complex<double>>` and the length of each of them are arbitrary. However, the combined length of $x_{m-1}(n)$ and $x_m(n)$ must be greater than the length of $h(n)$.

Linear and circular convolution

In the circular convolution, if we determine the length of the signal $x(n)$ is $N_1 = 8$ and length of the filter is $h(n)$ is $N_2 = 5$; then the length of the output signal is determined by $N = \max(N_1, N_2) = 8$. Next, the circular convolution can be performed after padding 0 in the filter $h(n)$ to make it's length equals N .

In the linear convolution, if we determine the length of the signal $x(n)$ is $N_1 = 8$ and length of the filter is $h(n)$ is $N_2 = 5$; then the length of the output signal is determined by $N = N_1 + N_2 - 1 = 12$. Next, the linear convolution using circular convolution can be performed after padding 0 in the signal $x(n)$ filter $h(n)$ to make it's length equals N .

Flowchart of real-time overlap-save method

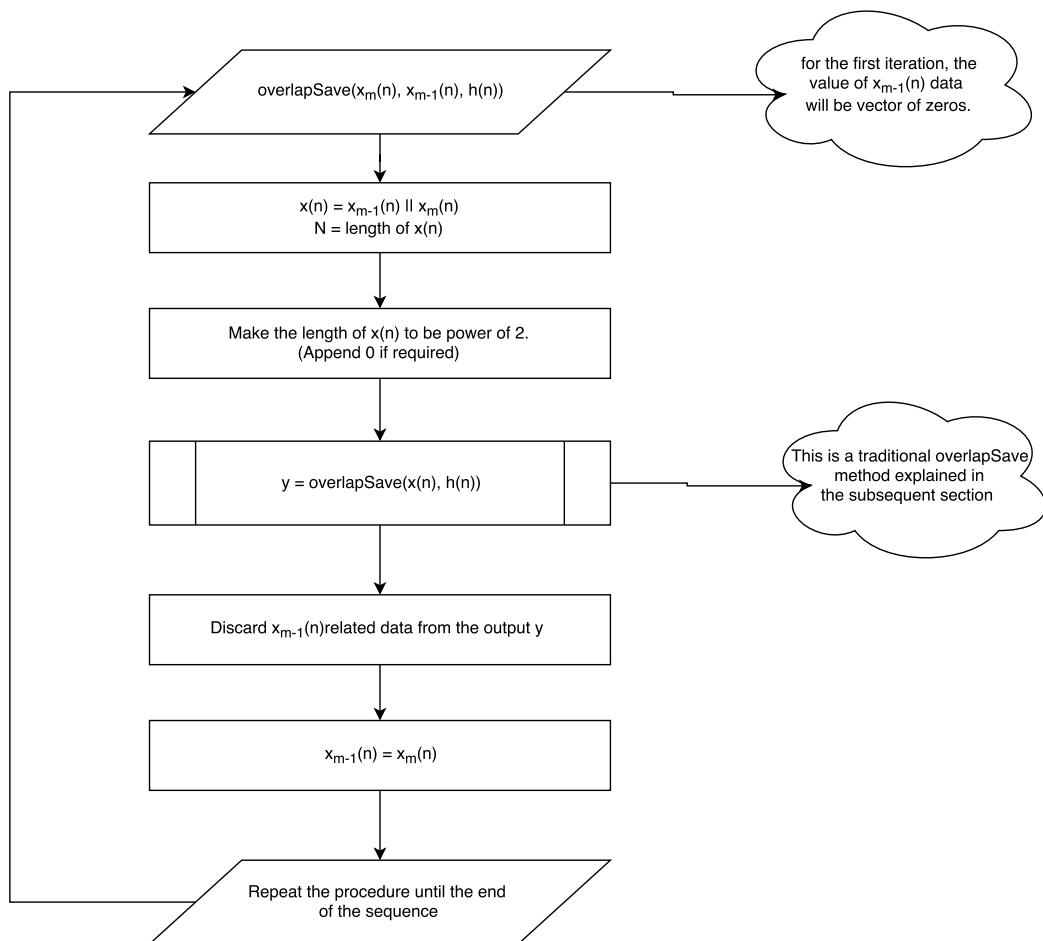


Figure 9.13: Flowchart for real-time overlap-save method

Flowchart of traditional overlap-save method

The following three flowcharts describe the logical flow of the traditional overlap-save method with two inputs as $overlapSave(x(n), h(n))$. In the flowchart, $x(n)$ and $h(n)$ are regarded as $inTimeDomainComplex$ and $inTimeDomainFilterComplex$ respectively.

1. Decide length of FFT, data block and filter

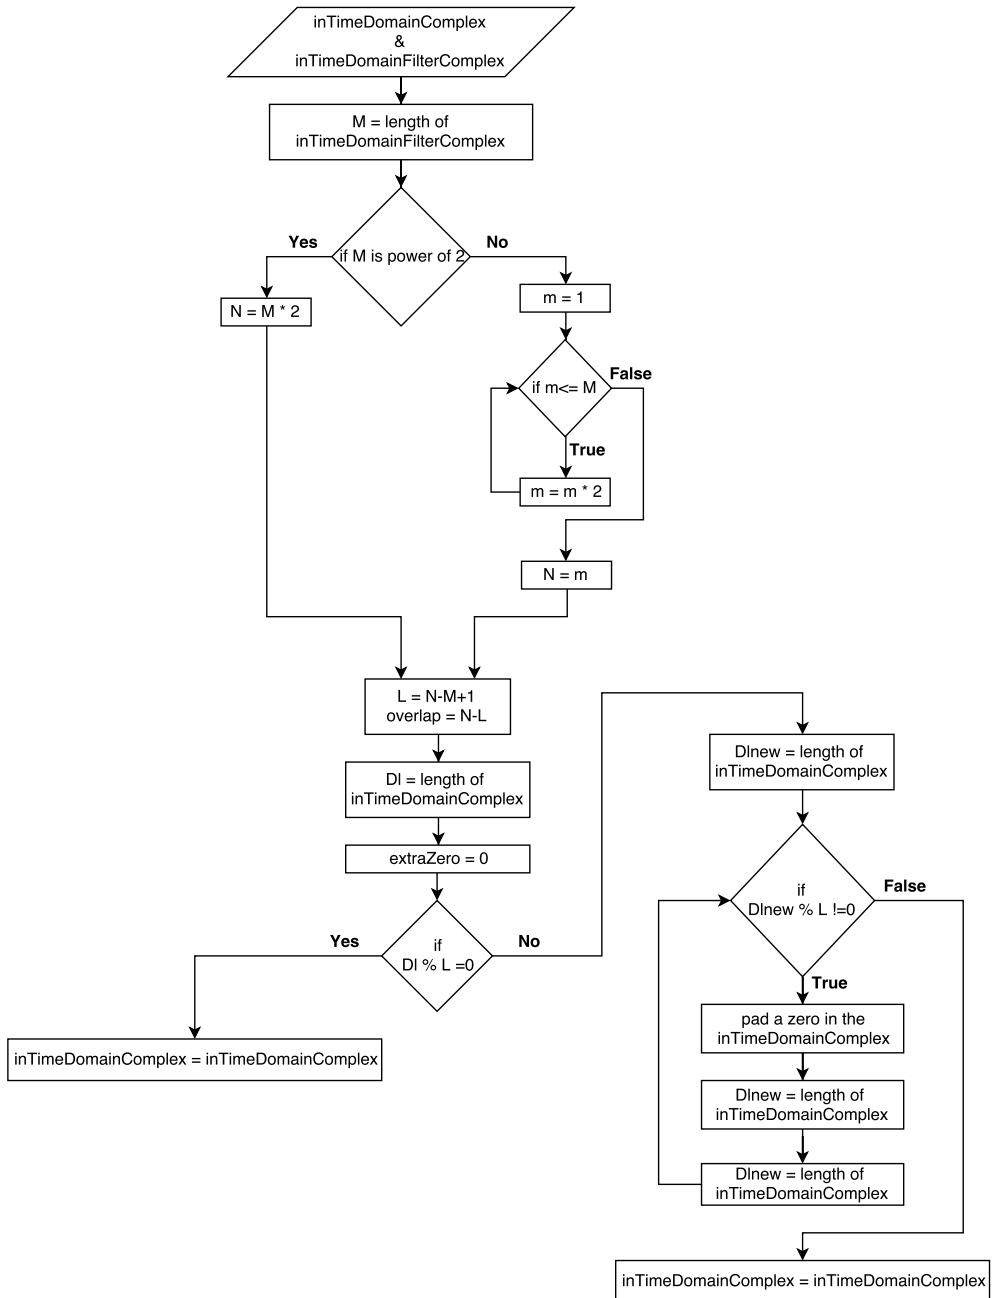


Figure 9.14: Flowchart for calculating length of FFT, data block and filter

2. Create matrix with overlap

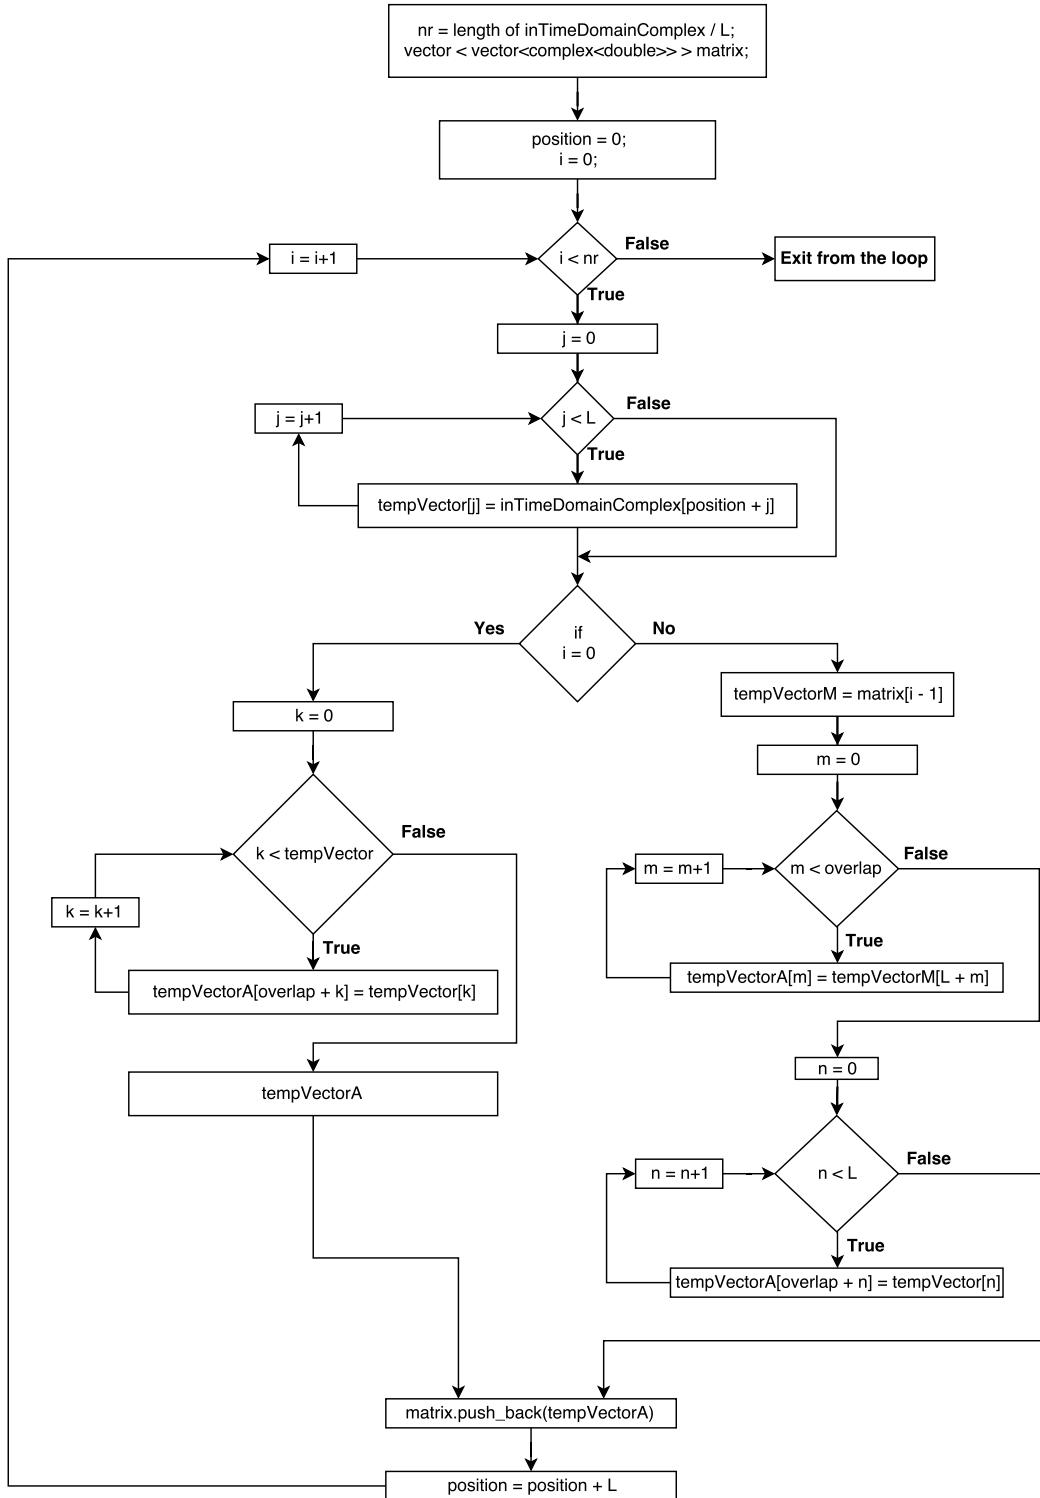


Figure 9.15: Flowchart of creating matrix with overlap

3. Convolution between filter and data blocks

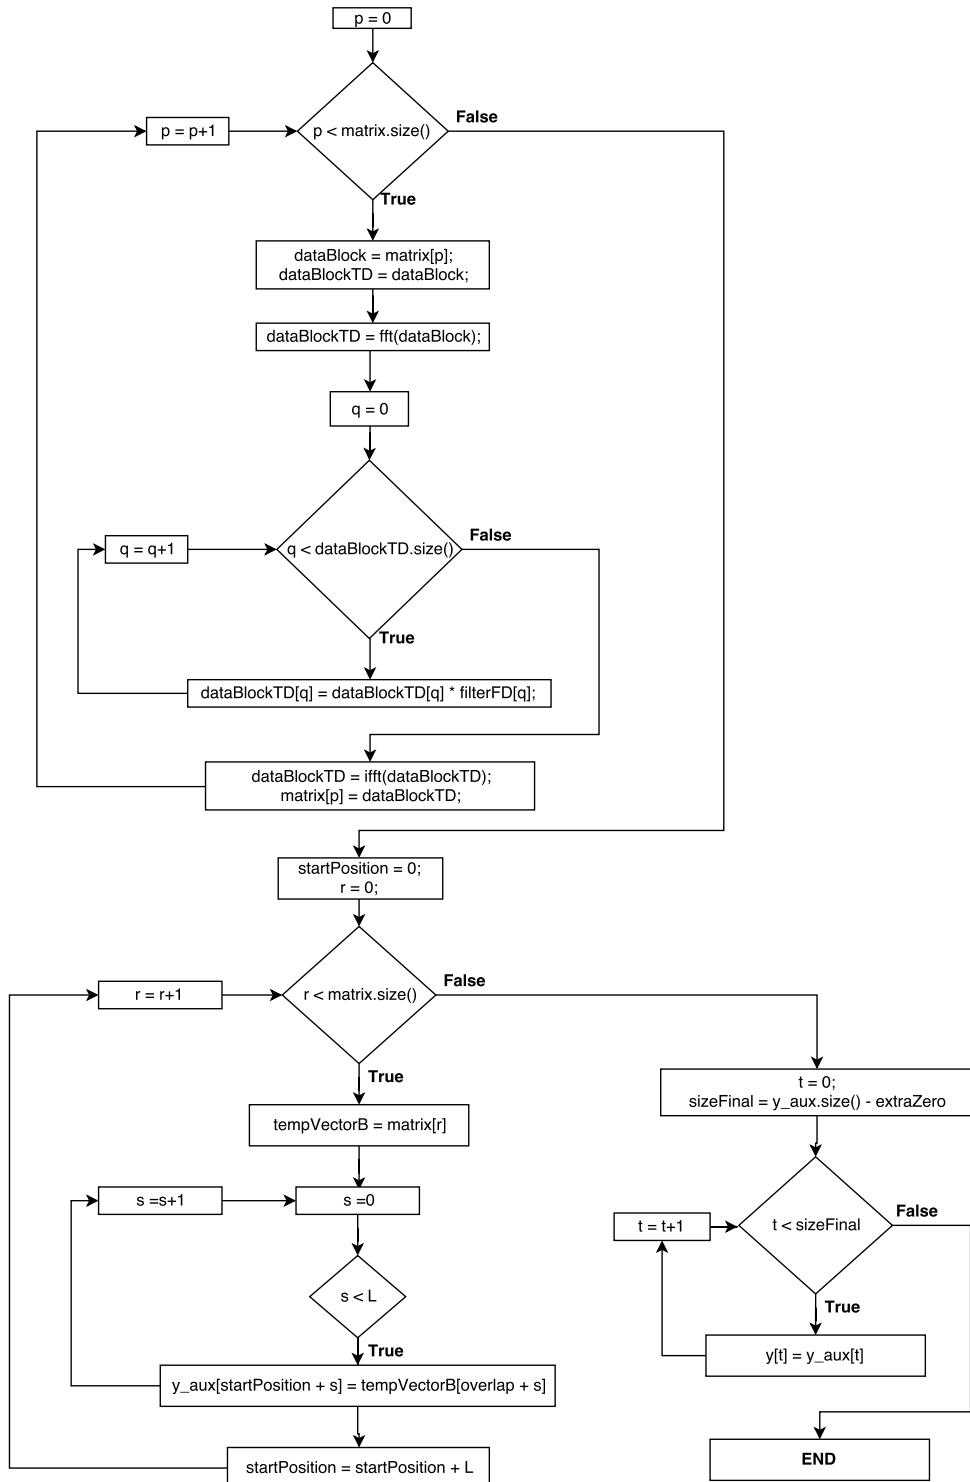


Figure 9.16: Flowchart of the convolution

Test example of traditional overlap-save function

This sections explains the steps of comparing our C++ based $overlapSave(x(n), h(n))$ function with the MATLAB overlap-save program and MATLAB's built-in `conv()` function.

Step 1 : Open the folder namely `overlapSave_test` by following the path "/algorithms/overlapSave/overlapSave_test".

Step 2 : Find the `overlapSave_test.m` file and open it.

This `overlapSave_test.m` consists of five sections:

section 1 : It generates the time domain signal and filter impulse response and save them in the form of the text file with the name of `time_domain_data.txt` and `time_domain_filter.txt` respectively in the same folder.

Section 2 : It calculates the length of FFT, data blocks and filter to perform convolution using overlap-save method.

Section 3 : It consists of overlap-save code which first converts the data into the form of matrix with 50% overlap and then performs circular convolution with filter.

Section 4 : It read `overlap_save_data.txt` data file generated by C++ program and compare with MATLAB implementation.

Section 5 : It compares our MATLAB and C++ implementation with the built-in MATLAB function `conv()`.

```

%
%%%%%%%%%%%%%%%
2 %%%%%%%%%%%%%%% SECTION 1
%
%
4 % generate signal and filter data and save it as a .txt file .
5 clc
6 clear all
7 close all
8
9 Fs = 1e5; % Sampling frequency
10 T = 1/Fs; % Sampling period
11 L = 2^12+45; % Length of signal
12 t = (0:L-1)*(5*T); % Time vector
13 f = linspace(-Fs/2,Fs/2,L);
14
15 %Choose for sig a value between [1, 7]
16 sig = 2;
17 switch sig
18     case 1
19         signal_title = 'Signal with one signusoid and random noise';
20         S = 0.7*sin(2*pi*50*t);

```

```

11 X = S + 2*randn(size(t));
12 case 2
13     signal_title = 'Sinusoids with Random Noise';
14     S = 0.7*sin(2*pi*50*t) + sin(2*pi*120*t);
15     X = S + 2*randn(size(t));
16 case 3
17     signal_title = 'Single sinusoids';
18     X = sin(2*pi*t);
19 case 4
20     signal_title = 'Summation of two sinusoids';
21     X = sin(2*pi*1205*t) + cos(2*pi*1750*t);
22 case 5
23     signal_title = 'Single Sinusoids with Exponent';
24     X = sin(2*pi*250*t).*exp(-12*abs(t));
25 case 6
26     signal_title = 'Mixed signal 1';
27     X = sin(2*pi*10*t).*exp(-t)+sin(2*pi*t)+7*sin(2*pi*+5*t)+7*cos(2*pi*+20*t)+5*sin(2*pi*+50*t);
28 case 7
29     signal_title = 'Mixed signal 2';
30     X = 2*sin(2*pi*100*t).*exp(-t)+2.5*sin(2*pi*+250*t)+sin(2*pi*+50*t).*cos(2*pi*+20*t)+1.5*sin(2*pi*+50*t).*sin(2*pi*+150*t);
31 end
32
33 Xref = X;
34 % dlmwrite will generate text file which represents the time domain signal.
35 %dlmwrite('time_domain_data.txt',X,'delimiter','\t');
36 fid=fopen('time_domain_data.txt','w');
37 fprintf(fid,'%.20f\n',X); % 12-Digit accuracy
38 fclose(fid);
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
579
580
581
582
583
584
585
586
587
588
589
589
590
591
592
593
594
595
596
597
598
599
599
600
601
602
603
604
605
606
607
608
609
609
610
611
612
613
614
615
616
617
618
619
619
620
621
622
623
624
625
626
627
628
629
629
630
631
632
633
634
635
636
637
638
639
639
640
641
642
643
644
645
646
647
648
649
649
650
651
652
653
654
655
656
657
658
659
659
660
661
662
663
664
665
666
667
668
669
669
670
671
672
673
674
675
676
677
678
679
679
680
681
682
683
684
685
686
687
687
688
689
689
690
691
692
693
694
695
696
697
697
698
699
699
700
701
702
703
704
705
706
707
708
709
709
710
711
712
713
714
715
716
717
718
719
719
720
721
722
723
724
725
726
727
728
729
729
730
731
732
733
734
735
736
737
738
739
739
740
741
742
743
744
745
746
747
748
749
749
750
751
752
753
754
755
756
757
758
759
759
760
761
762
763
764
765
766
767
768
769
769
770
771
772
773
774
775
776
777
778
778
779
779
780
781
782
783
784
785
786
787
787
788
789
789
790
791
792
793
794
795
796
796
797
798
799
799
800
801
802
803
804
805
806
807
808
809
809
810
811
812
813
814
815
816
817
817
818
819
819
820
821
822
823
824
825
826
827
827
828
829
829
830
831
832
833
834
835
836
837
837
838
839
839
840
841
842
843
844
845
846
846
847
848
848
849
849
850
851
852
853
854
855
856
856
857
858
858
859
859
860
861
862
863
864
865
865
866
867
867
868
868
869
869
870
871
872
873
874
875
875
876
876
877
877
878
878
879
879
880
881
882
883
884
885
885
886
886
887
887
888
888
889
889
890
891
892
893
893
894
894
895
895
896
896
897
897
898
898
899
899
900
901
902
903
903
904
904
905
905
906
906
907
907
908
908
909
909
910
910
911
911
912
912
913
913
914
914
915
915
916
916
917
917
918
918
919
919
920
920
921
921
922
922
923
923
924
924
925
925
926
926
927
927
928
928
929
929
930
930
931
931
932
932
933
933
934
934
935
935
936
936
937
937
938
938
939
939
940
940
941
941
942
942
943
943
944
944
945
945
946
946
947
947
948
948
949
949
950
950
951
951
952
952
953
953
954
954
955
955
956
956
957
957
958
958
959
959
960
960
961
961
962
962
963
963
964
964
965
965
966
966
967
967
968
968
969
969
970
970
971
971
972
972
973
973
974
974
975
975
976
976
977
977
978
978
979
979
980
980
981
981
982
982
983
983
984
984
985
985
986
986
987
987
988
988
989
989
990
990
991
991
992
992
993
993
994
994
995
995
996
996
997
997
998
998
999
999
1000
1000
1001
1001
1002
1002
1003
1003
1004
1004
1005
1005
1006
1006
1007
1007
1008
1008
1009
1009
1010
1010
1011
1011
1012
1012
1013
1013
1014
1014
1015
1015
1016
1016
1017
1017
1018
1018
1019
1019
1020
1020
1021
1021
1022
1022
1023
1023
1024
1024
1025
1025
1026
1026
1027
1027
1028
1028
1029
1029
1030
1030
1031
1031
1032
1032
1033
1033
1034
1034
1035
1035
1036
1036
1037
1037
1038
1038
1039
1039
1040
1040
1041
1041
1042
1042
1043
1043
1044
1044
1045
1045
1046
1046
1047
1047
1048
1048
1049
1049
1050
1050
1051
1051
1052
1052
1053
1053
1054
1054
1055
1055
1056
1056
1057
1057
1058
1058
1059
1059
1060
1060
1061
1061
1062
1062
1063
1063
1064
1064
1065
1065
1066
1066
1067
1067
1068
1068
1069
1069
1070
1070
1071
1071
1072
1072
1073
1073
1074
1074
1075
1075
1076
1076
1077
1077
1078
1078
1079
1079
1080
1080
1081
1081
1082
1082
1083
1083
1084
1084
1085
1085
1086
1086
1087
1087
1088
1088
1089
1089
1090
1090
1091
1091
1092
1092
1093
1093
1094
1094
1095
1095
1096
1096
1097
1097
1098
1098
1099
1099
1100
1100
1101
1101
1102
1102
1103
1103
1104
1104
1105
1105
1106
1106
1107
1107
1108
1108
1109
1109
1110
1110
1111
1111
1112
1112
1113
1113
1114
1114
1115
1115
1116
1116
1117
1117
1118
1118
1119
1119
1120
1120
1121
1121
1122
1122
1123
1123
1124
1124
1125
1125
1126
1126
1127
1127
1128
1128
1129
1129
1130
1130
1131
1131
1132
1132
1133
1133
1134
1134
1135
1135
1136
1136
1137
1137
1138
1138
1139
1139
1140
1140
1141
1141
1142
1142
1143
1143
1144
1144
1145
1145
1146
1146
1147
1147
1148
1148
1149
1149
1150
1150
1151
1151
1152
1152
1153
1153
1154
1154
1155
1155
1156
1156
1157
1157
1158
1158
1159
1159
1160
1160
1161
1161
1162
1162
1163
1163
1164
1164
1165
1165
1166
1166
1167
1167
1168
1168
1169
1169
1170
1170
1171
1171
1172
1172
1173
1173
1174
1174
1175
1175
1176
1176
1177
1177
1178
1178
1179
1179
1180
1180
1181
1181
1182
1182
1183
1183
1184
1184
1185
1185
1186
1186
1187
1187
1188
1188
1189
1189
1190
1190
1191
1191
1192
1192
1193
1193
1194
1194
1195
1195
1196
1196
1197
1197
1198
1198
1199
1199
1200
1200
1201
1201
1202
1202
1203
1203
1204
1204
1205
1205
1206
1206
1207
1207
1208
1208
1209
1209
1210
1210
1211
1211
1212
1212
1213
1213
1214
1214
1215
1215
1216
1216
1217
1217
1218
1218
1219
1219
1220
1220
1221
1221
1222
1222
1223
1223
1224
1224
1225
1225
1226
1226
1227
1227
1228
1228
1229
1229
1230
1230
1231
1231
1232
1232
1233
1233
1234
1234
1235
1235
1236
1236
1237
1237
1238
1238
1239
1239
1240
1240
1241
1241
1242
1242
1243
1243
1244
1244
1245
1245
1246
1246
1247
1247
1248
1248
1249
1249
1250
1250
1251
1251
1252
1252
1253
1253
1254
1254
1255
1255
1256
1256
1257
1257
1258
1258
1259
1259
1260
1260
1261
1261
1262
1262
1263
1263
1264
1264
1265
1265
1266
1266
1267
1267
1268
1268
1269
1269
1270
1270
1271
1271
1272
1272
1273
1273
1274
1274
1275
1275
1276
1276
1277
1277
1278
1278
1279
1279
1280
1280
1281
1281
1282
1282
1283
1283
1284
1284
1285
1285
1286
1286
1287
1287
1288
1288
1289
1289
1290
1290
1291
1291
1292
1292
1293
1293
1294
1294
1295
1295
1296
1296
1297
1297
1298
1298
1299
1299
1300
1300
1301
1301
1302
1302
1303
1303
1304
1304
1305
1305
1306
1306
1307
1307
1308
1308
1309
1309
1310
1310
1311
1311
1312
1312
1313
1313
1314
1314
1315
1315
1316
1316
1317
1317
1318
1318
1319
1319
1320
1320
1321
1321
1322
1322
1323
1323
1324
1324
1325
1325
1326
1326
1327
1327
1328
1328
1329
1329
1330
1330
1331
1331
1332
1332
1333
1333
1334
1334
1335
1335
1336
1336
1337
1337
1338
1338
1339
1339
1340
1340
1341
1341
1342
1342
1343
1343
1344
1344
1345
1345
1346
1346
1347
1347
1348
1348
1349
1349
1350
1350
1351
1351
1352
1352
1353
1353
1354
1354
1355
1355
1356
1356
1357
1357
1358
1358
1359
1359
1360
1360
1361
1361
1362
1362
1363
1363
1364
1364
1365
1365
1366
1366
1367
1367
1368
1368
1369
1369
1370
1370
1371
1371
1372
1372
1373
1373
1374
1374
1375
1375
1376
1376
1377
1377
1378
1378
1379
1379
1380
1380
1381
1381
1382
1382
1383
1383
1384
1384
1385
1385
1386
1386
1387
1387
1388
1388
1389
1389
1390
1390
1391
1391
1392
1392
1393
1393
1394
1394
1395
1395
1396
1396
1397
1397
1398
1398
1399
1399
1400
1400
1401
1401
1402
1402
1403
1403
1404
1404
1405
1405
1406
1406
1407
1407
1408
1408
1409
1409
1410
1410
1411
1411
1412
1412
1413
1413
1414
1414
1415
1415
1416
1416
1417
1417
1418
1418
1419
1419
1420
1420
1421
1421
1422
1422
1423
1423
1424
1424
1425
1425
1426
1426
1427
1427
1428
1428
1429
1429
1430
1430
1431
1431
1432
1432
1433
1433
1434
1434
1435
1435
1436
1436
1437
1437
1438
1438
1439
1439
1440
1440
1441
1441
1442
1442
1443
1443
1444
1444
1445
1445
1446
1446
1447
1447
1448
1448
1449
1449
1450
1450
1451
1451
1452
1452
1453
1453
1454
1454
1455
1455
1456
1456
1457
1457
1458
1458
1459
1459
1460
1460
1461
1461
1462
1462
1463
1463
1464
1464
1465
1465
1466
1466
1467
1467
1468
1468
1469
1469
1470
1470
1471
1471
1472
1472
1473
1473
1474
1474
1475
1475
1476
1476
1477
1477
1478
1478
1479
1479
1480
1480
1481
1481
1482
1482
1483
1483
1484
1484
1485
1485
1486
1486
1487
1487
1488
1488
1489
1489
1490
1490
1491
1491
1492
1492
1493
1493
1494
1494
1495
1495
1496
1496
1497
1497
1498
1498
1499
1499
1500
1500
1501
1501
1502
1502
1503
1503
1504
1504
1505
1505
1506
1506
1507
1507
1508
1508
1509
1509
1510
1510
1511
1511
1512
1512
1513
1513
1514
1514
1515
1515
1516
1516
1517
1517
1518
1518
1519
1519
1520
1520
1521
1521
1522
1522
1523
1523
1524
1524
1525
1525
1526
1526
1527
1527
1528
1528
1529
1529
1530
1530
1531
1531
1532
1532
1533
1533
1534
1534
1535
1535
1536
1536
1537
1537
1538
1538
1539
1539
1540
1540
1541
1541
1542
1542
1543
1543
1544
1544
1545
1545
1546
1546
1547
1547
1548
1548
1549
1549
1550
1550
1551
1551
1552
1552
1553
1553
1554
1554
1555
1555
1556
1556
1557
1557
1558
1558
1559
1559
1560
1560
1561
1561
1562
1562
1563
1563
1564
1564
1565
1565
1566
1566
1567
1567
1568
1568
1569
1569
1570
1570
1571
1571
1572
1572
1573
1573
1574
1574
1575
1575
1576
1576
1577
1577
1578
1578
1579
1579
1580
1580
1581
1581
1582
1582
1583
1583
1584
1584
1585
1585
1586
1586
1587
1587
1588
1588
1589
1589
1590
1590
1591
1591
1592
1592
1593
1593
1594
1594
1595
1595
1596
1596
1597
1597
1598
1598
1599
1599
1600
1600
1601
1601
1602
1602
1603
1603
1604
1604
1605
1605
1606
1606
1607
1607
1608
1608
1609
1609
1610
1610
1611
1611
1612
1612
1613
1613
1614
1614
1615
1615
1616
1616
1617
1617
1618
1618
1619
1619
162
```

```

72 subplot(211)
73 plot(t,X)
74 grid on
75 title ( signal_title )
76 axis([ min(t) max(t) 1.1*min(X) 1.1*max(X)]);
77 xlabel('t (Seconds)')
78 ylabel('X(t)')

80 subplot(212)
81 plot(h)
82 grid on
83 title ( filter_type )
84 axis([1 length(h) 1.1*min(h) 1.1*max(h)]);
85 xlabel('Samples')
86 ylabel('h(t)')

88 %%
89 %

%%%%%%%%%%%%%% SECTION 2
90 %

92 % Calculate the length of FFT, data blocks and filter
M = length(h);

94
if (bitand(M,M-1)==0)
    N = 2 * M; % Where N is the size of the FFT
else
    m =1;
    while(m<=M) % Next value of the order of power 2.
        m = m*2;
    end
    N = m;
end

104
L = N -M+1; % Size of data block (50% of overlap)
106 overlap = N - L; % size of overlap
Dl = length(X);
108 extraZeros = 0;
109 if (mod(Dl,L) == 0)
    X = X;
else
    Dlnew = length(X);
    while (mod(Dlnew,L) ~= 0)
        X = [X 0];
        Dlnew = length(X);
        extraZeros = extraZeros + 1;
    end
end
118

```

```

120 %%%
121 %
122 %%%%%% SECTION 3
123 %
124 % MATLAB approach of overlap-save method (First create matrix with
125 % overlap and then perform convolution)
126 zerosForFilter = zeros(1,N-M);
127 h1=[h zerosForFilter];
128 H1 = fft(h1);
129
130 x1=X;
131 nr=ceil((length(x1))/L);
132
133 tic
134 for k=1:nr
135     Ma(k,:)=x1(((k-1)*L+1):k*L);
136     if k==1
137         Ma1(k,:)=[zeros(1,overlap) Ma(k,:)];
138     else
139         tempVectorM = Ma1(k-1,:);
140         overlapData = tempVectorM(L+1:end);
141         Ma1(k,:)=[overlapData Ma(k,:)];
142     end
143     auxfft = fft(Ma1(k,:));
144     auxMult = auxfft.*H1;
145     Ma2(k,:)=ifft(auxMult);
146 end
147
148 Ma3=Ma2(:,N-L+1:end);
149 y1=Ma3';
150 y=y1(:)';
151 y = y(1:end - extraZeros);
152 toc
153 %%
154 %%%%%% SECTION 4
155 %
156 % Read overlap-save data file generated by C++ program and compare with
157 fullData = load('overlap_save_data.txt');
158 A=1;
159 B=A+1;
160 l=1;

```

```

162 Z=zeros(length(fullData)/2,1);
163 while (1<=length(Z))
164 Z(l) = fullData(A)+fullData(B)*1i;
165 A = A+2;
166 B = B+2;
167 l=l+1;
168 end
169
170 figure;
171 plot(t,real(y))
172 hold on
173 plot(t,real(Z),'o')
174 axis([min(t) max(t) 1.1*min(y) 1.1*max(y)]);
175 title ('Comparision of overlapSave method of MATLAB and C++ ')
176 legend('MATLAB overlapSave','C++ overlapSave')
177 %%
178 %%
179 %% SECTION 5
180 %% Our MATLAB and C++ implementation test with the built-in conv function of
181 %% MATLAB.
182 tic
183 P = conv(Xref,h);
184 toc
185 figure
186 plot(t, P(1:size(Z,1)), 'r')
187 hold on
188 plot(t,real(Z),'o')
189 title ('Comparision of MATLAB function conv() and overlaSave')
190 axis([min(t) max(t) 1.1*min(real(Z)) 1.1*max(real(Z))]);
191 xlabel('t (Seconds)')
192 ylabel('Z(t) & conv(Xref,h)')
193 legend('MATLAB function : conv(X,h)','C++ overlapSave')

```

Listing 9.3: overlapSave_test.m code

Step 3 : Choose for a sig and filt value between [1 7] and [1 3] respectively and run the first three sections namely **section 1**, **section 2** and **section 3**.

This will generate a `time_domain_data.txt` and `time_domain_filter.txt` file in the same folder which contains the time domain signal and filter data respectively.

Step 4 : Find the `overlapSave_test.vcxproj` file in the same folder and open it.

In this project file, find *overlapSave_test.cpp* in *SourceFiles* section and click on it. This file is an example of using *overlapSave* function. Basically, *overlapSave_test.cpp* file consists of four sections:

Section 1 : It reads the *time_domain_data.txt* and *time_domain_filter.txt* files.

Section 2 : It converts signal and filter data into complex form.

Section 3 : It calls the *overlapSave* function to perform convolution.

Section 4 : It saves the result in the text file namely *overlap_save_data.txt*.

```

1 # include "overlap_save_20180208.h"

3 # include <complex>
# include <fstream>
5 # include <iostream>
# include <math.h>
7 # include <stdio.h>
# include <string>
9 # include <strstream>
# include <algorithm>
11 # include <vector>

13 using namespace std;

15 int main()
{
    ////////////////////////////////////////////////////////////////// Section 1 //////////////////////////////////////////////////////////////////
    // Read the time_domain_data.txt and time_domain_filter.txt files /////
    //////////////////////////////////////////////////////////////////
19 ifstream inFile;
21 double ch;
vector <double> inTimeDomain;
23 inFile.open("time_domain_data.txt");

25 // First data (at 0th position) applied to the ch it is similar to the "cin".
inFile >> ch;

27 // It'll count the length of the vector to verify with the MATLAB
29 int count = 0;

31 while (!inFile.eof())
{
    // push data one by one into the vector
    inTimeDomain.push_back(ch);

35    // it'll increase the position of the data vector by 1 and read full vector.s
    inFile >> ch;
    count++;
}

39 inFile.close(); // It is mandatory to close the file at the end.

43 ifstream inFileFilter ;
44 double chFilter;
vector <double> inTimeDomainFilter;

```



```
99 ////////////////////////////////////////////////////////////////// Save data //////////////////////////////////////////////////////////////////
100 ofstream outFile;
101 complex<double> outFileData;
102 outFile.precision(20);
103 outFile.open("overlap_save_data.txt");

104 for (unsigned int i = 0; i <y.size(); i++)
105 {
106     outFile << y[i].real() << endl;
107     outFile << y[i].imag() << endl;
108 }
109 outFile.close();

110 cout << "Execution finished! Please hit enter to exit." << endl;
111 getchar();
112 return 0;
113 }
```

Listing 9.4: overlapSave_test.cpp code

Step 5 : Now, go to the **overlapSave_test.m** and run section 4 and 5.

It'll display the graphs of comparative analysis of the MATLAB and C++ implementation of overlapSave program and also compares results with the MATLAB conv() function.

Resultant analysis of various test signals

1. Signal with two sinusoids and random noise
2. Mixed signal2

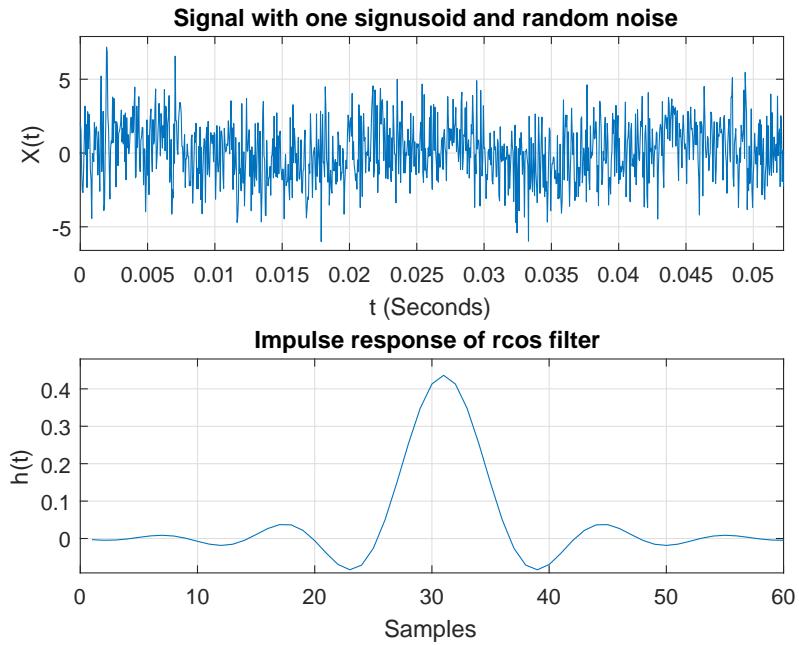


Figure 9.17: Random noise and two sinusoids signal & Impulse response of rcos filter

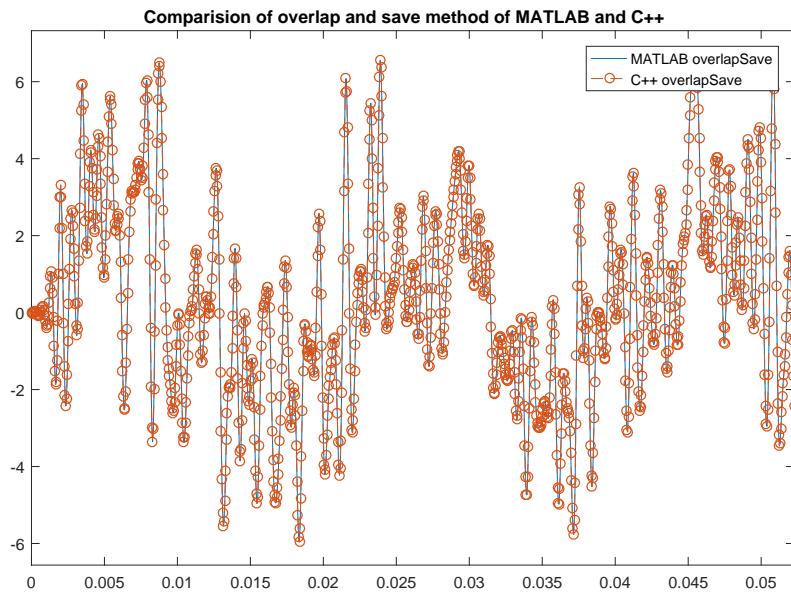


Figure 9.18: MATLAB and C++ comparison

3. Sinusoid with exponent

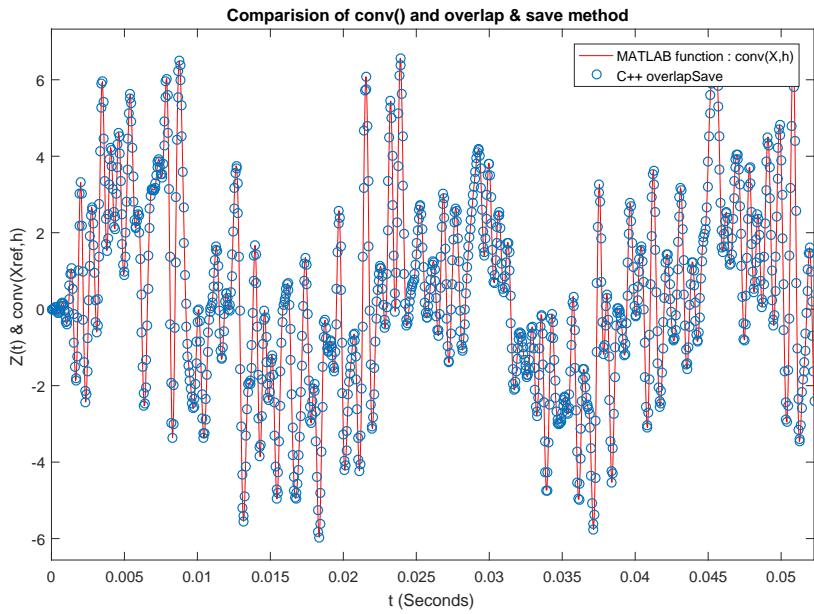
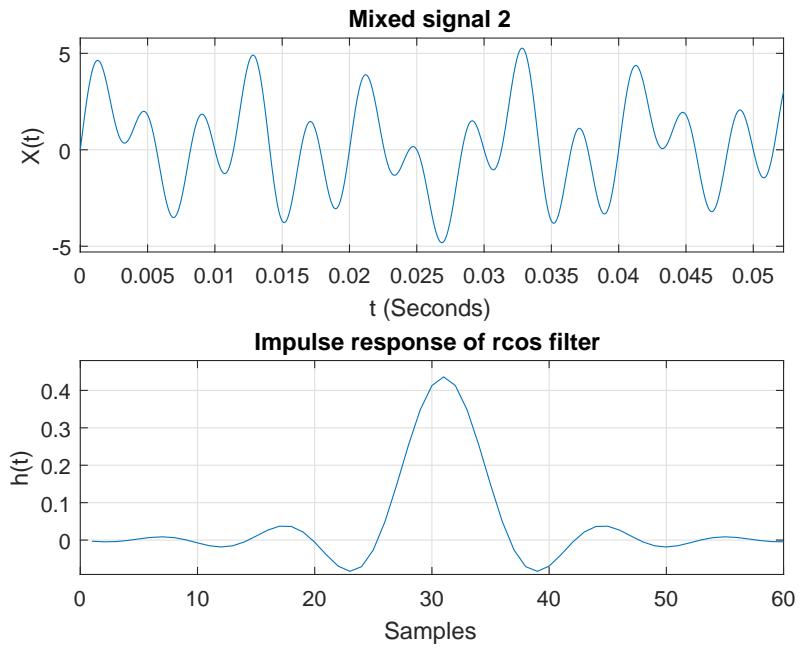
Figure 9.19: MATLAB function `conv()` and C++ `overlapSave` comparison

Figure 9.20: Mixed signal2 & Impulse response of rcos filter

Test example of real-time overlap-save function with Netxpto simulator

This section explains the steps of comparing real-time overlap-save method with the time-domain filtering. The structure of the real-time overlap-save function

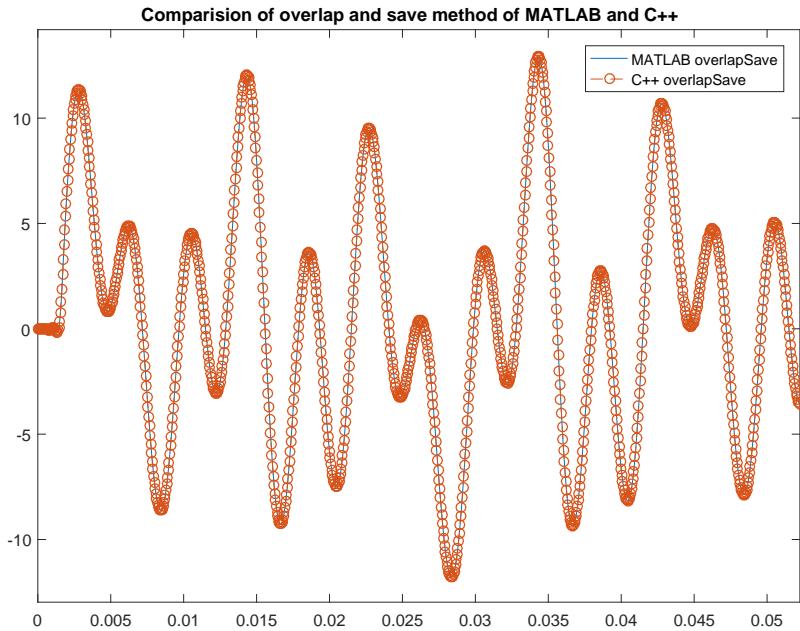


Figure 9.21: MATLAB and C++ comparison

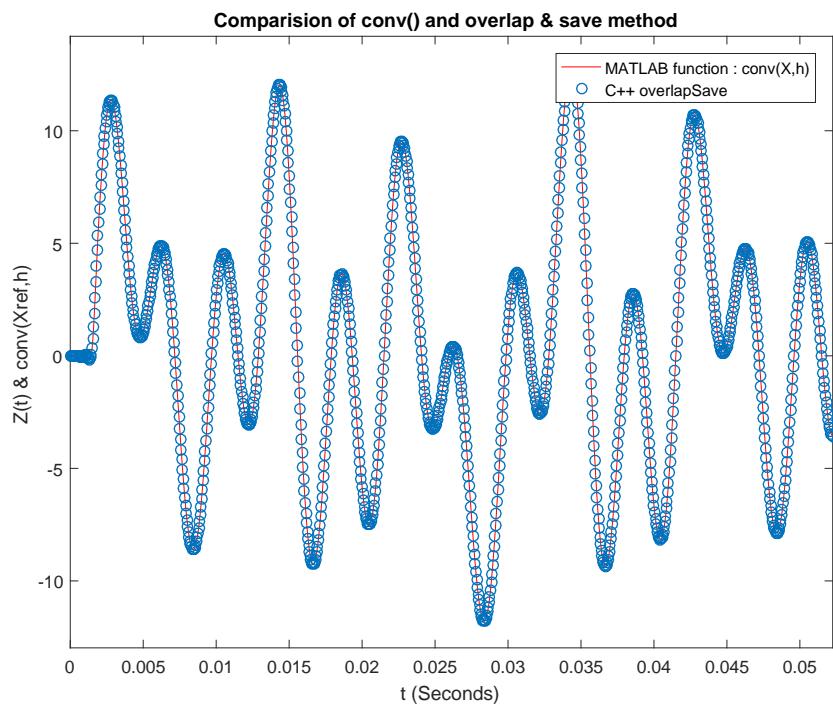


Figure 9.22: MATLAB function conv() and C++ overlapSave comparison

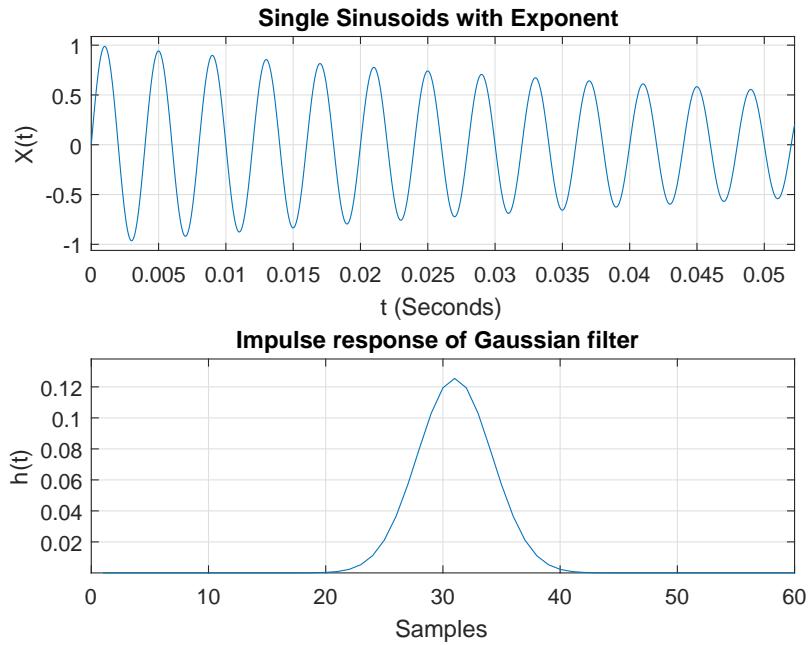


Figure 9.23: Sinusoid with exponent & Impulse response of Gaussian filter

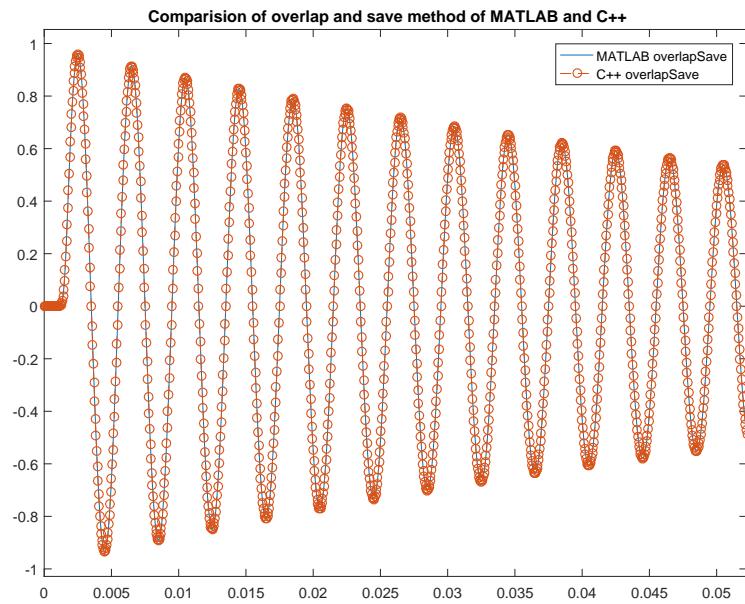


Figure 9.24: MATLAB and C++ comparison

$overlapSave(x_{m-1}(n), x_m(n), h(n))$ requires an impulse response $h(n)$ of the filter. There are two methods to feed the impulse response to the real-time overlap-save function:

Method 1. The impulse response $h(n)$ of the filter can be fed using the time-domain impulse

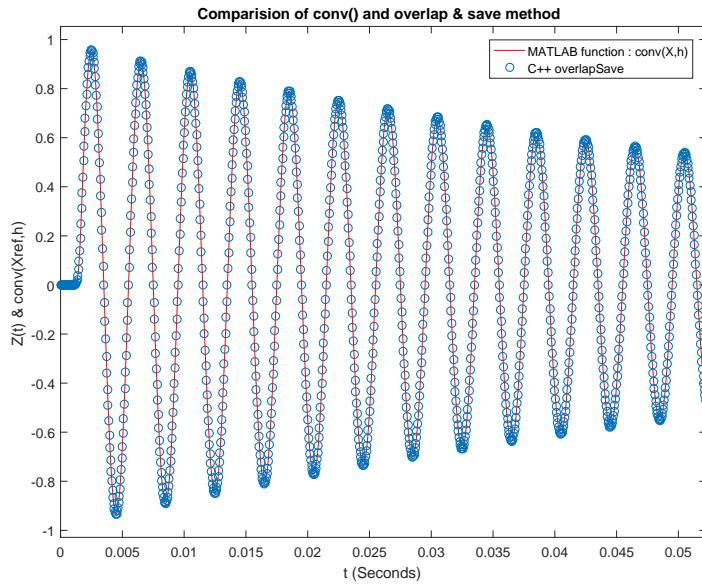


Figure 9.25: MATLAB function `conv()` and C++ `overlapSave` comparison

response formula of the filter.

Method 2. Write the transfer function of the filter and convert it into the impulse response using Fourier transform method.

Here, this example uses the method 2 to feed the impulse response of the filter. In order to compare the result, follow the steps given below:

Step 1 : Open the folder namely `overlapSaveRealTime_test` by following the path "/algorithms/overlapSave/overlapSaveRealTime_test".

Step 2 : Find the `overlapSaveRealTime_test.vcxproj` file and open it.

In this project file, find `filter_20180306.cpp` in *SourceFiles* section and click on it. This file includes the several definitions of the two different filter class namely **FIR_Filter** and **FD_Filter** for filtering in time-domain and frequency-domain respectively. In this file, **FD_Filter::runBlock** displays the logic of real-time overlap-save method.

```

1 # include "filter_20180306.h"

3 //////////////////////////////////////////////////////////////////
4 ////////////////////////////////////////////////////////////////// FIR_Filter ////////////////////////////////////////////////////////////////// TIME DOMAIN
5 //////////////////////////////////////////////////////////////////

7 void FIR_Filter :: initializeFIR_Filter (void) {

9     outputSignals[0]->symbolPeriod = inputSignals[0]->symbolPeriod;
    outputSignals[0]->samplingPeriod = inputSignals[0]->samplingPeriod;

```



```

////////// previousCopy & currentCopy //////////
63 void FD_Filter:: initializeFD_Filter (void)
{
65   outputSignals[0] ->symbolPeriod = inputSignals[0] ->symbolPeriod;
66   outputSignals[0] ->samplingPeriod = inputSignals[0] ->samplingPeriod;
67   outputSignals[0] ->samplesPerSymbol = inputSignals[0] ->samplesPerSymbol;

69   if (!getSeeBeginningOfTransferFunction()) {
70     int aux = (int) ((double)transferFunctionLength) / 2 + 1;
71     outputSignals[0] ->setFirstValueToBeSaved(aux);
72   }

73   if (saveTransferFunction)
74   {
75     ofstream fileHandler("./signals/" + transferFunctionFilename, ios::out);
76     fileHandler << "// ### HEADER TERMINATOR ###\n";
77

78     double samplingPeriod = inputSignals[0] ->samplingPeriod;
79     t_real fWindow = 1 / samplingPeriod;
80     t_real df = fWindow / transferFunction.size();

82     t_real f;
83     for (int k = 0; k < transferFunction.size(); k++)
84     {
85       f = -fWindow / 2 + k * df;
86       fileHandler << f << " " << transferFunction[k] << "\n";
87     }
88     fileHandler.close();
89   }
90 }

93 bool FD_Filter::runBlock(void)
{
94   bool alive{ false };

96   int ready = inputSignals[0] ->ready();
97   int space = outputSignals[0] ->space();
98   int process = min(ready, space);
99   if (process == 0) return false;

100  ////////// previousCopy & currentCopy //////////
101  ////////// previousCopy & currentCopy //////////
102  ////////// previousCopy & currentCopy //////////
103  vector<double> re(process); // Get the Input signal
104  t_real input;
105  for (int i = 0; i < process; i++){
106    inputSignals[0] ->bufferGet(&input);
107    re.at(i) = input;
108  }

110  vector<t_real> im(process);
111  vector<t_complex> currentCopyAux = reImVect2ComplexVector(re, im);
112
113

```

```

115     vector<t_complex> pcInitialize(process); // For the first data block only
116     if (K == 0){ previousCopy = pcInitialize; }

117     // size modification of currentCopyAux to currentCopy.
118     vector<t_complex> currentCopy(previousCopy.size());
119     for (unsigned int i = 0; i < currentCopyAux.size(); i++){
120         currentCopy[i] = currentCopyAux[i];
121     }

122     /////////////////// Filter Data "hn" ///////////////////
123     /////////////////// Filter Data "hn" ///////////////////
124     vector<t_complex> impulseResponse;
125     impulseResponse = transferFunctionToImpulseResponse(transferFunction);
126     vector<t_complex> hn = impulseResponse;

127     /////////////////// OverlapSave in Realtime ///////////////////
128     /////////////////// OverlapSave in Realtime ///////////////////
129     vector<t_complex> OUTaux = overlapSave(currentCopy, previousCopy, hn);

130     previousCopy = currentCopy;
131     K = K + 1;

132     // Remove the size modified data (opposite to "currentCopyAux to currentCopy")
133     vector<t_complex> OUT;
134     for (int i = 0; i < process; i++){
135         OUT.push_back(OUTaux[previousCopy.size() + i]);
136     }

137     // Bufferput
138     for (int i = 0; i < process; i++){
139         t_real val;
140         val = OUT[i].real();
141         outputSignals[0]→bufferPut((t_real)(val));
142     }

143     return true;
144 }
```

Listing 9.5: filter_20180306.cpp code

Step 3 : Next, open **overlapSaveRealTime_test.cpp** file in the same project and run it. Graphically, this file represents the following Figure 9.26.

Step 4 : Open the MATLAB visualizer and compare the signal **S6.sgn** and **S7.sgn** as shown in Figure 9.27.

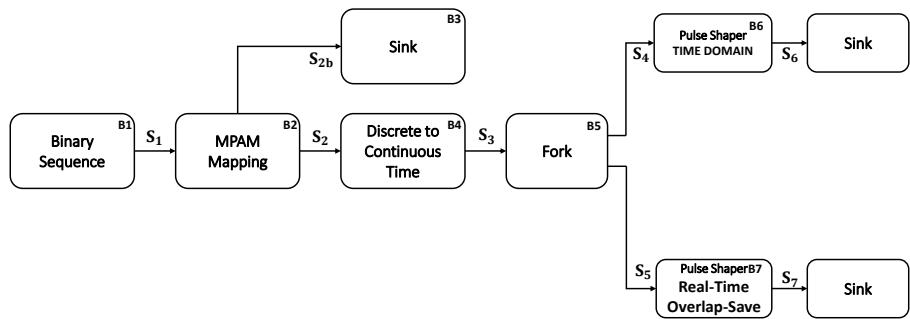


Figure 9.26: Real-time overlap-save example setup

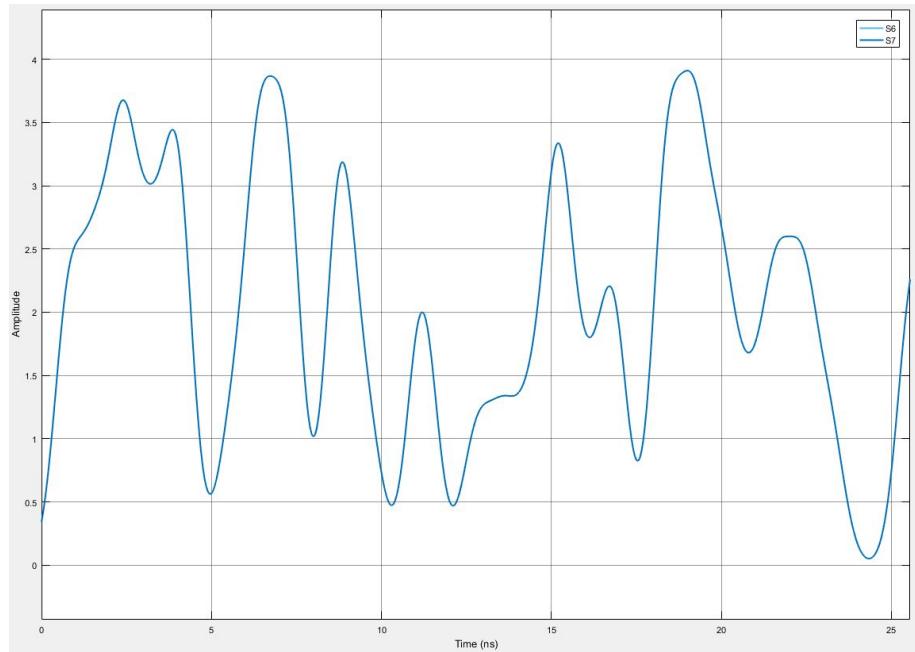


Figure 9.27: Comparison of signal S6 and S7

References

- [1] Blahut, R.E. *Fast Algorithms for Digital Signal Processing*, Addison-Wesley, Reading, MA, 1985.
- [2] Steven W. Smith. *The Scientist and Engineer's Guide to Digital Signal Processing*. California Technical Publishing, San Diego, CA, USA, 1997.

9.3 Filter

Header File	:	filter_*.h
Source File	:	filter_*.cpp
Version	:	20180201 (Romil Patel)

In order to filter any signal, a new generalized version of the filter namely *filter_*.h* & *filter_*.cpp* are programmed which facilitate filtering in both time and frequency domain. Basically, *filter_*.h* file contains the declaration two distinct class namely **FIR_Filter** and **FD_Filter** which help to perform filtering in time-domain (using impulse response) and frequency-domain (using transfer function) respectively (see Figure 9.28). The *filter_*.cpp* file contains the definitions of all the functions declared in the **FIR_Filter** and **FD_Filter**.

In the Figure 9.28, the function **bool runblock(void)** in the transfer function based **FD_Filter**

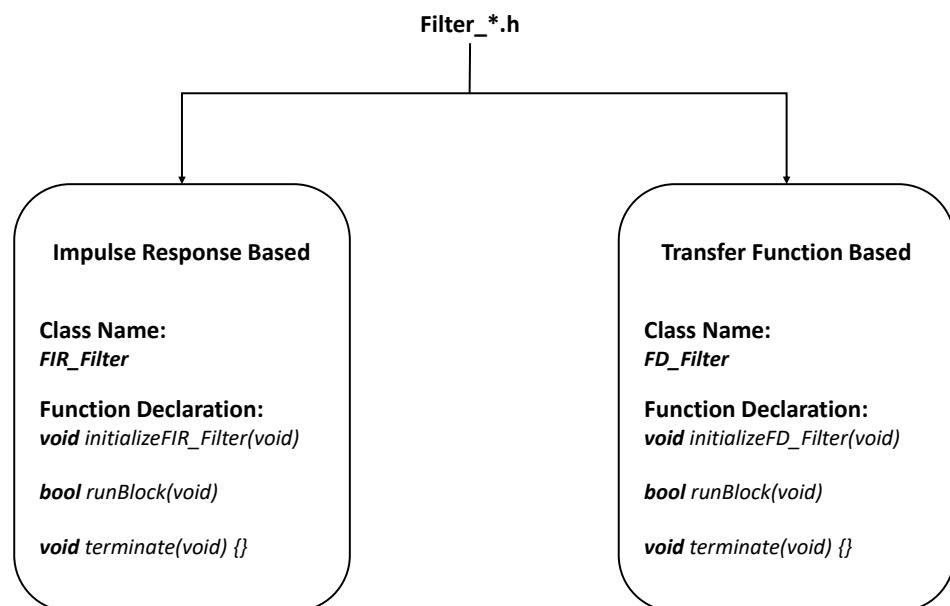


Figure 9.28: Filter class

class is the declaration of the real-time overlap-save method for filtering in the frequency domain. On the other hand, the function **bool runblock(void)** in the **FIR_Filter** class is the declaration of the function to facilitate filtering in the time domain.

All those function declared in the *filter_*.h* file are defined in the *filter_*.cpp* file. The definition of **bool runblock(void)** function for both the classes are the following,

2 **bool** FIR_Filter :: runBlock(**void**) {

4

```

6   int ready = inputSignals[0] -> ready();
7   int space = outputSignals[0] -> space();
8   int process = min(ready, space);
9   if (process == 0) return false;
10
11  for (int i = 0; i < process; i++) {
12      t_real val;
13      (inputSignals[0]) -> bufferGet(&val);
14      if (val != 0) {
15          vector<t_real> aux(impulseResponseLength, 0.0);
16          transform(impulseResponse.begin(), impulseResponse.end(), aux.begin(), bind1st(multiplies<t_real>(), val));
17          transform(aux.begin(), aux.end(), delayLine.begin(), delayLine.begin(), plus<t_real>());
18      }
19      outputSignals[0] -> bufferPut((t_real)(delayLine[0]));
20      rotate(delayLine.begin(), delayLine.begin() + 1, delayLine.end());
21      delayLine[impulseResponseLength - 1] = 0.0;
22  }
23
24  return true;
25 };

```

Listing 9.6: Definition of **bool FIR_Filter::runBlock(void)**

```

1  bool FD_Filter::runBlock(void)
2  {
3      bool alive{ false };
4
5      int ready = inputSignals[0] -> ready();
6      int space = outputSignals[0] -> space();
7      int process = min(ready, space);
8      if (process == 0) return false;
9
10     /////////////////////////////// previousCopy & currentCopy //////////////////////////////
11     /////////////////////////////// previousCopy & currentCopy //////////////////////////////
12     vector<double> re(process); // Get the Input signal
13     t_real input;
14     for (int i = 0; i < process; i++){
15         inputSignals[0] -> bufferGet(&input);
16         re.at(i) = input;
17     }
18
19     vector<t_real> im(process);
20     vector<t_complex> currentCopyAux = reImVect2ComplexVector(re, im);
21
22     vector<t_complex> pcInitialize(process); // For the first data block only
23     if (K == 0){ previousCopy = pcInitialize; }
24
25     // size modification of currentCopyAux to currentCopy.
26     vector<t_complex> currentCopy(previousCopy.size());
27     for (unsigned int i = 0; i < currentCopyAux.size(); i++){
28         currentCopy[i] = currentCopyAux[i];

```

```

30   }
31   ///////////////////// Filter Data "hn" /////////////////////
32   ///////////////////// vector<t_complex> impulseResponse;
33   impulseResponse = transferFunctionToImpulseResponse(transferFunction);
34   vector<t_complex> hn = impulseResponse;
35
36   ///////////////////// OverlapSave in Realtime /////////////////////
37   ///////////////////// vector<t_complex> OUTaux = overlapSave(currentCopy, previousCopy, hn);
38
39   previousCopy = currentCopy;
40   K = K + 1;
41
42   // Remove the size modified data (opposite to "currentCopyAux to currentCopy")
43   vector<t_complex> OUT;
44   for (int i = 0; i < process; i++){
45     OUT.push_back(OUTaux[previousCopy.size() + i]);
46   }
47
48   // Bufferput
49   for (int i = 0; i < process; i++){
50     t_real val;
51     val = OUT[i].real();
52     outputSignals[0]→bufferPut((t_real)(val));
53   }
54
55   return true;
56 }
57
58 }


```

Listing 9.7: Definition of **bool FD_Filter::runBlock(void)**

Both the class of the filter discussed above are the root class for the filtering operation in time and frequency domain. To perform filtering operation, we have to include *filter_*.h* and *filter_*.cpp* in the project. These filter root files require either *impulse response* or *transfer function* of the filter to perform filtering operation in time domain and frequency domain respectively. In the next section, we'll discuss an example of pulse shaping filtering using the proposed filter root class.

Example of pulse shaping filtering

This section explains how to use **FIR_Filter** and **FD_Filter** class for the pulse shaping using the impulse response and the transfer function, respectively and it also compares the resultant output of both methods. The impulse response for the **FIR_Filter** class will be generated by a *pulse_shaper.cpp* file and the transfer function for the **FD_Filter** will be generated by a *pulse_shaper_fd_20180306.cpp* file and applied to the **bool runblock(void)** block as shown in Figure 9.29.

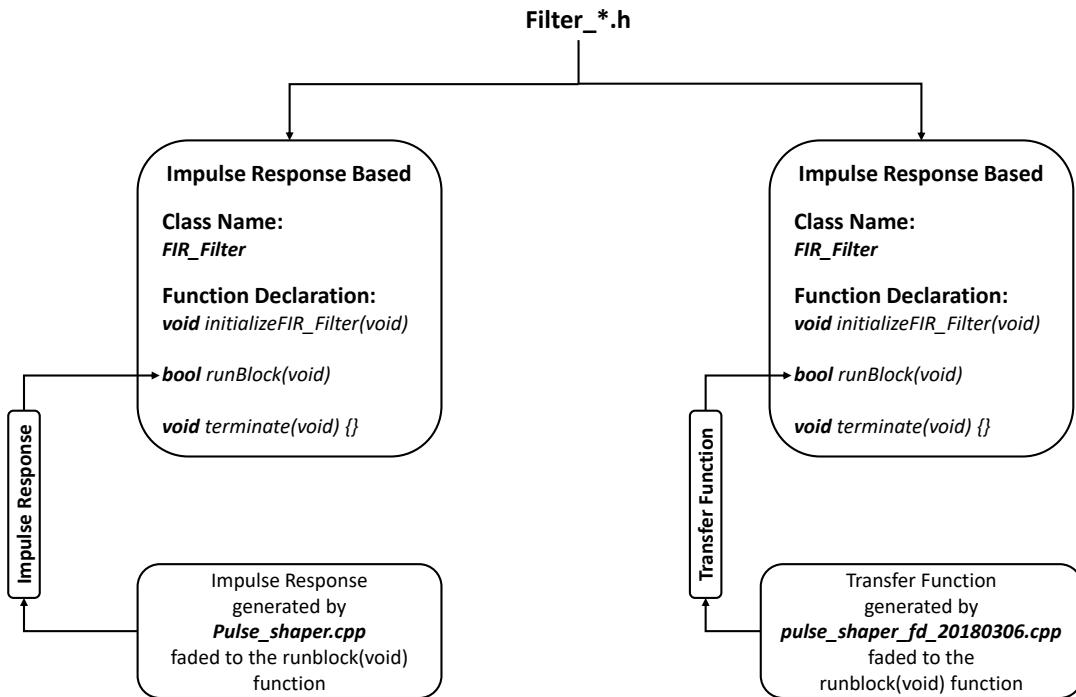Figure 9.29: Pulse shaping using `filter_* .h`

Example of pulse shaping filtering : Procedural steps

This section explains the steps of filtering a signal with the various pulse shaping filter using its impulse response and transfer function as well. It also displays the comparison between the resultant output generated by both the methods. In order to conduct the experiment, follow the steps given below:

Step 1 : In the directory, open the folder namely `filter_test` by following the path `"/algorithms/filter/filter_test"`.

Step 2 : Find the `filter_test.vcxproj` file in the same folder and open it.

In this project file, find `filter_test.cpp` in *SourceFiles* section and click on it. This file represents the simulation set-up as shown in Figure 9.30.

Step 3 : Check how **PulseShaper** and **PulseShaperFd** blocks are implemented.

Check the appendix for the various types of pulse shaping techniques and what are the different parameters used to adjust the shape of the pulse shaper.

Step 4 : Run the `filter_test.cpp` code and compare the signals **S6.sgn** and **S7.sgn** using visualizer.

Here, we have used three different types of pulse shaping filter namely, raised cosine, root raised cosine and Gaussian pulse shaper. The following Figure 9.31, 9.32 and 9.33 display

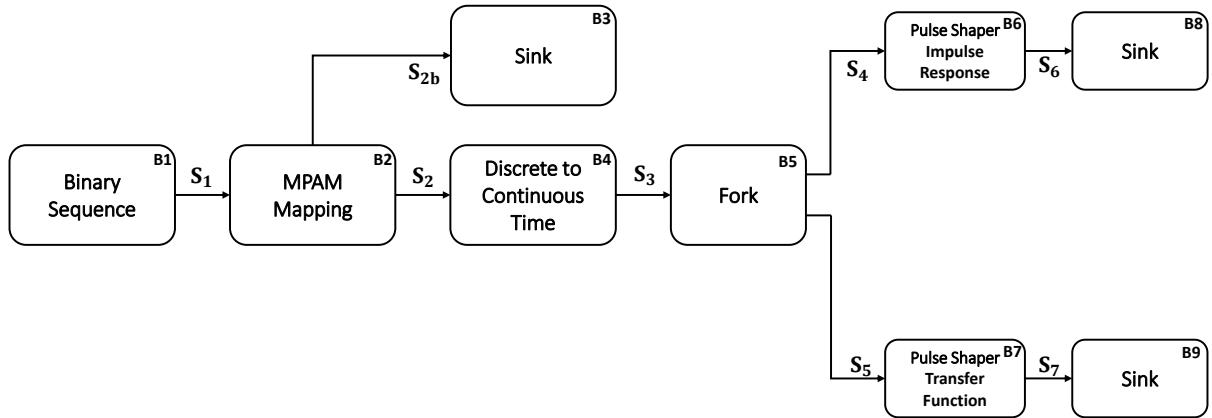


Figure 9.30: Filter test setup

the comparison of the output signals **S6.sgn** and **S7.sgn** for the raised cosine, root raised cosine and Gaussian pulse shaping filter, respectively.

Case 1 : Raised cosine

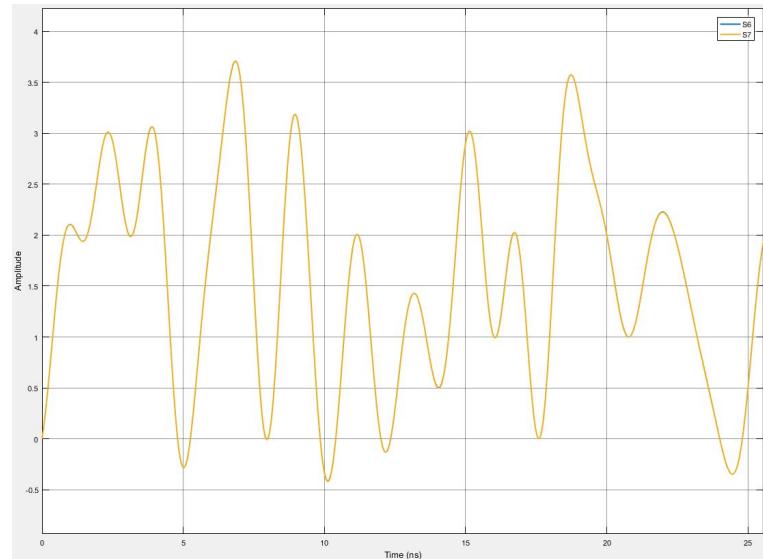


Figure 9.31: Raised cosine pulse shaping results comparison

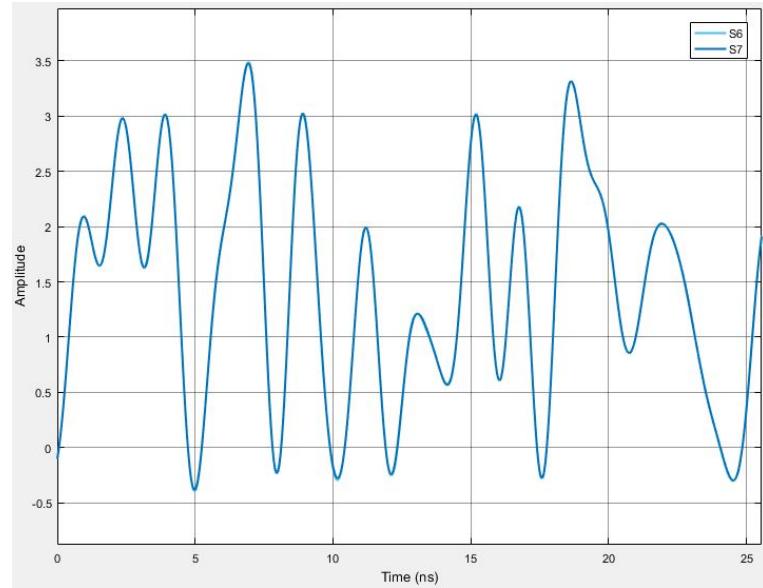
Case 2 : Root raised cosine

Figure 9.32: Root raised cosine pulse shaping result

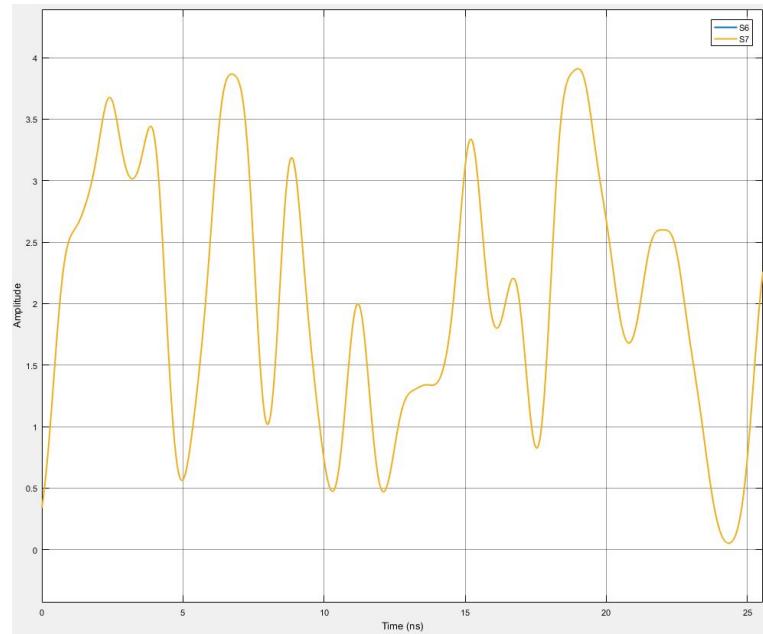
Case 3 : Gaussian

Figure 9.33: Gaussian pulse shaping results comparison

APPENDICES

A. Raised cosine pulse shaper

The raised cosine pulse shaping filter has a transfer function given by,

$$H_{RC}(f) = \begin{cases} 1 & \text{for } |f| \leq \frac{1-\beta}{2T_s} \\ \frac{1}{2} \left[1 + \cos \left(\frac{\pi T_s}{\beta} \left[|f| - \frac{1-\beta}{2T_s} \right] \right) \right] & \text{for } \frac{1-\beta}{2T_s} < |f| \leq \frac{1+\beta}{2T_s} \\ 0 & \text{otherwise} \end{cases} \quad (9.7)$$

The parameter, β is the roll-off factor of the raised cosine filter. The impulse response of the raised cosine filter is given by,

$$h_{RC}(t) = \frac{\sin(\pi t/T_s)}{\pi t/T_s} \frac{\cos(\pi \beta t/T_s)}{1 - 4\beta^2 t^2/T_s^2} \quad (9.8)$$

B. Root raised cosine pulse shaper

The raised cosine pulse shaping filter has a transfer function given by,

$$H_{RC}(f) = \begin{cases} 1 & \text{for } |f| \leq \frac{1-\beta}{2T_s} \\ \sqrt{\frac{1}{2} \left[1 + \cos \left(\frac{\pi T_s}{\beta} \left[|f| - \frac{1-\beta}{2T_s} \right] \right) \right]} & \text{for } \frac{1-\beta}{2T_s} < |f| \leq \frac{1+\beta}{2T_s} \\ 0 & \text{otherwise} \end{cases} \quad (9.9)$$

The parameter, β is the roll-off factor of the raised cosine filter. The impulse response of the root raised cosine filter is given by,

$$h_{RRC}(t) = \begin{cases} \frac{1}{T_s} \left(1 + \beta \left(\frac{4}{\pi} - 1 \right) \right) & \text{for } t = 0 \\ \frac{\beta}{T_s \sqrt{2}} \left[\left(1 + \frac{2}{\pi} \right) \sin \left(\frac{\pi}{4\beta} \right) + \left(1 - \frac{2}{\pi} \right) \cos \left(\frac{\pi}{4\beta} \right) \right] & \text{for } t = \frac{T_s}{4\beta} \\ \frac{1}{T_s} \frac{\sin \left[\pi \frac{t}{T_s} (1 - \beta) \right] + 4\beta \frac{t}{T_s} \cos \left[\pi \frac{t}{T_s} (1 + \beta) \right]}{\pi \frac{t}{T_s} \left[1 - \left(4\beta \frac{t}{T_s} \right)^2 \right]} & \text{otherwise} \end{cases} \quad (9.10)$$

C. Gaussian pulse shaper

The Gaussian pulse shaping filter has a transfer function given by,

$$H_G(f) = \exp(-\alpha^2 f^2) \quad (9.11)$$

The parameter α is related to B , the 3-dB bandwidth of the Gaussian shaping filter is given by,

$$\alpha = \frac{\sqrt{\ln 2}}{\sqrt{2}B} = \frac{0.5887}{B} \quad (9.12)$$

From the equation 9.12, as α increases, the spectral occupancy of the Gaussian filter decreases. The impulse response of the Gaussian filter can be given by,

$$h_G(t) = \frac{\sqrt{\pi}}{\alpha} \exp\left(-\frac{\pi^2}{\alpha^2} t^2\right) \quad (9.13)$$

From the equation 9.12, we can also write that,

$$\alpha = \frac{0.5887}{BT_s} T_s \quad (9.14)$$

Where, BT_s is the 3-dB bandwidth-symbol time product which ranges from $0 \leq BT_s \leq 1$ given as the input parameter for designing the Gaussian pulse shaping filter.

9.4 Hilbert Transform

Header File	:	hilbert_filter_*.h
Source File	:	hilbert_filter_*.cpp
Version	:	20180306 (Romil Patel)

What is the purpose of Hilbert transform?

The Hilbert transform facilitates the formation of analytical signal. An analytic signal is a complex-valued signal that has no negative frequency components, and its real and imaginary parts are related to each other by the Hilbert transform.

$$s_a(t) = s(t) + i\hat{s}(t) \quad (9.15)$$

where, $s_a(t)$ is an analytical signal and $\hat{s}(t)$ is the Hilbert transform of the signal $s(t)$. Such analytical signal can be used to generate Single Sideband Signal (SSB) signal.

Transfer function for the discrete Hilbert transform

There are two approached to generate the analytical signal using Hilbert transformation method. First method generates the analytical signal $S_a(t)$ directly, on the other hand, second method will generate the $\hat{s}(t)$ signal which is multiplied with i and added to the $s(t)$ to generate the analytical signal $S_a(t)$.

Method 1 :

The discrete time analytical signal $S_a(t)$ corresponding to $s(t)$ is defined in the frequency domain as

$$S_a(f) = \begin{cases} 2S(f) & \text{for } f > 0 \\ S(f) & \text{for } f = 0 \\ 0 & \text{for } f < 0 \end{cases} \quad (9.16)$$

which is inverse transformed to obtain an analytical signal $S_a(t)$.

Method 2 :

The discrete time Hilbert transformed signal $\hat{s}(t)$ corresponding to $s(t)$ is defined in the frequency domain as

$$\hat{S}(f) = \begin{cases} -iS(f) & \text{for } f > 0 \\ 0 & \text{for } f = 0 \\ iS(f) & \text{for } f < 0 \end{cases} \quad (9.17)$$

which is inverse transformed to obtain a Hilbert transformed signal $\hat{S}(t)$. To generate an analytical signal, $\hat{S}(t)$ is added to the $S(t)$ to get the equation 9.15.

Real-time Hilbert transform : Proposed logical flow

To understand the new proposed method, consider that the signal consists of 2048 samples and the **bufferLength** is 512. Therefore, by considering the **bufferLength**, we will process the whole signal in four consecutive blocks namely *A*, *B*, *C* and *D*; each with the length of 512 samples as shown in Figure 9.34. The filtering process will start only after acquiring first

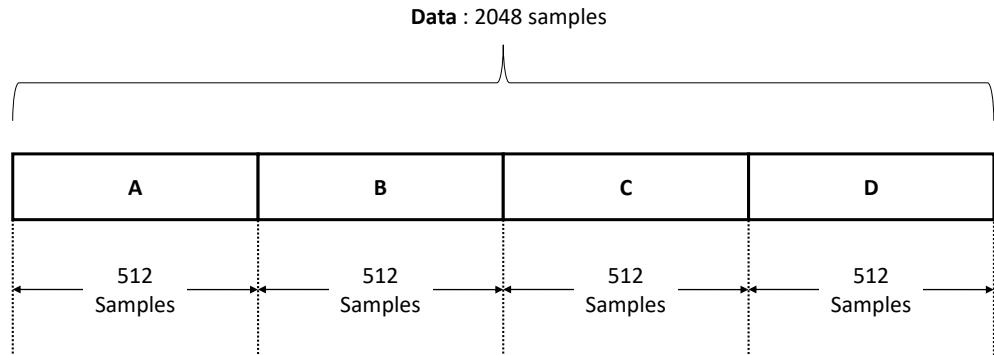


Figure 9.34: Logical flow

two blocks *A* and *B* (see iteration 1 in Figure 9.35), which introduces delay in the system. In the iteration 1, $x(n)$ consists of 512 front Zeros, block *A* and block *B* which makes the total length of the $x(n)$ is $512 \times 3 = 1536$ symbols. After applying filter to the $x(n)$, we will capture the data which corresponds to the block *A* only and discard the remaining data from each side of the filtered output.

In the next iteration 2, we'll use **previousCopy** *A* and *B* along with the **currentCopy** "C"

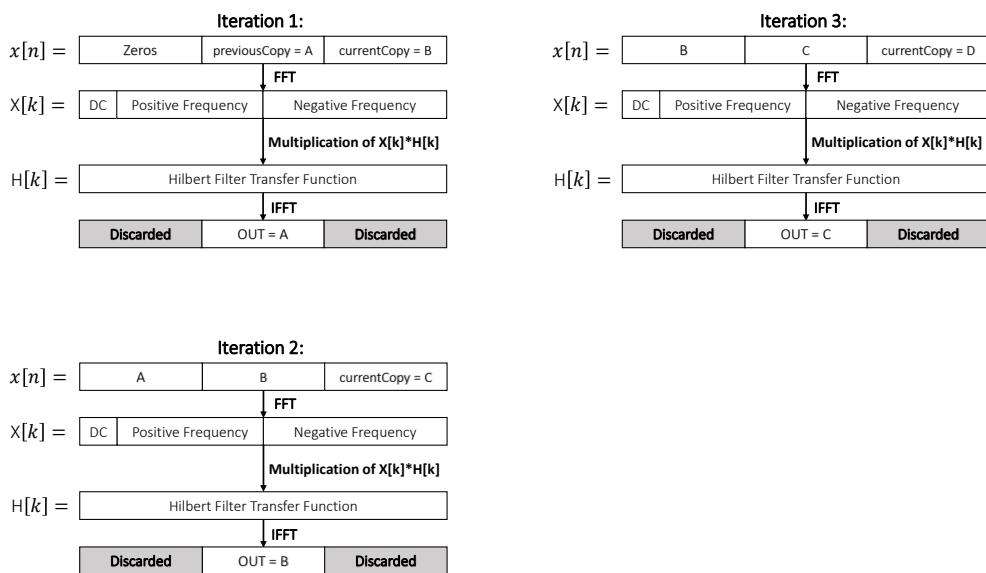


Figure 9.35: Logical flow of real-time Hilbert transform

and process the signal same as we did in iteration and we will continue the procedure until the end of the sequence.

Real-time Hilbert transform : Test setup

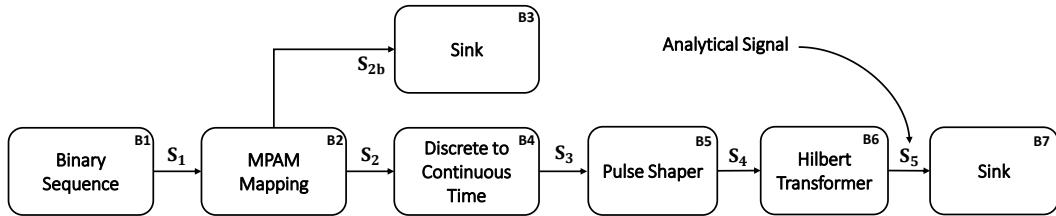


Figure 9.36: Test setup for the real time Hilbert transform

Real-time Hilbert transform : Results

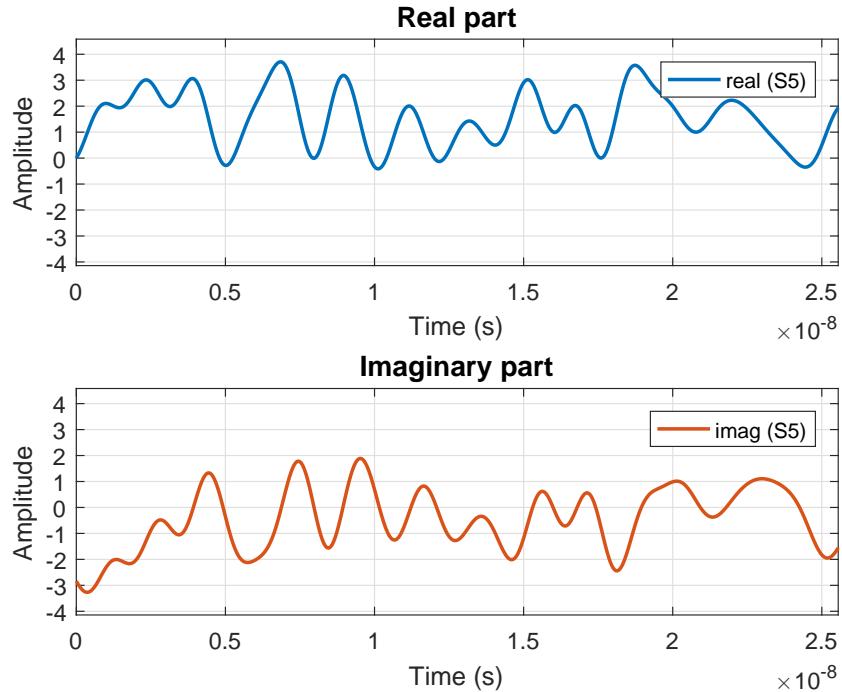


Figure 9.37: Complex analytical signal S_5 with its real part S_4 and imaginary part \hat{S}_4

Remark : Here, we have used method 1 to generate analytical signal using Hilbert transform.

Chapter 10

Code Development Guidelines

Chapter 11

Building C++ Projects Without Visual Studio

This is a guide on how to build C++ projects without having Microsoft Visual Studio installed. All the necessary files will be available in the `\msbuild\` folder on this repository.

11.1 Installing Microsoft Visual C++ Build Tools

Run the file `visualcppbuildtools_full.exe` and follow all the setup instructions;

11.2 Adding Path To System Variables

Please follow this step-by-step tutorial carefully.

1. Open the **Control Panel**.
2. Select the option **System and Security**.
3. Select the option **System**.
4. Select **Advanced System Settings** on the menu on the left side of the window.
5. This should have opened another window. Click on **Environment variables**.
6. Check if there is a variable called **Path** in the **System Variables** (bottom list).
7. If it doesn't exist, create a new variable by pressing **New** in **System Variables** (bottom list). Insert the name **Path** as the name of the variable and enter the following value `C:\Windows\Microsoft.Net\Framework\v4.0.30319`. Jump to step 10.
8. If it exists, click on the variable **Path** and press **Edit**. This should open another window;
9. Click on **New** to add another value to this variable. Enter the following value: `C:\Windows\Microsoft.Net\Framework\v4.0.30319`.
10. Press **Ok** and you're done.

11.3 How To Use MSBuild To Build Your Projects

You are now able to build (compile and link) your C++ projects without having Visual Studio installed on your machine. To do this, please follow the instructions below:

1. Open the **Command Line** and navigate to your project folder (where the .vcxproj file is located).
2. Enter the command:
`msbuild <filename> /tv:14.0 /p:PlatformToolset=v140,TargetPlatformVersion=8.1,OutDir=".\"`, where <filename> is your .vcxproj file.

After building the project, the .exe file should be automatically generated to the current folder.

The signals will be generated into the sub-directory `\signals\`, which must already exist.

11.4 Known Issues

11.4.1 Missing ucrtbased.dll

In order to solve this issue, please follow the instructions below:

1. Navigate to `C:\Program Files (x86)\Windows Kits\10\bin\x86\ucrt\`
2. Copy the following file: `ucrtbased.dll`
3. Paste this file in the following folder: `C:\Windows\System32\`
4. Paste this file in the following folder: `C:\Windows\SysWOW64\`

Attention:you need to paste the file in BOTH of the folders above.

Chapter 12

Git Helper

Git creates and maintains a database that store versions of a repository, i.e. versions of a folder. To create this database for a specific folder the Git application must be installed on the computer. Open the Git console program and go to the specific folder and execute the following command:

```
git init
```

The Git database is created and stored in the folder `.git` in the root of your repository. The Git commands allow you to manipulate this database.

12.1 Data Model

To understand Git is fundamental to understand the Git data model.

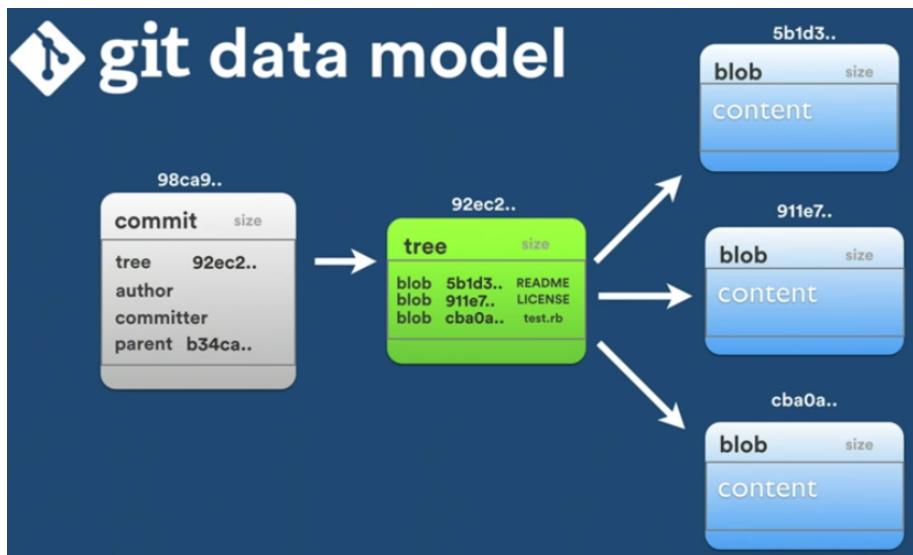


Figure 12.1: Git data model.

Git manipulates the following objects:

- commits - text files that store a description of the repository;
- trees - text files that store a description of a folder;

- blobs - the files that exist in your repository.

The objects are stored in the folder `.git/objects`. Each store object is identified by its SHA1 hash value, i.e. 20 bytes which identifies unequivocally the object. Note that 20 bytes can be represented by a 40 characters hexadecimal string. The identifier of each object is the 40 characters hexadecimal string. Each particular object is stored in a sub-folder inside the `.git/objects`. The name of the sub-folder is the two most significative characters of the SHA1 hash value. The name of the file that is inside the sub-folder is the remaining thirty eight characters of the SHA1 hash value. The Git stores all committed versions of a file. The Git maintains a content-addressable file systems, i.e. a file system in which the files can be accessed based on its content.

A commit object is identified by a SHA1 hash value, and has the following information: a pointer for a tree (the root of your repository), a pointer for the previous commit, the author of the commit, the committer and a commit message. The author is the person who did the work. The committer is the person who validate the work and who apply the work by doing the commit. By doing this difference git allow both to get the credit, the author and the committer. Example of a commit file contend:

```
tree 2c04e4bad1e2bcc0223239e65c0e6e822bba4f16
parent bd3c8f6fed39a601c29c5d101789aaa1dab0f3cd
author NetXPTO <netxpto@gmail.com> 1514997058 +0000
committer NetXPTO <netxpto@gmail.com> 1514997058 +0000
```

Here goes the commit message.

A tree object is identified by a SHA1 hash value, and has a list of blobs and trees that are inside that tree. Example of a tree file contend:

100644	blob	bdb0cabc87cf50106df6e15097dff816c8c3eb34	.gitattributes
100644	blob	50492188dc6e12112a42de3e691246dafdad645b	.gitignore
100644	blob	8f564c4b3e95add1a43e839de8adbfd1ceccf811	bfg-1.12.16.jar
040000	tree	de44b36d96548240d98cb946298f94901b5f5a05	doc
040000	tree	8b7147dbfdc026c78fee129d9075b0f6b17893be	garbage
040000	tree	bdfcd8ef2786ee5f0f188fc04d9b2c24d00d2e92	include
040000	tree	040373bd71b8fe2fe08c3a154cada841b3e411fb	lib
040000	tree	7a5fce17545e55d2faa3fc3ab36e75ed47d7bc02	msbuild
040000	tree	b86efba0767e0fac1a23373aaf95884a47c495c5	mtools
040000	tree	1f981ea3a52bccf1cb00d7cb6dfdc687f33242ea	references
040000	tree	86d462afd7485038cc916b62d7cbfc2a41e8cf47	sdf
040000	tree	13bfce10b78764b24c1e3dfbd0b10bc6c35f2f7b	things_to_do
040000	tree	232612b8a5338ea71ab6a583d477d41f17ebae32	visualizerXPTO
040000	tree	1e5ee96669358032a4a960513d5f5635c7a23a90	work_in_progress

A blob is identified by a SHA1 hash value, and has the file contend compressed. A git header

and tailor is added to each file and the file is compressed using the zlib library. The git header is just the file type, file size and the \NUL character, for instance "blob 13\NUL", the tailor is just the \n character. The blob is stored as a binary file.

12.2 Refs

SHA1 hash values are hard to memorize by humans. To make life easier to humans we use refs. A ref associate a name, easier to memorize by humans, with a SHA1 hash value. Therefore refs are pointers to objects. Refs are implemented by text files, the name of the file is the name of the ref and inside the file is a string with the SHA1 hash value.

There are different type of refs. Some are static, for instance the tags, others are actualized automatically, for instance the branches.

12.3 Tags

A tag is just a ref for a specific commit. A tag do not change over time.

12.4 Branch

A branch is a ref that points for a commit that is originated by a divergence from a common point. A branch is automatically actualized so that it always points for the most recent commit of that branch.

12.5 Heads

Heads is a pointer for the commit where you are.

12.6 Database Folders and Files

12.6.1 Objects Folder

Git stores the database and the associated information in a set of folders and files inside the folder `.git` in the root of your repository.

The folder `.git/objects` stores information about all objects (commits, trees and blobs). The objects are stored in files inside folders. The name of the folders are the 2 first characters of the SHA1 40 characters hexadecimal string. The name of the files are the other 38 hexadecimal characters of the SHA1. The information is compressed to save same space but it can be access using some applications.

12.6.2 Refs Folder

The `.git/refs` folder has inside the following folders `heads`, `remotes`, and `tags`. The `heads` has inside a ref for all local branches of your repository. The `remotes` folder has inside a set of folders with the name of all remote repositories, inside each folder is a ref for all branches in that remote repository. The `tag` folder has a ref for each tag.

12.7 Git Spaces

Git uses several spaces.

- workspace - is your directories where you are working;
- index - when you record changes before commit them;
- blobs - the files that exist in your repository.

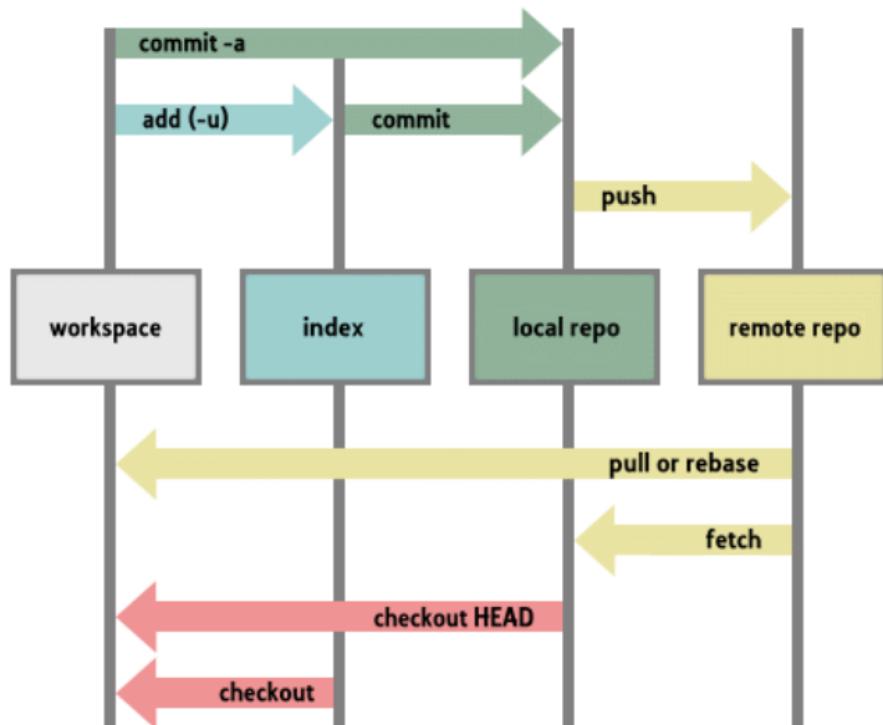


Figure 12.2: Git spaces.

12.8 Workspace

12.9 Index

12.10 Merge

Merge is a fundamental concept to git. It is the way you consolidate your work.

12.10.1 Fast-Forward Merge

12.10.2 Resolve

12.10.3 Recursive

12.10.4 Octopus

12.10.5 Ours

12.10.6 Subtree

12.10.7 Custom

12.11 Commands

12.11.1 Porcelain Commands

git add

git add, store a file that was changed to the index.

git bisect

git branch

git branch -set-upstream-to=<remote>/<branch> <local branch>, links a local branch with a branch in a remote repository.

git cat-file

git cat-file -t <hash>

shows the type of the objects

git cat-file -p <hash>

shows the contend of the object

git clone

git diff

git diff shows the changes in the working space.

git diff -name-only shows the changes in the working space, only file names.

git diff -cached shows the changes in the index space.

git diff -cached -name-only shows the changes in the index space, only file names.

git fetch -all

git init

git init, used to initialize a git repository. It creates the *.git* folder and all its subfolders and files. The subfolders are *objects*, *refs*, ... There are also the following files *HEAD*.

git log

shows a list of commits from reverse time order (goes back on time), i.e. shows the history of your repository. The history of a repository can be represented by a directed acyclic graph (dag for short), pointing in the forward direction in time.

options

-graph

shows a graphical representation of the repository commits history.

git rebase

git rebase <branch2 or commit2>, finds a common point between the current branch and branch2 or commit2, reapply all commits of your current branch from that divergent points on top of branch2 or commit2, one by one.

git reset

git reset --soft HEAD 1, moves one commit back but keeps all modified files.

git reset --hard HEAD 1, moves one commit back and cleans all the modified files.

git reflog

Keep a log file with all commands from the last 90 days.

git show

Shows what is new in the last commit.

git stash

Stash is a global branch where you can store the present state.

git stash, save the present state of your repository.

git stash -list, shows what is in the stash.

git status

12.11.2 Pluming Commands

git count-object

git count-object -H, counts all object and shows the result in a readable form (-H, human).

git gc

Garbage collector. Eliminates all objects that are not referenced, i.e. has no reference associated with.

git gc --prune=all

git hash-object

git hash-object -w <file>, calculates the SHA1 hash value of a file and write it in the *.git/objects* folder.

git cat-files

git cat-files -p <sha1>, shows the contend of a file in a readable format (flag -p, pretty format).

git cat-files -t <sha1>, shows the type of a file.

git update-index

git update-index --add <file name>, creates the hash and adds the <file_name> to the index.

git ls-files

git ls-files -stage, shows all files that you are tracking.

git write-tree**git commit-tree****git update-ref**

git update-ref refs/heads/<branch name> <commit sha1 value>, creates a branch that points to the <commit sha1 value>.

git verify-pack

12.12 The Configuration Files

There is a config file for each repository that is stored in the *.git/* folder with the name *config*.

There is a config file for each user that is stored in the *c:/users/<user name>/* folder with the name *.gitconfig*.

To open the *c:/users/<user name>/.gitconfig* file type:

```
git config --global -e
```

12.13 Pack Files

Pack files are binary files that git uses to save data and compress your repository. Pack files are generated periodically by git or with the use of gc command.

12.14 Applications

12.14.1 Meld

12.14.2 GitKraken

12.15 Error Messages

12.15.1 Large files detected

Clean the repository with the [BFG Repo-Cleaner](#).

Run the Java program:

```
java -jar bfg-1.12.16.jar --strip-blobs-bigger-than 100M
```

This program is going to remote from your repository all files larger than 100MBytes. After

do:

```
git push --force.
```

Chapter 13

Simulating VHDL programs with GHDL

This guide will help you simulate VHDL programs with the open-source simulator GHDL.

13.1 Adding Path To System Variables

Please follow this step-by-step tutorial:

1. Open the **Control Panel**.
2. Select the option **System and Security**.
3. Select the option **System**.
4. Select **Advanced System Settings** on the menu on the left side of the window.
5. This should have opened another window. Click on **Environment variables**.
6. Check if there is a variable called **Path** in the **System Variables** (bottom list).
7. **If it doesn't exist**, create a new variable by pressing **New** in **System Variables** (bottom list). Insert the name **Path** as the name of the variable and enter your absolute path to the folder `\LinkPlanner\vhdl_simulation\ghdl\bin`.
Example: `C:\repos\LinkPlanner\vhdl_simulation\ghdl\bin`.
Jump to step 10.
8. **If it exists**, click on the variable **Path** and press **Edit**. This should open another window;
9. Click on **New** to add another value to this variable. Enter your absolute path to the folder `\LinkPlanner\vhdl_simulation\ghdl\bin`.
Example: `C:\repos\LinkPlanner\vhdl_simulation\ghdl\bin`.
10. Press **Ok** and you're done.

13.2 Using GHDL To Simulate VHDL Programs

This guide will only cover the simulation of the VHDL module in this repository. This simulation will take an .sgn file and output its binary information, removing the header. There are two ways to simulate this module.

13.2.1 Requirements

Place a .sgn file in the directory `\vhdl_simulation\input_files\` and rename it to `SIGNAL.sgn`

13.2.2 Option 1

Execute the batch file `simulation.bat`, located in the directory `\vhdl_simulation\` in this repository.

13.2.3 Option 2

Open the **Command Line** and navigate to your project folder (where the .vhd file is located). Execute the following commands:

```
ghdl -a -std=08 signal_processing.vhd
ghdl -a -std=08 vhdl_simulation.vhd
ghdl -e -std=08 vhdl_simulation
ghdl -r -std=08 vhdl_simulation
```

Additional information: The first two commands are used to compile the program and will generate .cf files. Do not remove these file until the simulation is complete.

The third command is used to elaborate the simulation.

The last command is used to run the simulation. If you want to simulate the same program again, you will just need to execute this command (as long as you don't delete the .cf files).

13.2.4 Simulation Output

The simulation will output the file `SIGNAL.sgn`. This file will contain all the processed binary information of the input file, with the header.

