


DESIGN STATUS

BENCH-VALIDATED

- Battery -> fuse -> switch power path
- MDD10A PWM/DIR static routing
- MDD10A DIR/PWM 10k pull-downs; reset capture PASS
- Dual encoder conditioning and hand-count
- STM32 <-> ESP32 UART, 115200 8N1

TBD / CANDIDATE

- RevB permanent wiring continuity
- Board power / USB backfeed policy
- Physical E-stop K1/K2/S0/S2 implementation
- Final F1/K1/main-wire rating
- Vehicle left/right powered channel assignment
- BNO085 power and I2C wiring

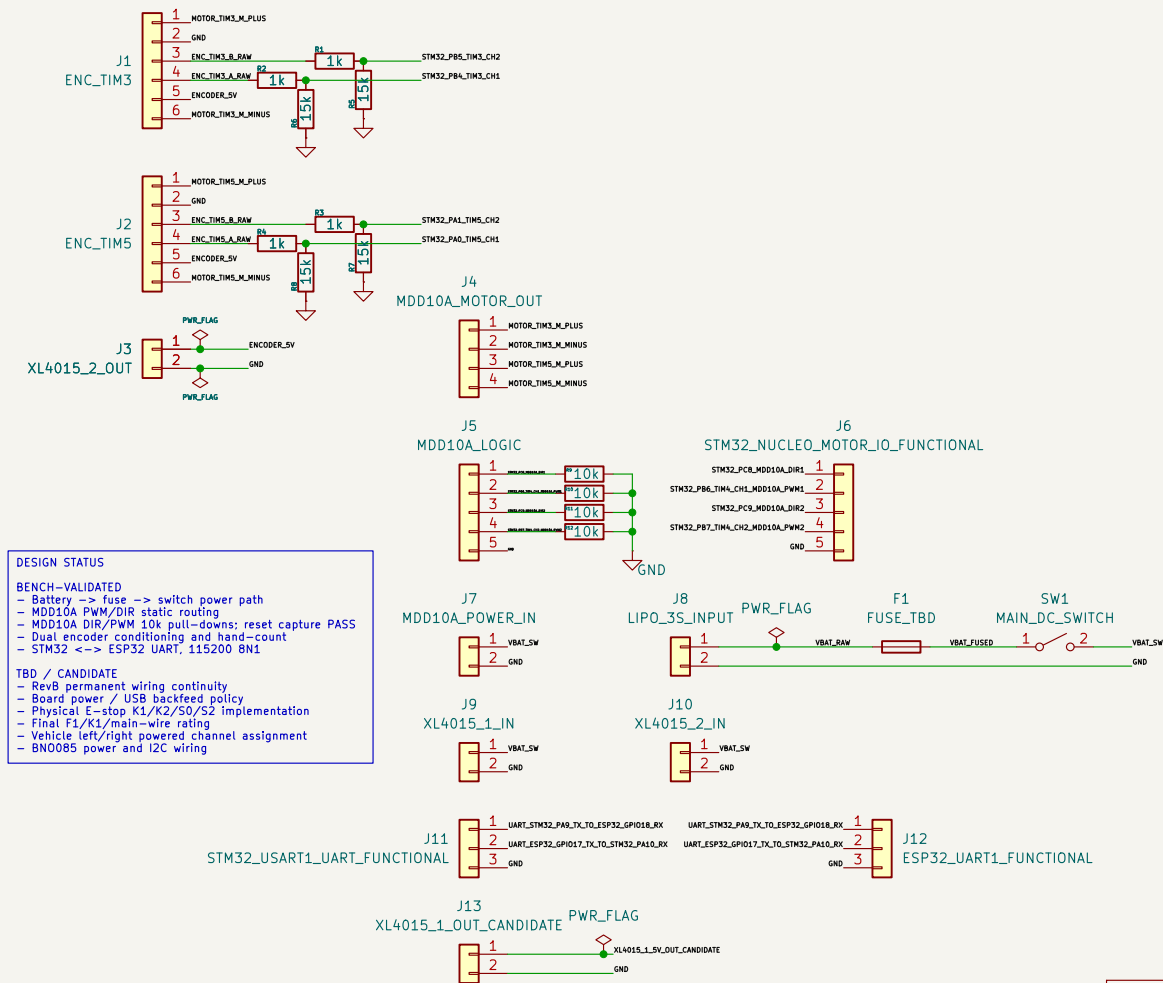

MDD10A reset-safe 10 kOhm pull-downs integrated; E-stop/power TBD
Status: WIP - Pull-down checkpoint

Sheet: /
File: Tracked_Mobile_Robot_Wiring_RevB.kicad_sch

Title: Tracked Mobile Robot Wiring

Size: A4 Date: 2026-08-12 Rev: RevB-WIP
KiCad E.D.A. 10.0.5 Id: 1/1