



100% KIWI OWNED
& OPERATED




VENT-TECH

VENTILATION TECHNOLOGY & PRODUCTS



QUALITY
PRODUCTS



INNOVATIVE
SOLUTIONS




SUPERIOR
PERFORMANCE




RELIABLE
SYSTEMS



BUILT FOR
NZ CONDITIONS



SUPPORTING
NEW ZEALAND

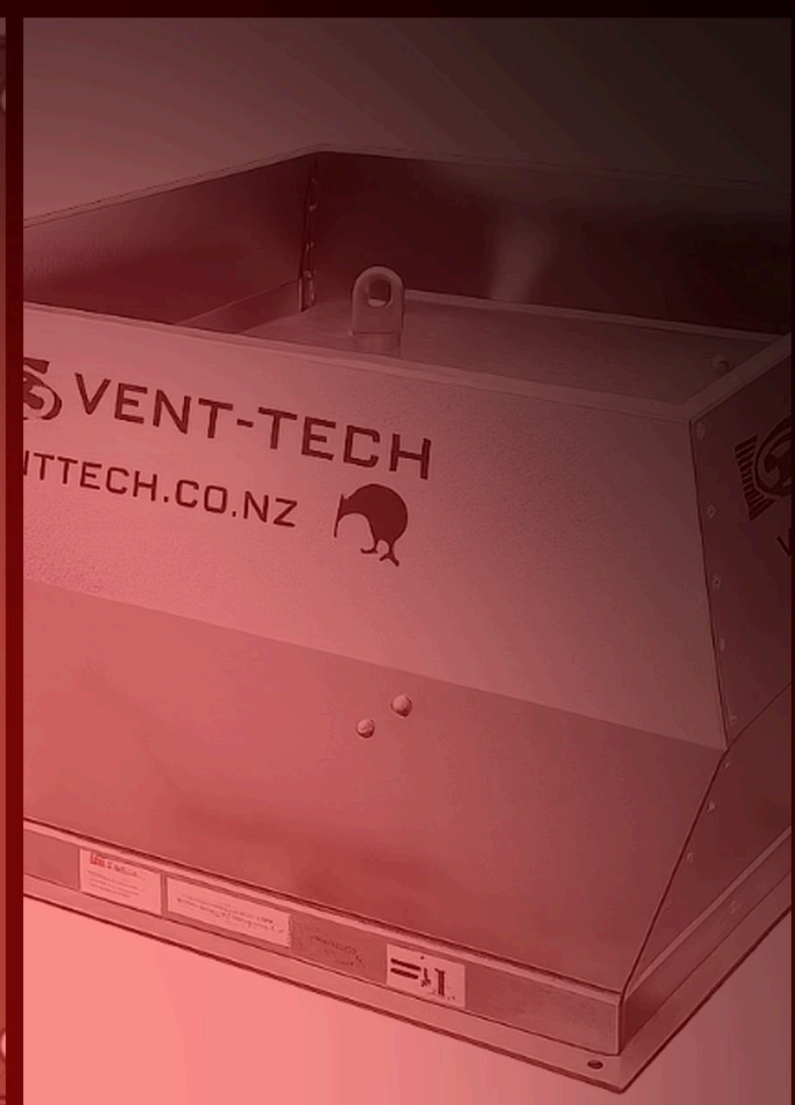

VENT-TECH

Contact Details



General office: 04 595 1403



Website

www.venttech.co.nz



Orders and enquiries

admin@venttech.co.nz

OUR LOCATION


Upper Hutt

576c Fergusson Drive, Upper Hutt 5018, Wellington

Vent-Tech head office and support



Shop front

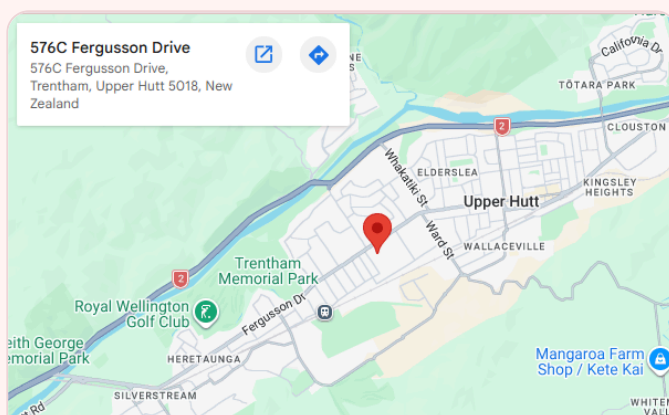

Map

Series groups

A series  The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development. Pages 5-9	ABC No image Side mounted, vertical discharge Pages 10-13	B series No image desc1 Pages 14-17
---	---	---

FAN

A series

3 PRODUCTS/SIZES



Fans



A series

Specifications: The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

Impellers: Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

Motor: Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

Plate: Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

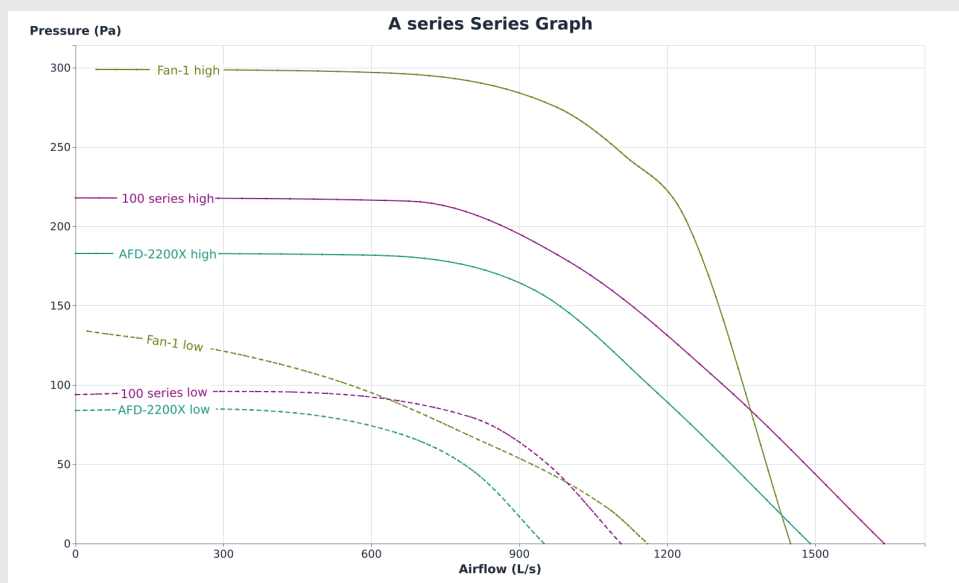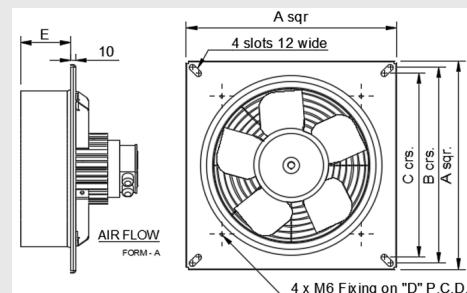

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
100 series	Wall mounted	Horizontal discharge	—	0 - 218 Pa	0 - 1640 L/s	57 - 82 dB	1.22 - 3 kW
AFD-2200X	—	—	560 mm	0 - 183 Pa	0 - 1490 L/s	—	—
Fan-1	—	—	—	0 - 299 Pa	24 - 1450 L/s	—	—



Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

Sizes

400, 450, 500, 560, 630mm diameter

Fan performance

The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

MAIN

Mounting style	Wall mounted
Discharge type	Horizontal discharge

IMPELLER


Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR






Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	—
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

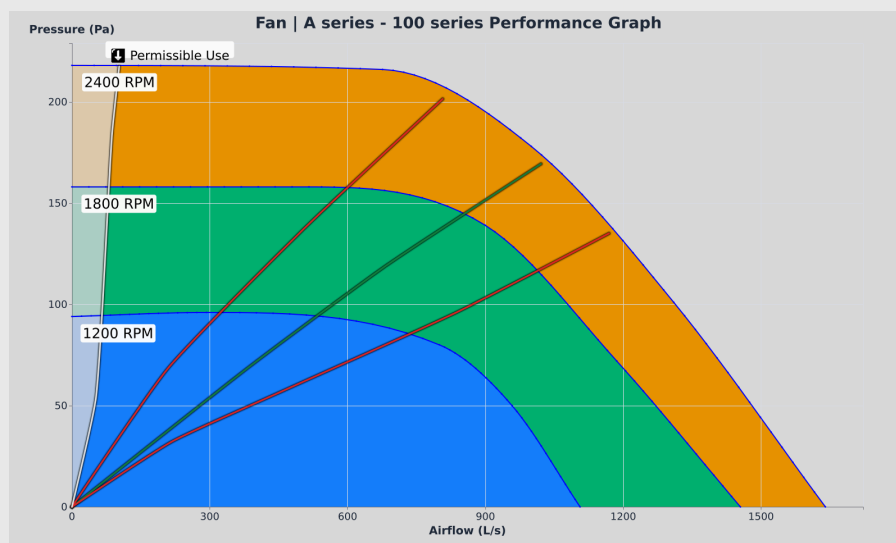

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1200	574	1.22	41	51	62	75	74	68	65	61	59	57
1800	778	1.92	47	55	66	79	78	72	69	65	63	61
2400	1046	3	55	58	69	82	81	75	72	68	66	64

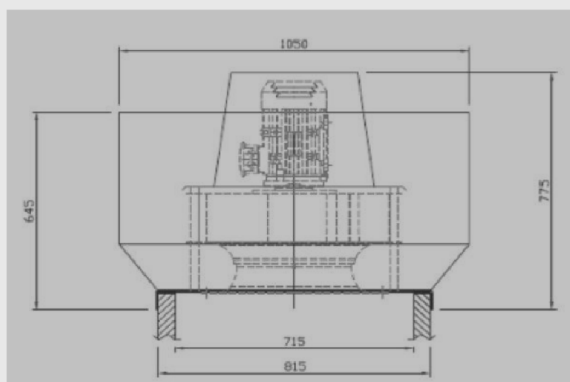



Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

Sizes

Not provided.

Fan performance

Not provided.

IMPELLER

Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR

Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor

FAN


Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C



Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
1500												
2100												

No product images available.

No product image available.



Description

Desc1 test

Applications

Desc2 test

Sizes

Desc3 test

Fan performance

Not provided.

IMPELLER


Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR

Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	—
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

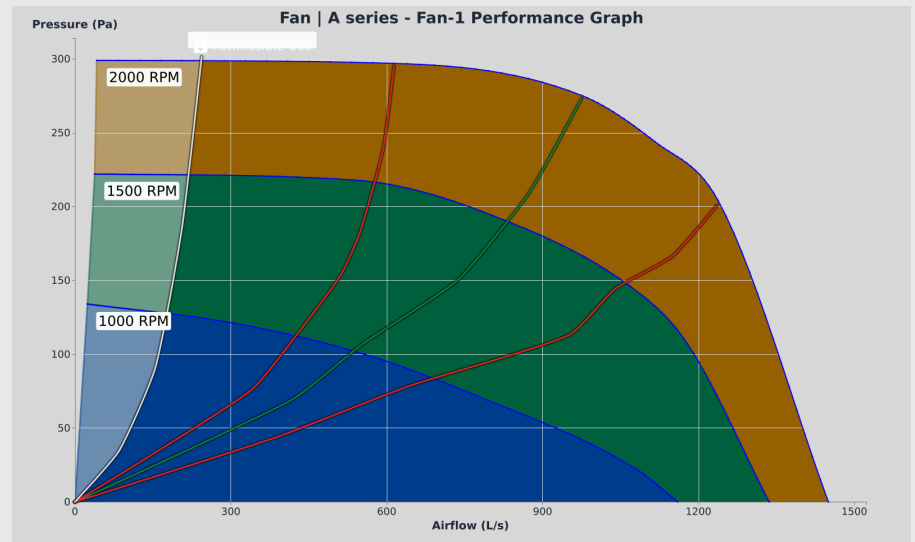

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
1500												
2000												

No product images available.

No product image available.

FAN

ABC


2 PRODUCTS/SIZES



- Specifications:** Side mounted, vertical discharge
- Impellers:** Slightly limited size range, but optimised for its purpose
- Motor:** Better suited to large current draw applications, and operation in dusty environments
- Plate:** A different kettle of fish than the other series



No secondary series image available

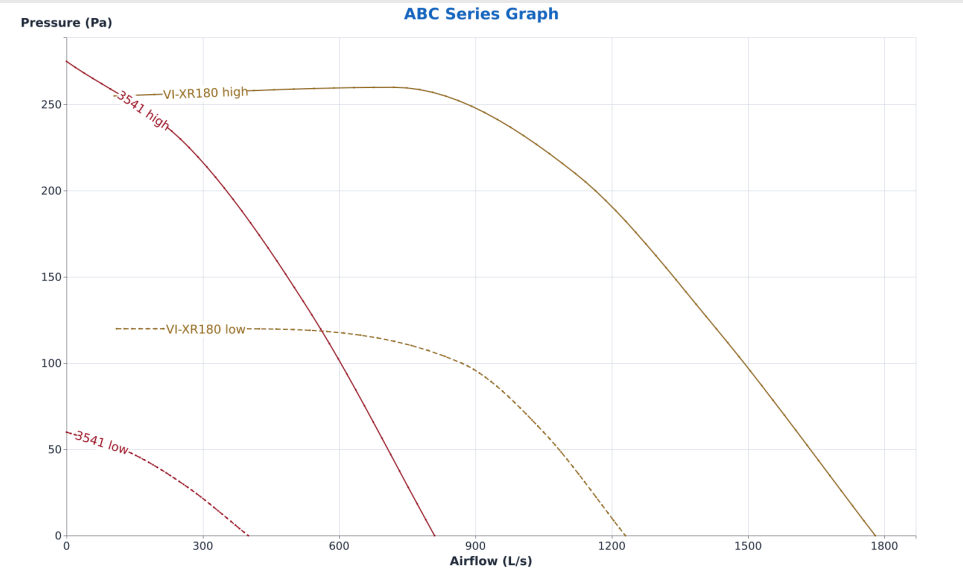

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
3541	—	—	—	0 - 275 Pa	0 - 810 L/s	—	—
VI-XR180	—	—	—	0 - 260 Pa	95 - 1780 L/s	—	—




Description
Not provided.

Applications
Not provided.

Sizes
Not provided.

Fan performance
Not provided.


MAIN	
Mounting style	—
Discharge type	—
IMPELLER	
Size	—
Material	—

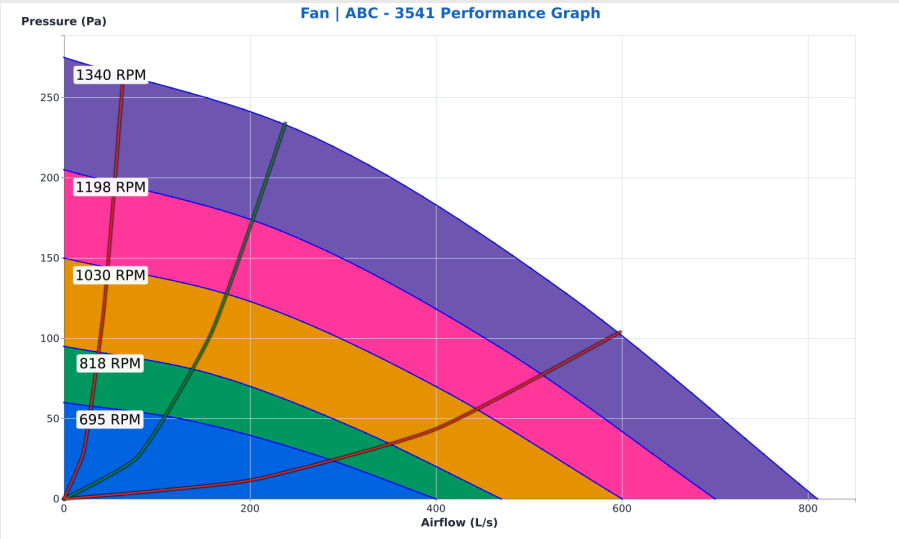

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
695												
818												
1030												
1198												
1340												

No product images available.

No product image available.



No grouped specifications available.

Description

desc 1

Applications


desc 2

Sizes

desc 3

Fan performance

desc 4

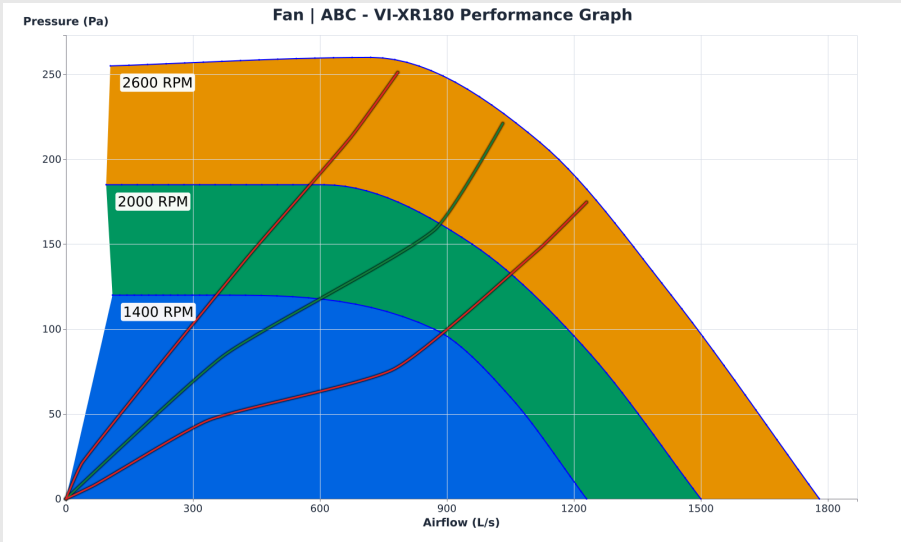

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1400												
2000												
2600												

No product images available.

No product image available.

FAN

B series

2 PRODUCTS/SIZES

No primary series image available

Fans

B series

Specifications: desc1


Impellers: desc2

Motor: desc3


Plate: desc4

No primary
series image
available

No secondary
series image
available

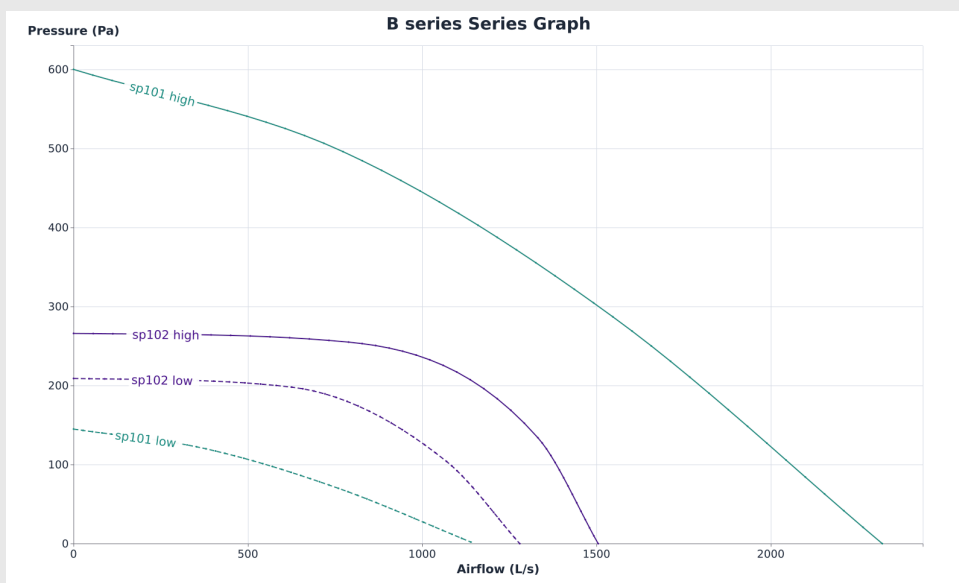

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
sp101	—	—	—	0 - 600 Pa	0 - 2320 L/s	—	—
sp102	—	—	—	0 - 266 Pa	0 - 1505 L/s	—	—



Description
Not provided.

Applications
Not provided.

Sizes
Not provided.

Fan performance
Not provided.


MAIN	
Mounting style	—
Discharge type	—
IMPELLER	
Size	—



Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
670												
788												
993												
1155												
1340												

No product images available.

No product image available.




Description
Not provided.

Applications
Not provided.

Sizes
Not provided.

Fan performance
Not provided.

MAIN	
Mounting style	—
Discharge type	—
IMPELLER	
Size	—

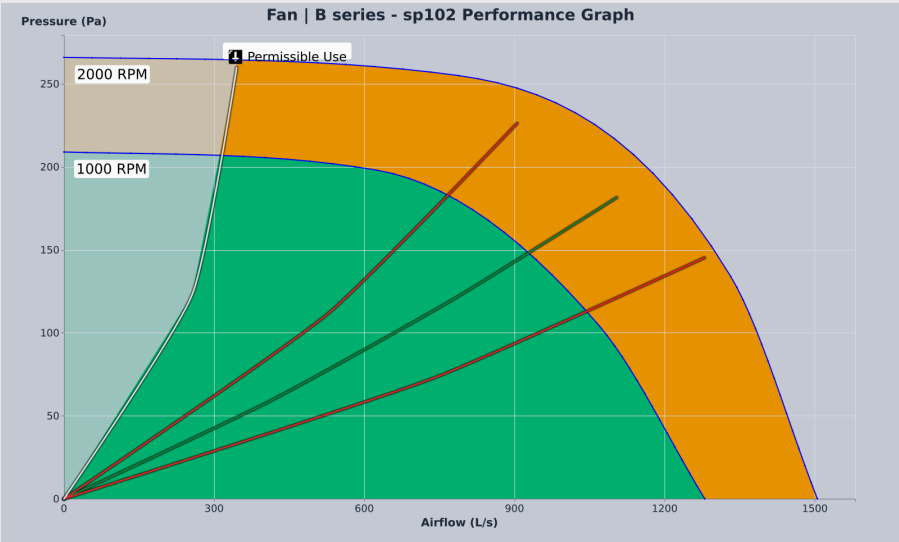

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
2000												

No product images available.

No product image available.