

**FAN**

# **A series**

**3 PRODUCTS/SIZES**



# Fans



## A series

**Specifications:** The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

**Impellers:** Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

**Motor:** Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

**Plate:** Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

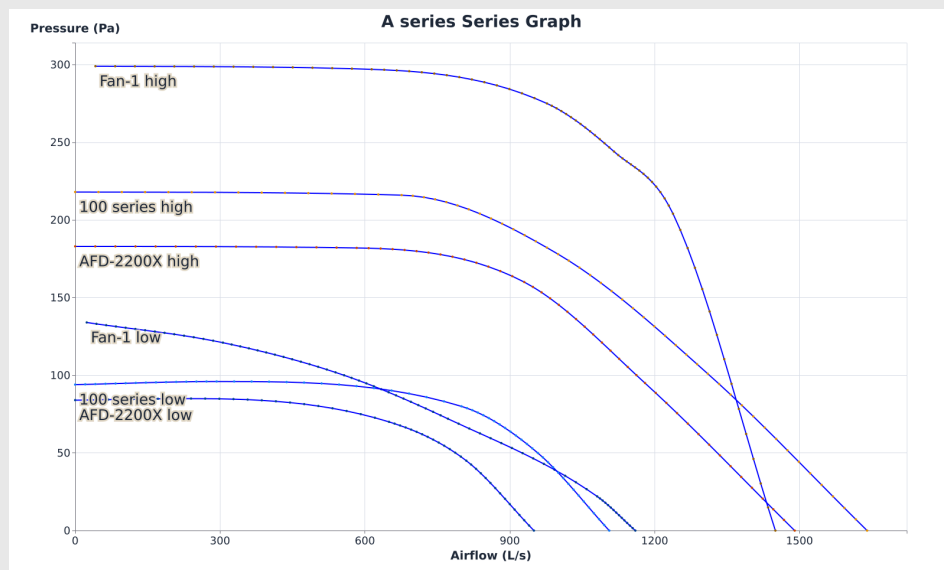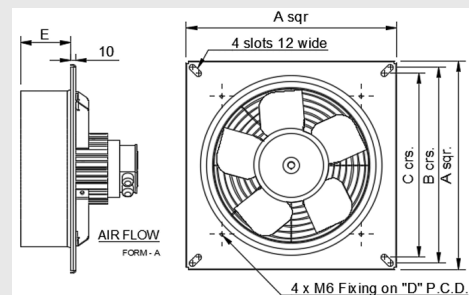

| Model      | Mounting style | Discharge type       | Impeller size | Pressure Range | Airflow Range | SWL Range  | Power Range |
|------------|----------------|----------------------|---------------|----------------|---------------|------------|-------------|
| 100 series | Wall mounted   | Horizontal discharge | —             | 0 - 218 Pa     | 0 - 1640 L/s  | 57 - 82 dB | 1.22 - 3 kW |
| AFD-2200X  | —              | —                    | 560 mm        | 0 - 183 Pa     | 0 - 1490 L/s  | —          | —           |
| Fan-1      | —              | —                    | —             | 0 - 299 Pa     | 24 - 1450 L/s | —          | —           |



## Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

## Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

## Sizes

400, 450, 500, 560, 630mm diameter

## Fan performance

The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

### MAIN

|                |                      |
|----------------|----------------------|
| Mounting style | Wall mounted         |
| Discharge type | Horizontal discharge |

### IMPELLER


|              |                |
|--------------|----------------|
| Size         | —              |
| Type         | Backward curve |
| Material     | —              |
| Motor finish | —              |

### MOTOR






|              |   |
|--------------|---|
| Type         | — |
| IP Rating    | — |
| Insulation   | — |
| Power        | — |
| Power Supply | — |
| Speed        | — |
| FLC          | — |
| Capacitor    | — |
| Control      | — |
| Protection   | — |


### FAN

|           |   |
|-----------|---|
| Plate     | — |
| Weight    | — |
| Max. Temp | — |

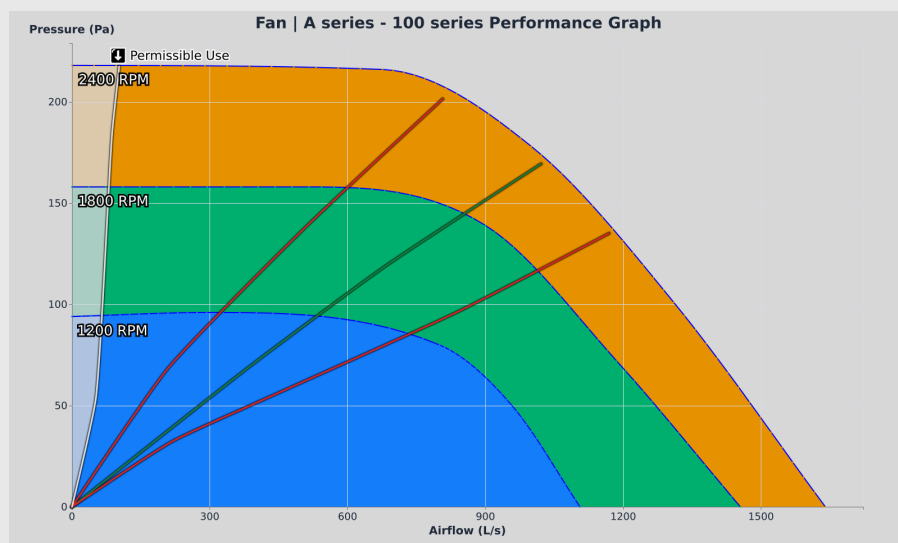

| Speed (rpm) | Peak Pressure (Pa) | Peak Power (kW) | Running Frequency (Hz) | Sound Pressure Level (dB) @ 3 meters | Sound (Hz) Power Level (dB) SWL re 1pw |     |     |     |    |    |    |    |
|-------------|--------------------|-----------------|------------------------|--------------------------------------|----------------------------------------|-----|-----|-----|----|----|----|----|
|             |                    |                 |                        |                                      | 63                                     | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| 2400        | 1046               | 3               | 55                     | 58                                   | 69                                     | 82  | 81  | 75  | 72 | 68 | 66 | 64 |
| 1800        | 778                | 1.92            | 47                     | 55                                   | 66                                     | 79  | 78  | 72  | 69 | 65 | 63 | 61 |
| 1200        | 574                | 1.22            | 41                     | 51                                   | 62                                     | 75  | 74  | 68  | 65 | 61 | 59 | 57 |

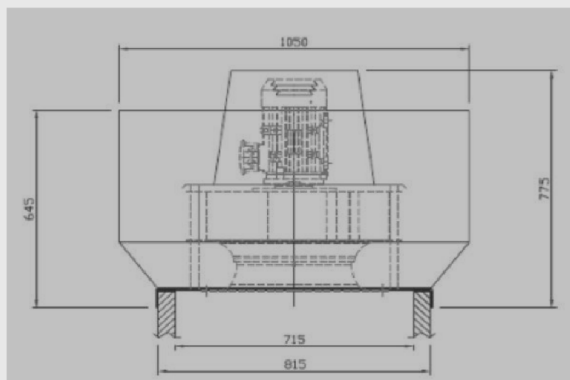



## Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

## Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

## Sizes

*Not provided.*

## Fan performance

*Not provided.*

### IMPELLER


|              |                |
|--------------|----------------|
| Size         | 560 mm         |
| Type         | Backward curve |
| Material     | Steel          |
| Motor finish | Powder coat    |

### MOTOR

|              |                      |
|--------------|----------------------|
| Type         | IE2                  |
| IP Rating    | 55                   |
| Insulation   | Class 155            |
| Power        | 3 kW                 |
| Power Supply | 400V/3PH/50Hz        |
| Speed        | 1415 RPM             |
| FLC          | —                    |
| Capacitor    | 6.4 A                |
| Control      | Variable Speed Drive |
| Protection   | Thermistor           |

### FAN


|           |                  |
|-----------|------------------|
| Plate     | Galvanised steel |
| Weight    | 139 kg           |
| Max. Temp | 50 °C            |

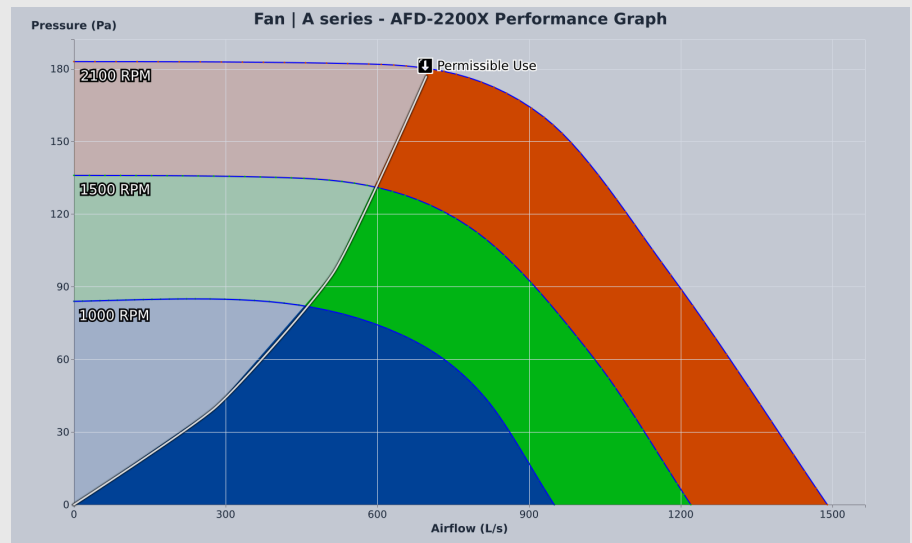

| Speed (rpm) | Peak Pressure (Pa) | Peak Power (kW) | Running Frequency (Hz) | Sound Pressure Level (dB) @ 3 meters | Sound (Hz) Power Level (dB) SWL re 1pw |     |     |     |    |    |    |    |
|-------------|--------------------|-----------------|------------------------|--------------------------------------|----------------------------------------|-----|-----|-----|----|----|----|----|
|             |                    |                 |                        |                                      | 63                                     | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| 2100        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |
| 1500        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |
| 1000        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |

*No product images available.*

*No product image available.*



## Description

Desc1 test

## Applications

Desc2 test

## Sizes

Desc3 test

## Fan performance

Not provided.

### IMPELLER


|              |                |
|--------------|----------------|
| Size         | —              |
| Type         | Backward curve |
| Material     | —              |
| Motor finish | —              |

### MOTOR

|              |   |
|--------------|---|
| Type         | — |
| IP Rating    | — |
| Insulation   | — |
| Power        | — |
| Power Supply | — |
| Speed        | — |
| FLC          | — |
| Capacitor    | — |
| Control      | — |
| Protection   | — |

### FAN

|           |   |
|-----------|---|
| Plate     | — |
| Weight    | — |
| Max. Temp | — |

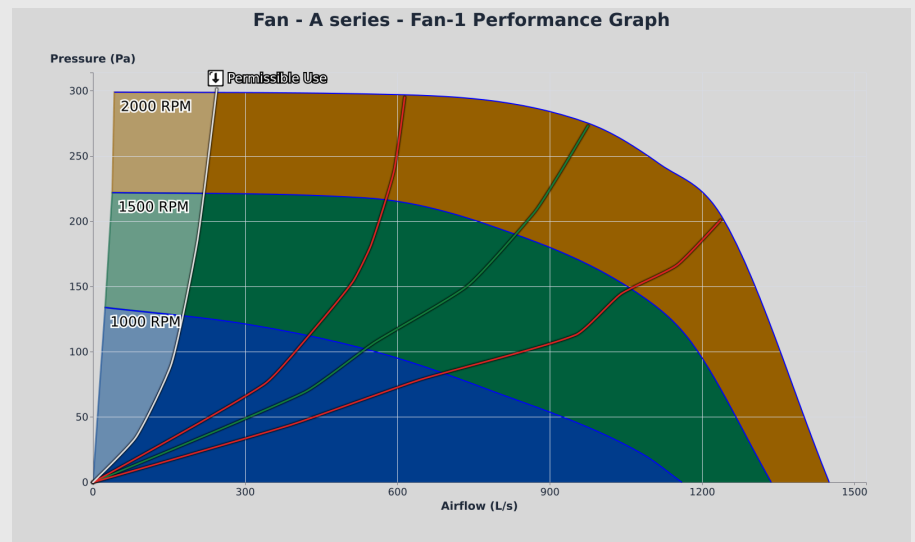

| Speed (rpm) | Peak Pressure (Pa) | Peak Power (kW) | Running Frequency (Hz) | Sound Pressure Level (dB) @ 3 meters | Sound (Hz) Power Level (dB) SWL re 1pw |     |     |     |    |    |    |    |
|-------------|--------------------|-----------------|------------------------|--------------------------------------|----------------------------------------|-----|-----|-----|----|----|----|----|
|             |                    |                 |                        |                                      | 63                                     | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| 1000        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |
| 1500        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |
| 2000        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |

No product images available.

No product image available.