


100 series

FAN

A series



FAN PERFORMANCE GRAPH

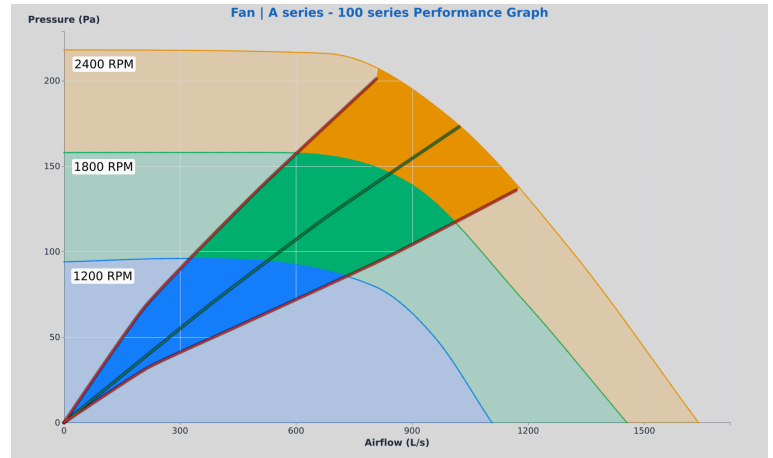

Wall mounted
MOUNTING STYLE



Horizontal discharge
DISCHARGE TYPE



Backward curve
TYPE



400V/3PH/50Hz
POWER SUPPLY

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

400. 450. 500. 560. 630 mm diameter

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

The fan is of low noise and high static efficiency design. The impeller is designed



MAIN

Mounting style	Wall mounted
Discharge type	Horizontal discharge



IMPELLER

Size	—
Type	Backward curve
Material	—
Motor finish	—



MOTOR

Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	400V/3PH/50Hz
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—



FAN

Plate	—
Weight	—
Max. Temp	—

PERFORMANCE DATA

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1200			120									
1800			180									
2400			240									

OVERALL DIMENSIONS (MM)

