# 100 series

## FAN

A series

## FAN PERFORMANCE GRAPH

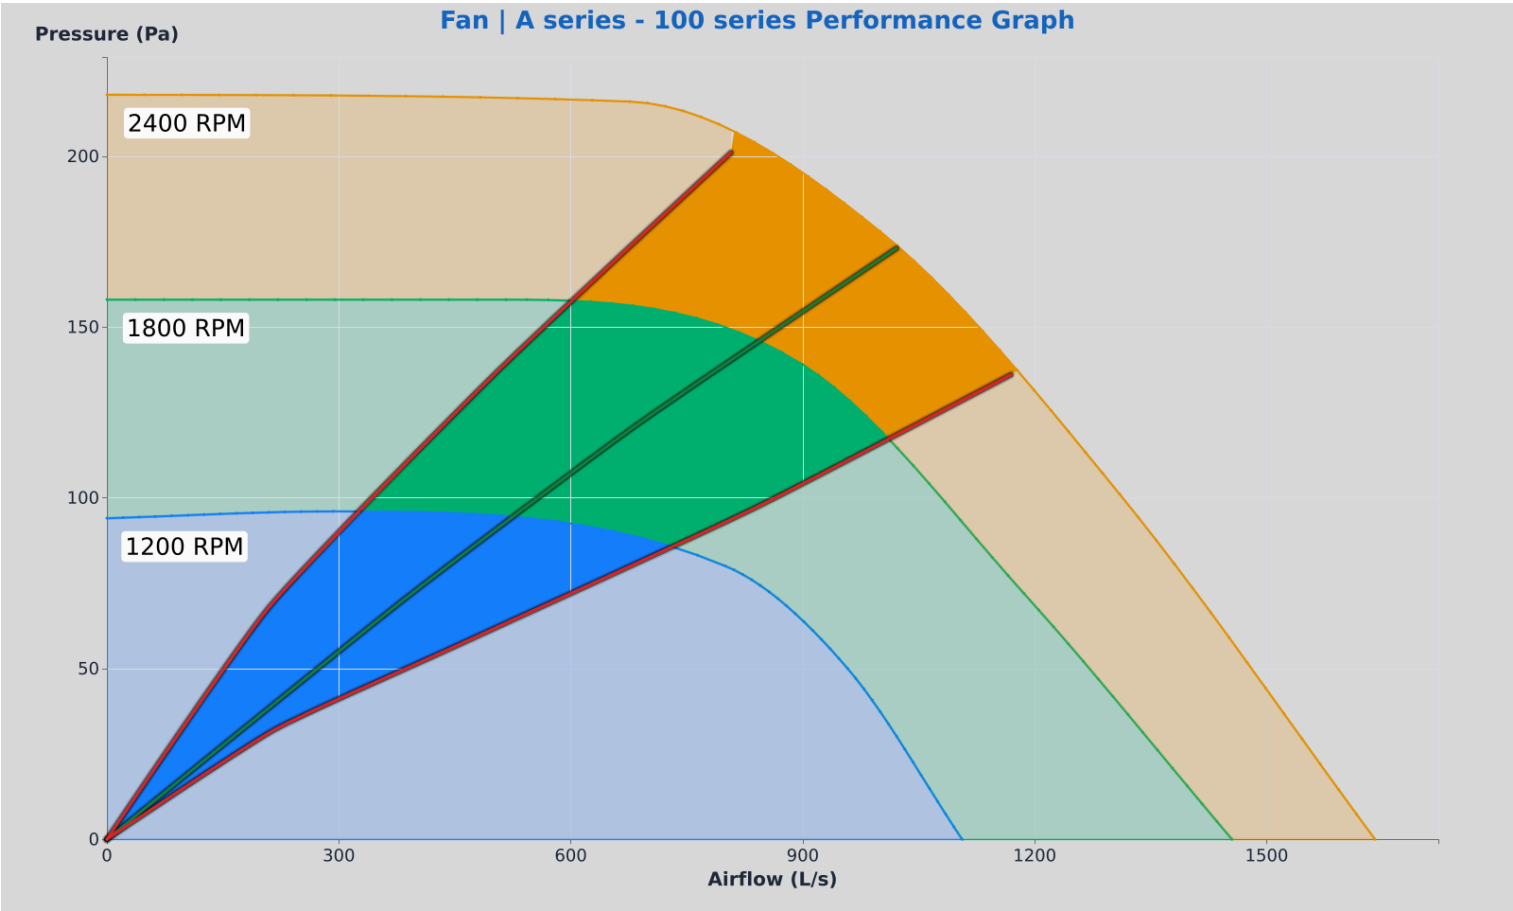

**Wall mounted**
MOUNTING STYLE

**Horizontal discharge**
DISCHARGE TYPE

**Backward curve**
TYPE

**400V/3PH/50Hz**
POWER SUPPLY

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

400, 450, 500, 560, 630 mm diameter

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

The fan is of low noise and high static efficiency design. The impeller is designed

### MAIN

| | |
|---|---|
| **Mounting style** | Wall mounted |
| **Discharge type** | Horizontal discharge |

### IMPELLER

| | |
|---|---|
| **Size** | — |
| **Type** | Backward curve |
| **Material** | — |
| **Motor finish** | — |

### MOTOR

| | |
|---|---|
| **Type** | — |
| **IP Rating** | — |
| **Insulation** | — |
| **Power** | — |
| **Power Supply** | 400V/3PH/50Hz |
| **Speed** | — |
| **FLC** | — |
| **Capacitor** | — |
| **Control** | — |
| **Protection** | — |

### FAN

| | |
|---|---|
| **Plate** | — |
| **Weight** | — |
| **Max. Temp** | — |

## PERFORMANCE DATA

| Speed (rpm) | Peak Pressure (Pa) | Peak Power (kW) | Running Frequency (Hz) | Sound Pressure Level (dB) @ 3 meters | Sound (Hz) Power Level (dB) SWL re 1pw | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| 1200 | | | 120 | | | | | | | | | |
| 1800 | | | 180 | | | | | | | | | |
| 2400 | | | 240 | | | | | | | | | |

## OVERALL DIMENSIONS (MM)