


A series



Pressure (Pa)

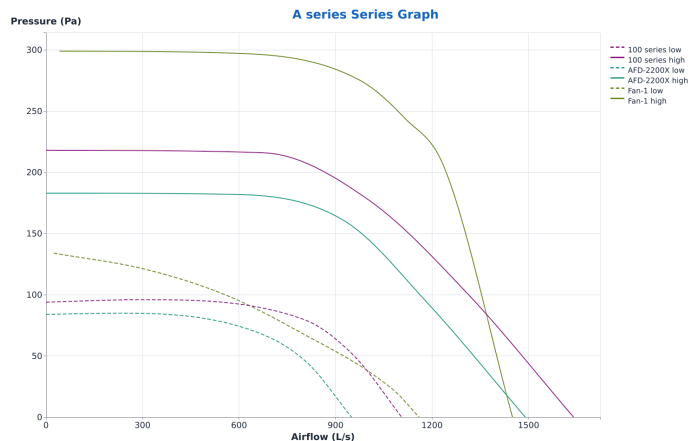

Specifications

The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

Impellers

Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

Motor

Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

Case


Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

Testing

Products: 3
Performance: Highest and lowest line from each product

PERFORMANCE TABLE

Model	Main: Mounting style	Main: Discharge type	Impeller: Size	Pressure Range	Airflow Range	FLC	RPM	Power
A series-100 series	Wall mounted	Horizontal discharge	—	0 - 218 Pa	0 - 1640 L/s	—	—	—
A series-AFD-2200X	—	—	560 mm	0 - 183 Pa	0 - 1490 L/s	—	1415 RPM	3 kW
A series-Fan-1	—	—	—	0 - 299 Pa	24 - 1450 L/s	—	—	—

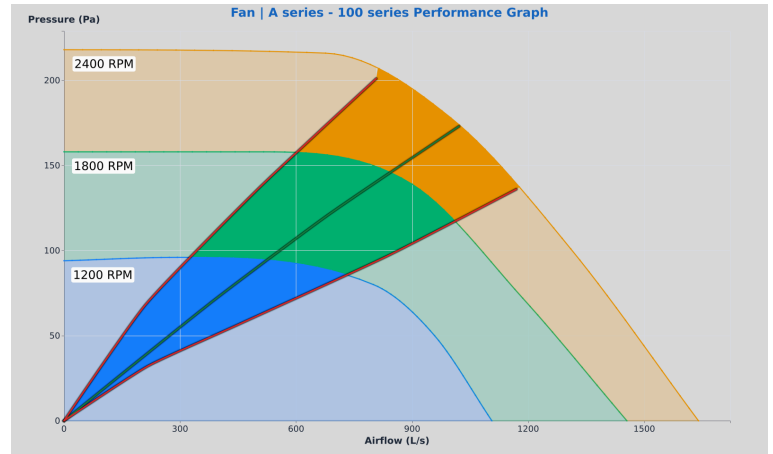

- ◆ **Wall mounted**
MOUNTING STYLE
- ⚡ **Horizontal discharge**
DISCHARGE TYPE
- ⬢ **Backward curve**
TYPE
- ◇ **400V/3PH/50Hz**
POWER SUPPLY

MAIN

Mounting style	Wall mounted
Discharge type	Horizontal discharge

IMPELLER

Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR





Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	400V/3PH/50Hz
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

PERFORMANCE DATA

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1200			120									
1800			180									
2400			240									



A series - AFD-2200X



Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER

Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR



Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor

FAN


Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C



Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
1500												
2100												

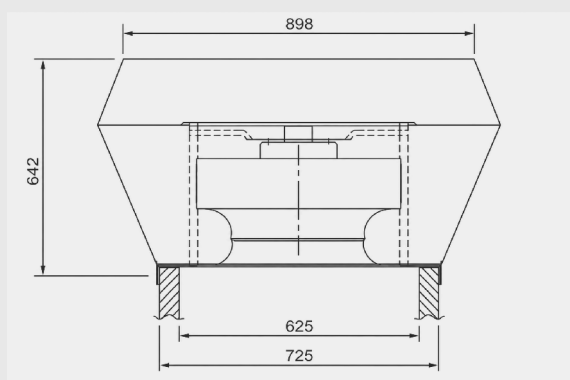

A series - Fan-1



Desc1 test

Desc2 test

Desc3 test

IMPELLER


Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR

Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	230V/1ph/50Hz
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

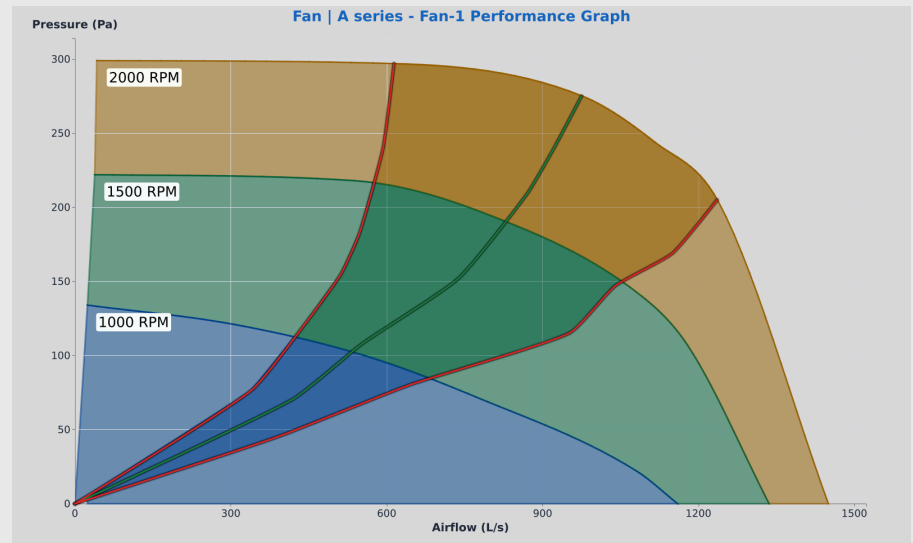

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Voltage (V)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000	69		50									
1500	79		100									
2000			150									

