

# A series - 100 series



Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

400, 450, 500, 560, 630 mm diameter

The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

## MAIN

|                       |                      |
|-----------------------|----------------------|
| <b>Mounting style</b> | Wall mounted         |
| <b>Discharge type</b> | Horizontal discharge |

## IMPELLER


|                     |                |
|---------------------|----------------|
| <b>Size</b>         | —              |
| <b>Type</b>         | Backward curve |
| <b>Material</b>     | —              |
| <b>Motor finish</b> | —              |

## MOTOR

|                     |   |
|---------------------|---|
| <b>Type</b>         | — |
| <b>IP Rating</b>    | — |
| <b>Insulation</b>   | — |
| <b>Power</b>        | — |
| <b>Power Supply</b> | — |
| <b>Speed</b>        | — |
| <b>FLC</b>          | — |
| <b>Capacitor</b>    | — |
| <b>Control</b>      | — |
| <b>Protection</b>   | — |

## FAN

|                  |   |
|------------------|---|
| <b>Plate</b>     | — |
| <b>Weight</b>    | — |
| <b>Max. Temp</b> | — |

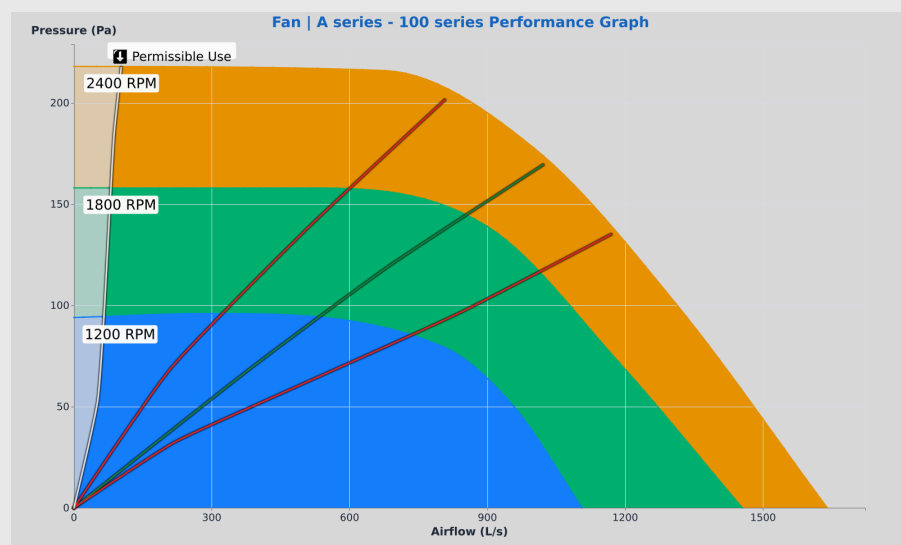

| Speed (rpm) | Peak Pressure (Pa) | Peak Power (kW) | Running Frequency (Hz) | Sound Pressure Level (dB) @ 3 meters | Sound (Hz) Power Level (dB) SWL re 1pw |     |     |     |    |    |    |    |
|-------------|--------------------|-----------------|------------------------|--------------------------------------|----------------------------------------|-----|-----|-----|----|----|----|----|
|             |                    |                 |                        |                                      | 63                                     | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| 1200        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |
| 1800        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |
| 2400        |                    |                 |                        |                                      |                                        |     |     |     |    |    |    |    |

