

FAN

ABC

2 PRODUCTS/SIZES



Specifications: Side mounted, vertical discharge


Impellers: Slightly limited size range, but optimised for its purpose

Motor: Better suited to large current draw applications, and operation in dusty environments


Plate: A different kettle of fish than the other series



No secondary series image available

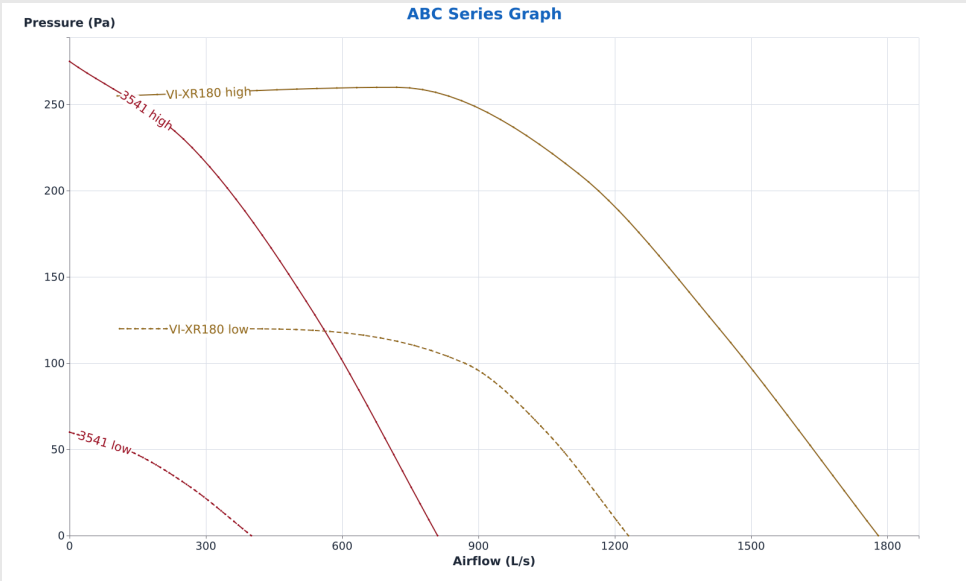

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
3541	—	—	—	0 - 275 Pa	0 - 810 L/s	—	—
VI-XR180	—	—	—	0 - 260 Pa	95 - 1780 L/s	—	—




Description
Not provided.

Applications
Not provided.

Sizes
Not provided.

Fan performance
Not provided.


MAIN	
Mounting style	—
Discharge type	—
IMPELLER	
Size	—
Material	—

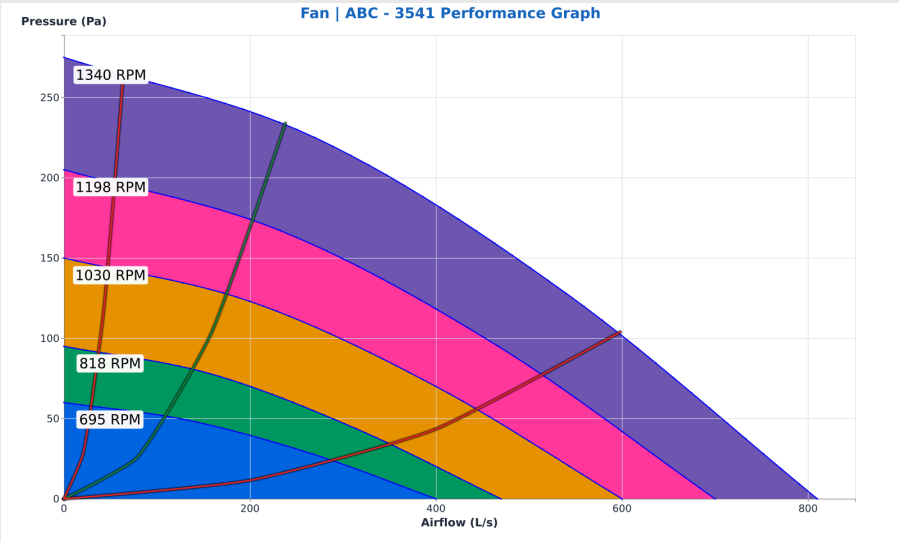

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
695												
818												
1030												
1198												
1340												

No product images available.

No product image available.



No grouped specifications available.

Description

desc 1

Applications


desc 2

Sizes

desc 3

Fan performance

desc 4

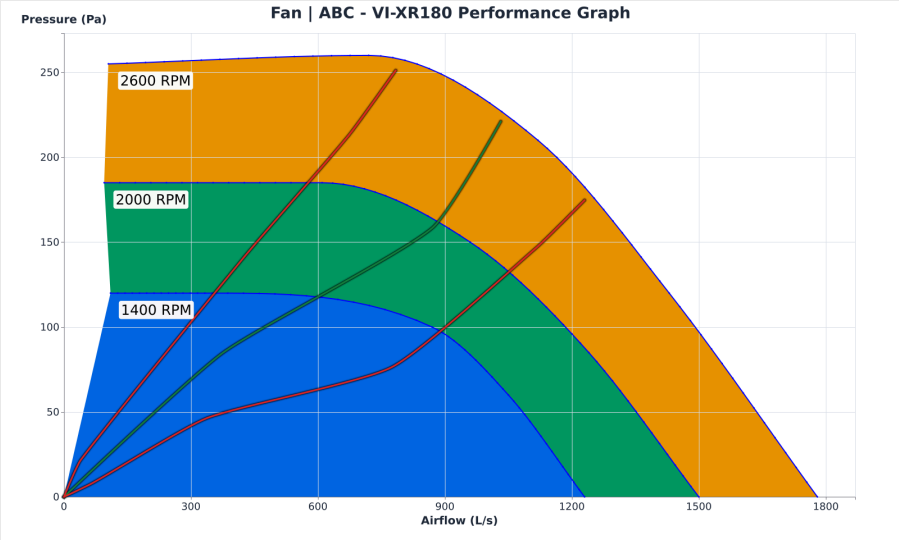

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1400												
2000												
2600												

No product images available.

No product image available.