



Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER


Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR

Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor

FAN

Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C

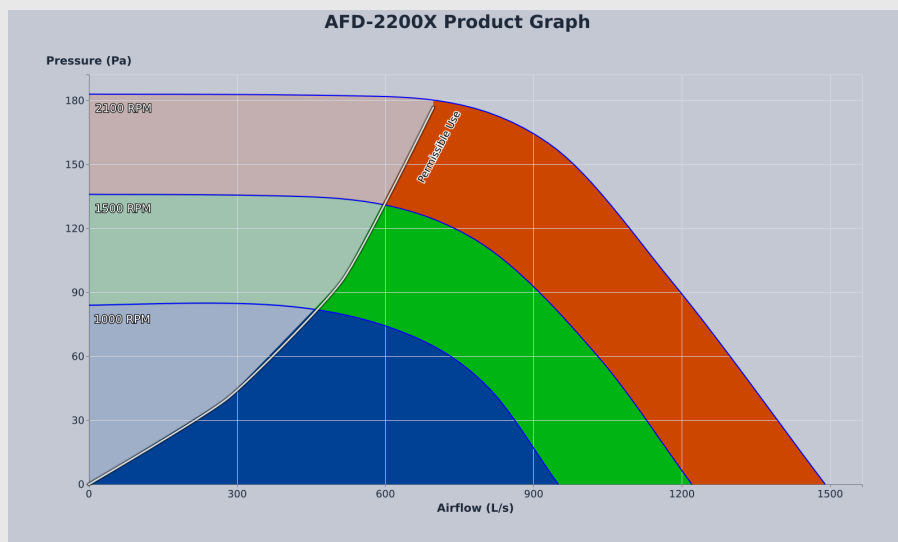

Fan Acoustic Table

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
2100												
1500												
1000												



Fan

A series

AFD-2200X

Fan · A series



**AFD-
2200X**