



100% KIWI OWNED
& OPERATED




VENT-TECH

VENTILATION TECHNOLOGY & PRODUCTS



QUALITY
PRODUCTS




INNOVATIVE
SOLUTIONS




SUPERIOR
PERFORMANCE




RELIABLE
SYSTEMS



BUILT FOR
NZ CONDITIONS



SUPPORTING
NEW ZEALAND

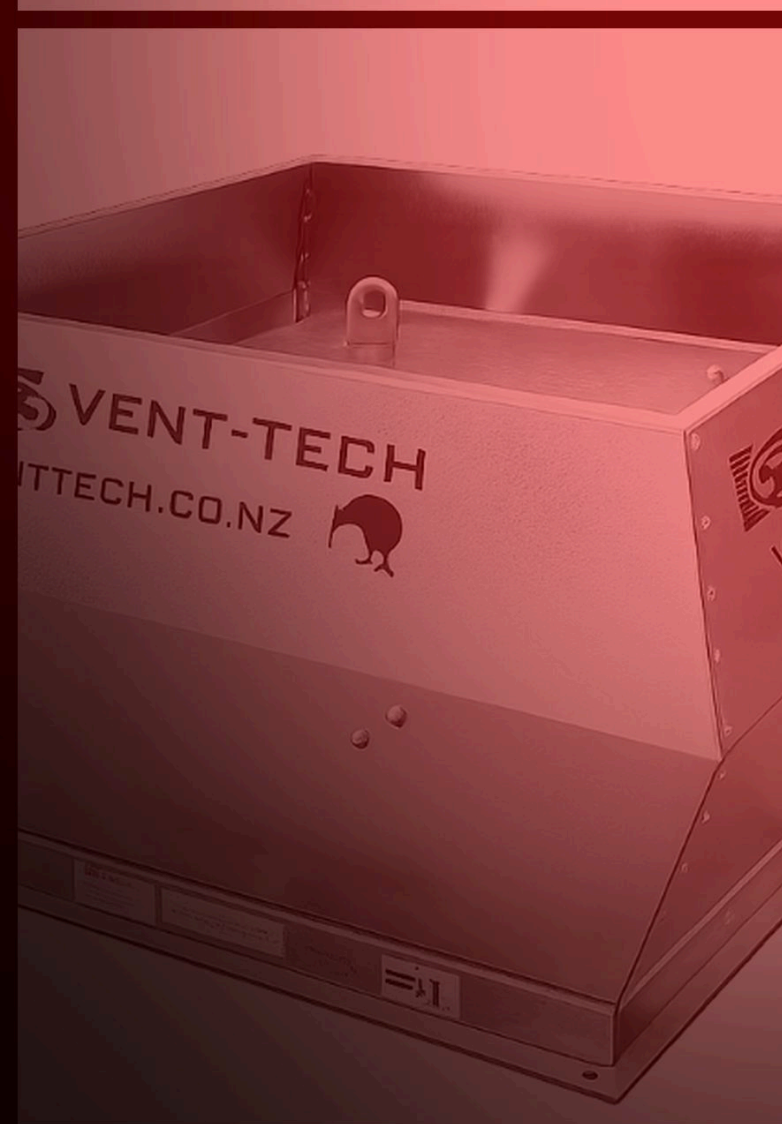

VENT-TECH Contact Details



General office: 04 595 1403



Website

www.venttech.co.nz



Orders and enquiries

admin@venttech.co.nz



Product finder

www.venttech.co.nz/products


OUR LOCATION

Upper Hutt

576c Fergusson Drive, Upper Hutt 5018, Wellington



Shop front

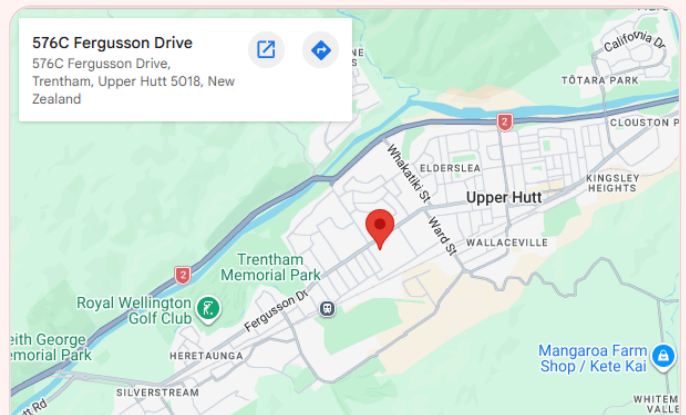

Map

Series groups

B series Pages 5-10 No image test 123 abc hello bye	A series Pages 11-16  No description provided.	ABC Pages 17-22 No image this is my contents page description
--	---	---

B series

B series


A series

ABC




Fans - B series


desc1
desc2
desc3
desc4

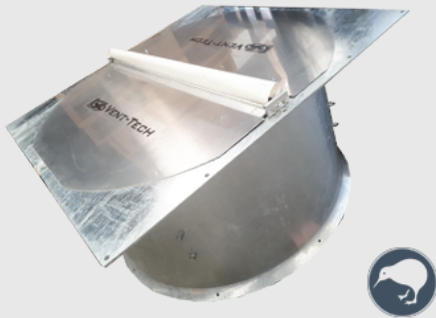


Series image unavailable

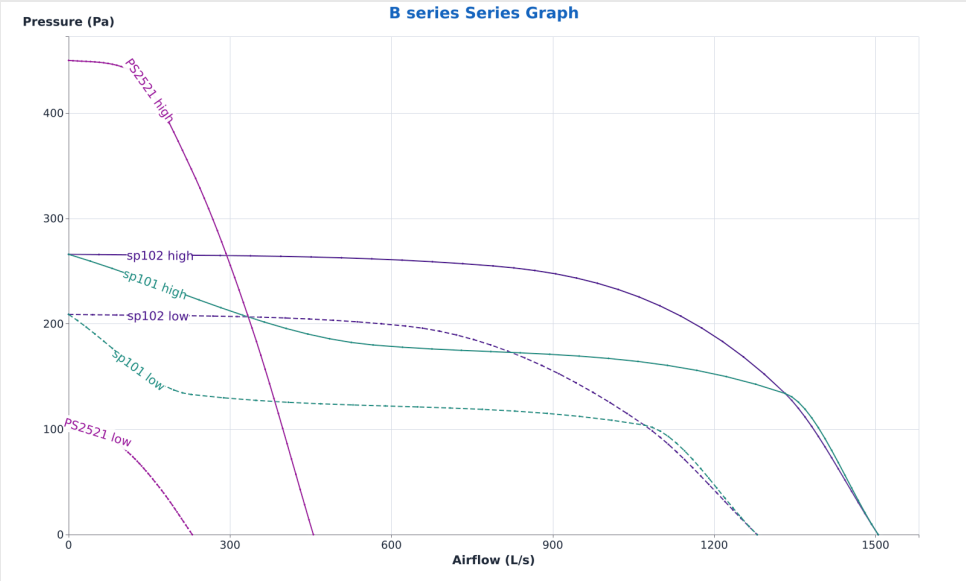

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
PS2521	—	—	—	0 - 450 Pa	0 - 455 L/s	—	—
sp101	—	—	—	0 - 266 Pa	0 - 1505 L/s	—	—
sp102	—	—	—	0 - 266 Pa	0 - 1505 L/s	—	—



No grouped specifications available.

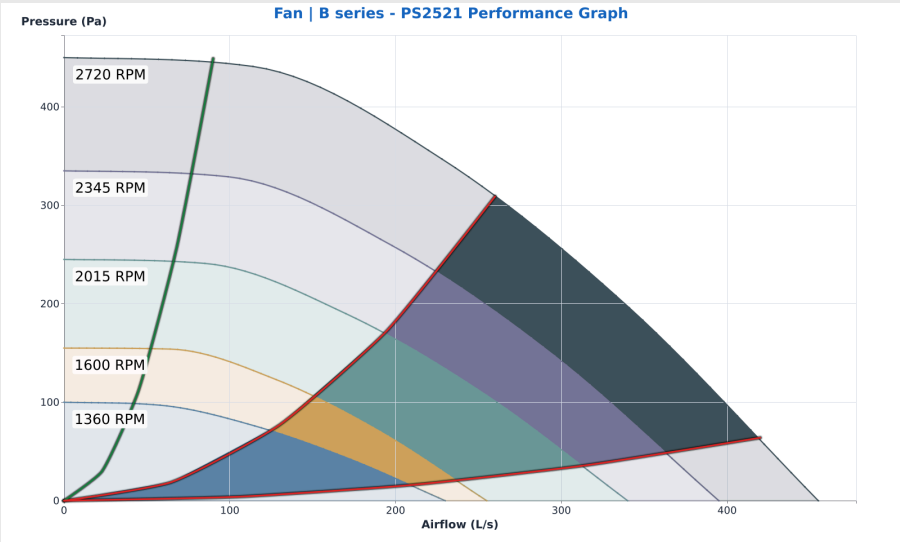


Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1360												
1600												
2015												
2345												
2720												

No product images available.

No product image available.




MAIN	
Mounting style	—
Discharge type	—
IMPELLER	
Size	—
Material	—

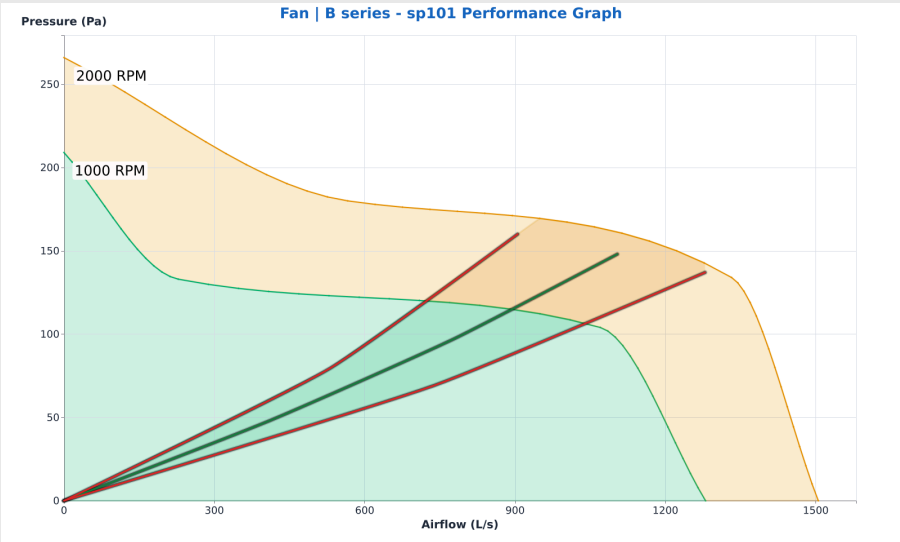

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
2000												

No product images available.

No product image available.




MAIN

Mounting style

Discharge type

IMPELLER

Size

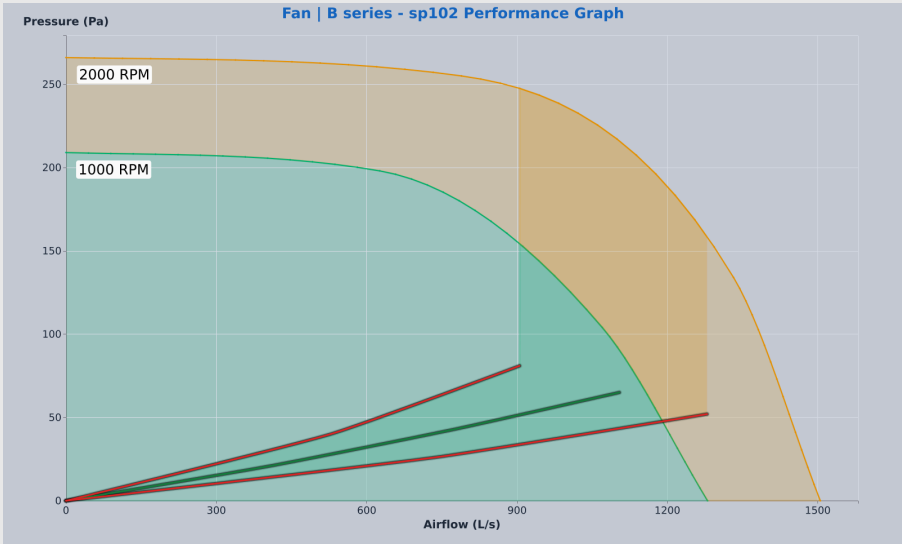

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
2000												

No product images available.

No product image available.

A series

B series

A series

ABC





Fans - A series

The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

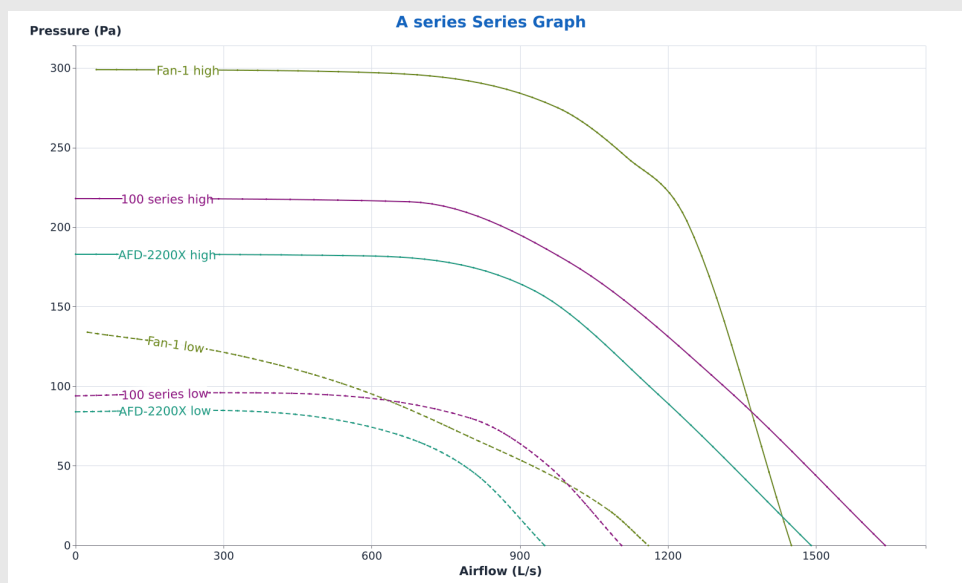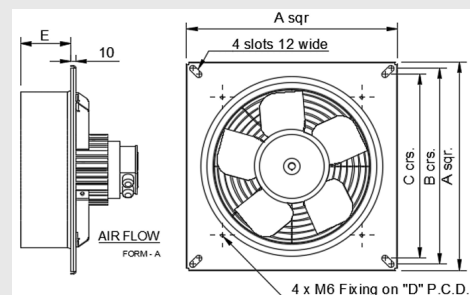

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
100 series	Wall mounted	Horizontal discharge	—	0 - 218 Pa	0 - 1640 L/s	—	—
AFD-2200X	—	—	560 mm	0 - 183 Pa	0 - 1490 L/s	—	—
Fan-1	—	—	—	0 - 299 Pa	24 - 1450 L/s	—	—

A series - 100 series



Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

400, 450, 500, 560, 630 mm diameter

The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

MAIN

Mounting style	Wall mounted
Discharge type	Horizontal discharge

IMPELLER


Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR






Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	400V/3PH/50Hz
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

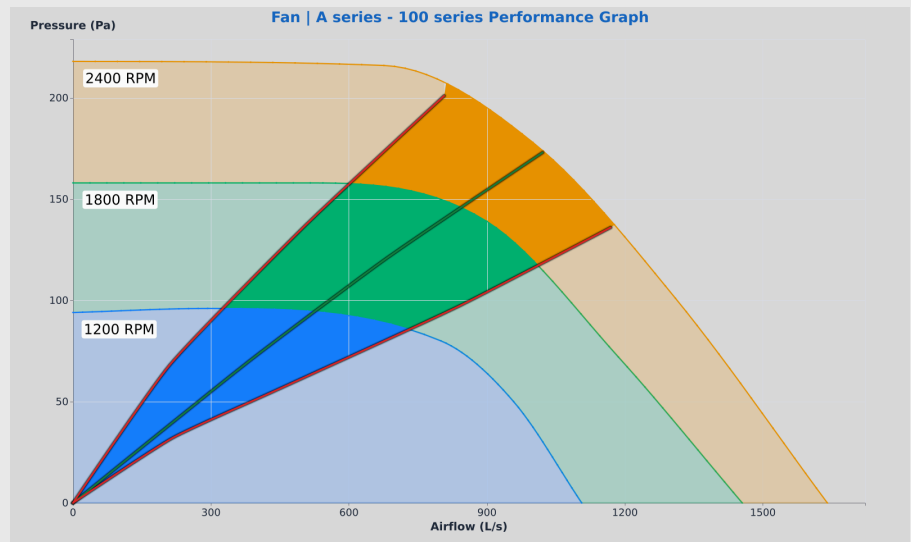

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1200			120									
1800			180									
2400			240									

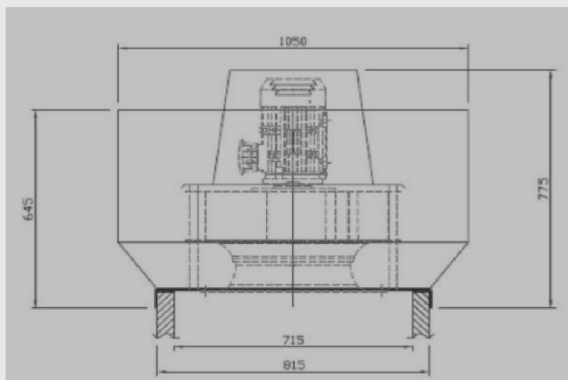

A series - AFD-2200X



Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER

Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR



Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor


FAN

Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C



Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
1500												
2100												

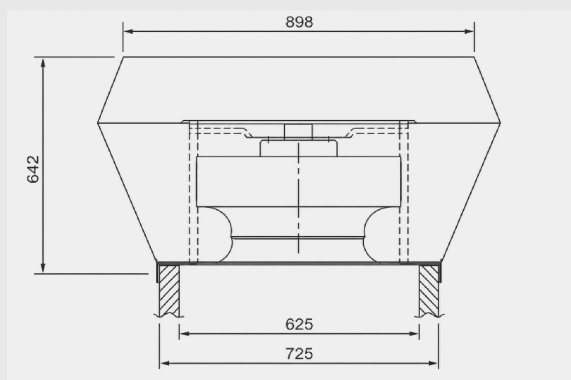



Desc1 test
Desc2 test
Desc3 test

IMPELLER


Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR


Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	230V/1ph/50Hz
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

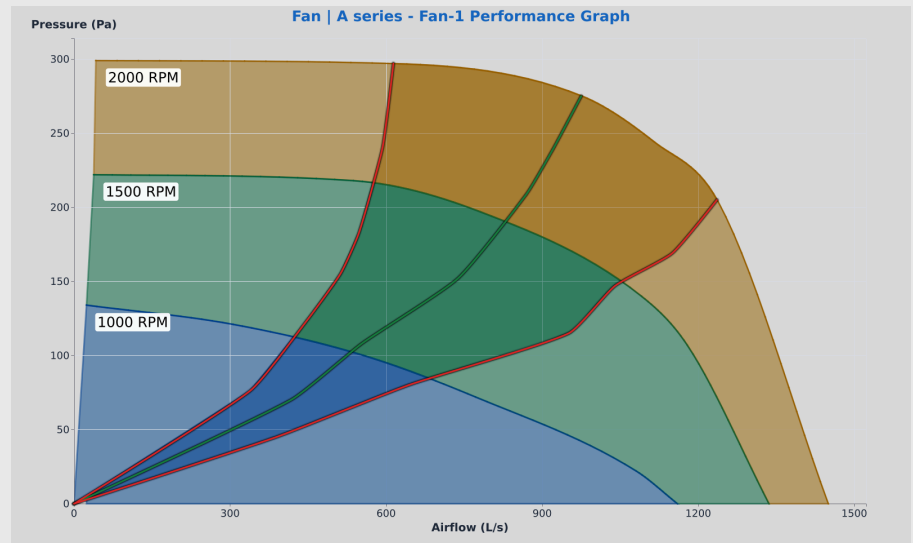

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Voltage (V)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000	69		50									
1500	79		100									
2000			150									

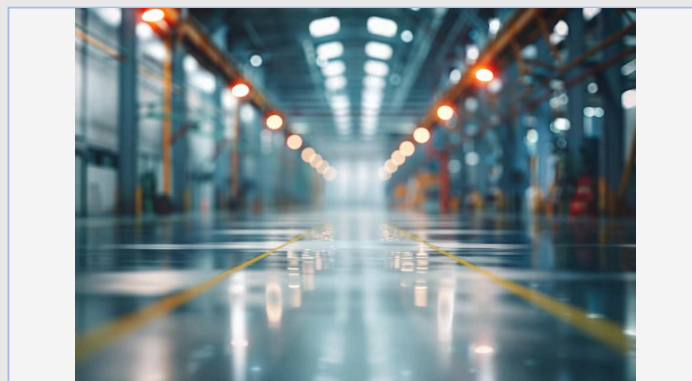

ABC

B series

A series

ABC



B series

A series

ABC

Fans - ABC

lol


Slightly limited size range, but optimised for its purpose

A different kettle of fish than the other series


Better suited to large current draw applications, and operation in dusty environments



Series image unavailable

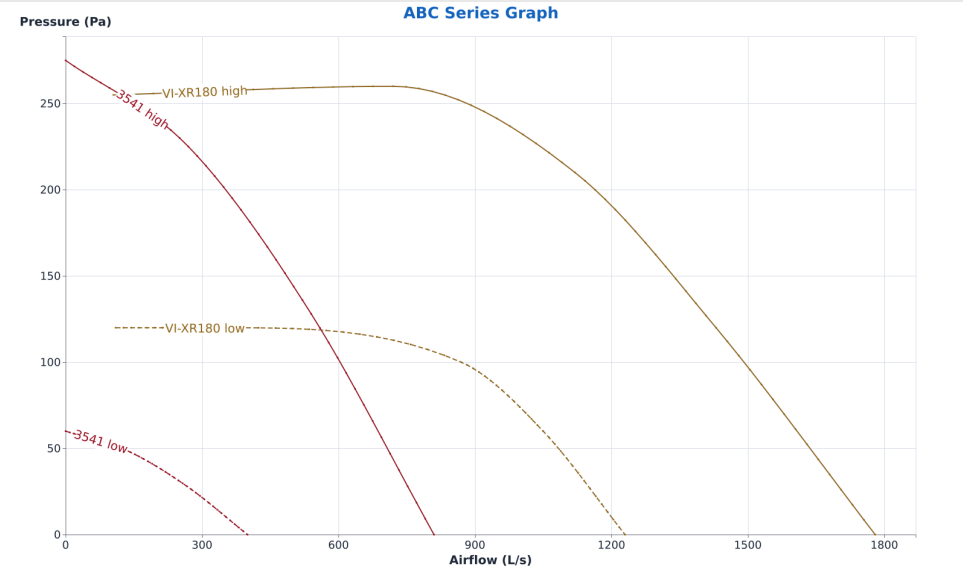

Model	Mounting style	Discharge type	Impeller size	Pressure Range	Airflow Range	SWL Range	Power Range
3541	—	—	—	0 - 275 Pa	0 - 810 L/s	—	—
VI-XR180	—	—	—	0 - 260 Pa	95 - 1780 L/s	—	—



MAIN


Mounting style

Discharge type

IMPELLER

Size


Material

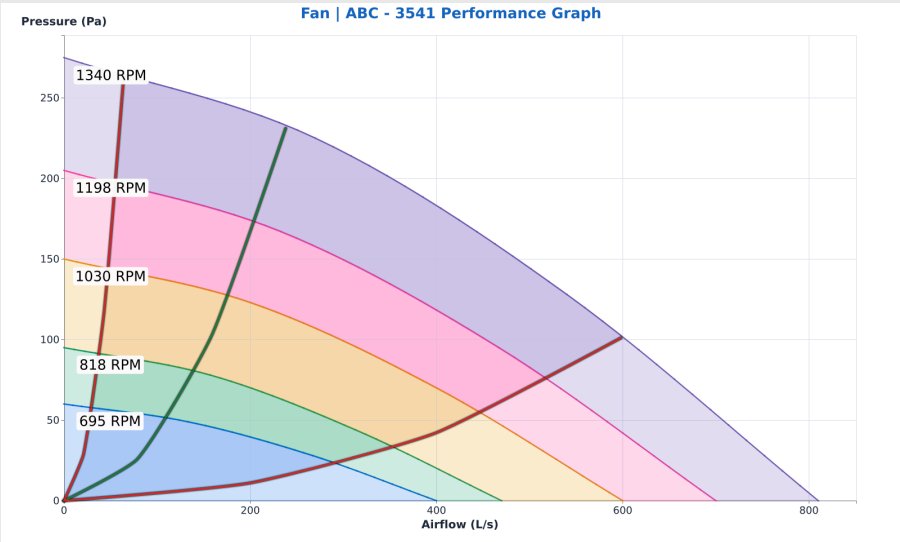

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
695												
818												
1030												
1198												
1340												


No product images available.

No product image available.




No grouped specifications available.

desc 1
desc 2
desc 3
desc 4

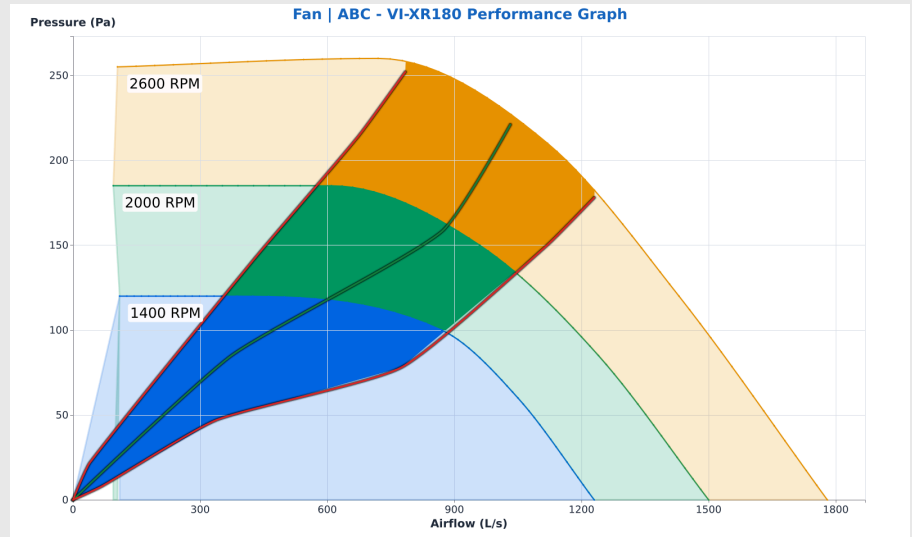

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency (Hz)	Sound Pressure Level (dB) @ 3 meters	Sound (Hz) Power Level (dB) SWL re 1pw							
					63	125	250	500	1k	2k	4k	8k
1400												
2000												
2600												

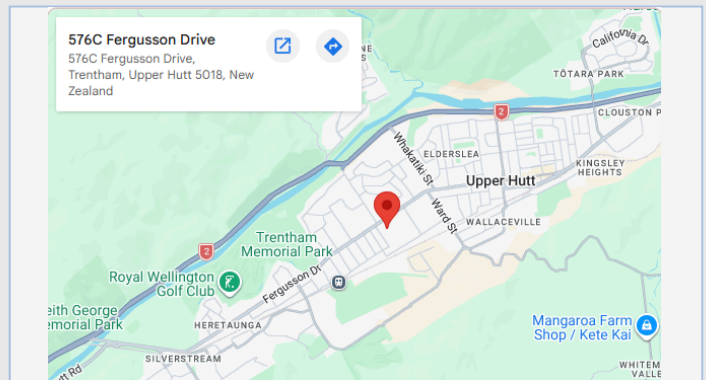

ABC

A series

B series

VENT-TECH Contact Details



General office: 04 595 1403



Website

www.venttech.co.nz



Orders and enquiries

admin@venttech.co.nz



Product finder

www.venttech.co.nz/products


OUR LOCATION

Upper Hutt

576c Fergusson Drive, Upper Hutt 5018, Wellington



Shop front

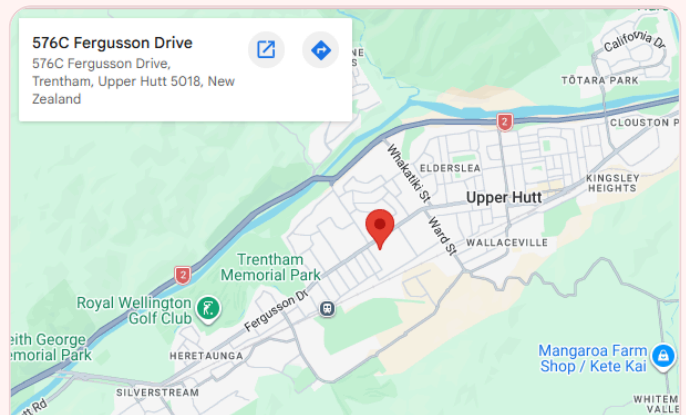

Map

Series groups

a1

Pages 5-8

No image

- lol
- haha

a1

Speed Controllers - a1

Series image unavailable

Series image unavailable

a1 series graph

Model	—	—	—	Pressure Range	Airflow Range	SWL Range	Power Range
No products are linked to this series yet.							

VENT-TECH Contact Details



General office: 04 595 1403



Website

www.venttech.co.nz



Orders and enquiries

admin@venttech.co.nz



Product finder

www.venttech.co.nz/products


OUR LOCATION

Upper Hutt

576c Fergusson Drive, Upper Hutt 5018, Wellington



Shop front

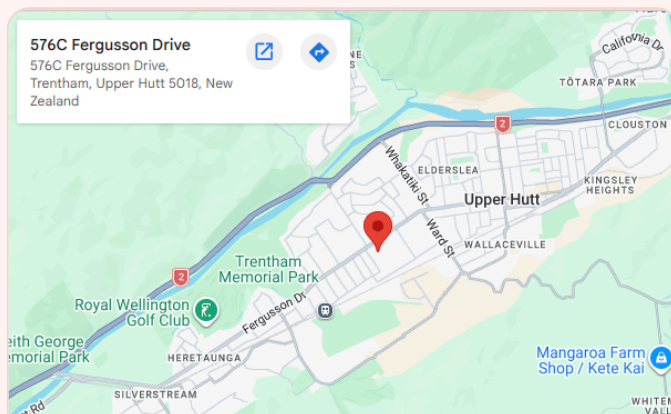

Map

Series groups

Silencer - A series

Pages 5-8



No description provided.

Silencer - A series

Attenuators - Silencer - A series

Series image unavailable




Series image unavailable

Silencer - A series series graph

Model	Silencer: Diameter	Silencer: Length	Silencer: Casing	Pressure Range	Airflow Range	SWL Range	Power Range
Splitter type	1500 mm	2400 mm	Lock formed pre-galvanised steel sheet	—	—	—	—

Silencer - A series - Splitter type

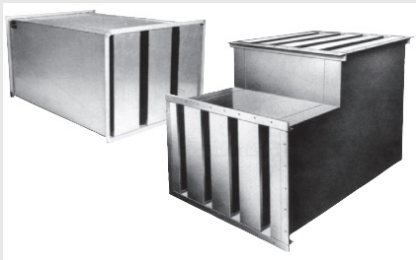

 Splitter type graph

SILENCER	
Diameter	1500 mm
Length	2400 mm
Casing	Lock formed pre-galvanised steel sheet
Media	—
Weight	20 kg

No product images available.

No product image available.