

Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER


- Size 560 mm
- Type Backward curve
- Material Steel
- Motor finish Powder coat

MOTOR

- Type IE2
- IP Rating 55
- Insulation Class 155
- Power 3 kW
- Power Supply 400V/3PH/50Hz
- Speed 1415 RPM
- FLC —
- Capacitor 6.4 A
- Control Variable Speed Drive
- Protection Thermistor

FAN

- Plate Galvanised steel
- Weight 139 kg
- Max. Temp 50 °C

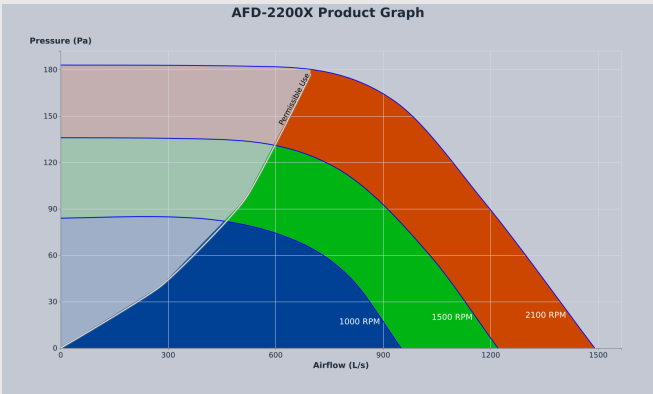

Fan Map Points

RPM Line	Point	Airflow	Pressure
1000	1	0	84
1000	2	240	85
1000	3	650	70
1000	4	810	45
1000	5	950	0
1500	1	0	136
1500	2	430	135
1500	3	780	115
1500	4	1030	60
1500	5	1220	0
2100	1	0	183
2100	2	583	182
2100	3	930	160
2100	4	1180	95
2100	5	1490	0

