

 Vent-Tech catalogue cover artwork
100% NZ Owned
& Operated
VENT-TECH
VENTILATION TECHNOLOGY & PRODUCTS
PRODUCT
CATALOGUE
2024 / 2025
✓ Quality
Products
◆ Innovative
Solutions
● Superior
Performance
✦ Reliable
Systems
■ Built for
NZ Conditions
▴ Supporting
New Zealand
www.venttech.co.nz 04 595 1403
PDF PAGE BREAK
 Company information background
VENT-TECH

Contact Details



Phone: 04 595 1403



Website www.venttech.co.nz



Orders and enquiries sales@venttech.co.nz



General office 04 595 1403

Locations

Lower Hutt

Head Office

Vent-Tech
Wellington
New Zealand

04 595 1403

New Zealand

Sales & Support

Nationwide product supply
Technical support
Ventilation solutions

sales@venttech.co.nz

Image / showroom placeholder
Image / warehouse placeholder
Image / product placeholder
Map placeholder
Map placeholder
PDF PAGE BREAK
Product Type

Fan



Series Legend

- Fan - A series
3 products
- Fan - B series
2 products


Fan

Fan - A series

3 products



100 series

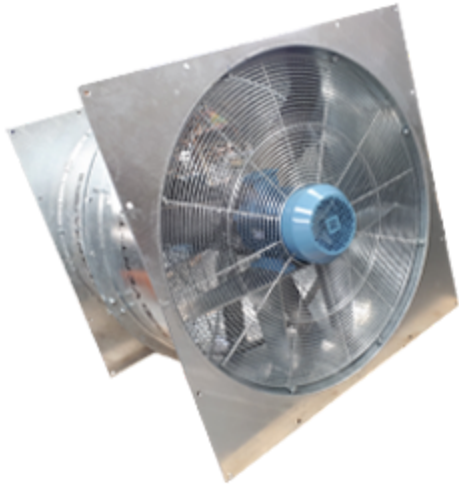

AFD-2200X



Fan-1

Fan - B series

2 products

No image

sp101

No image

sp102

SERIES OVERVIEW

Template Series Default
Products 3
Graph rule Highest and lowest line from each product

DESCRIPTION1


The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

DESCRIPTION4


Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

Description2
Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

Description3
Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

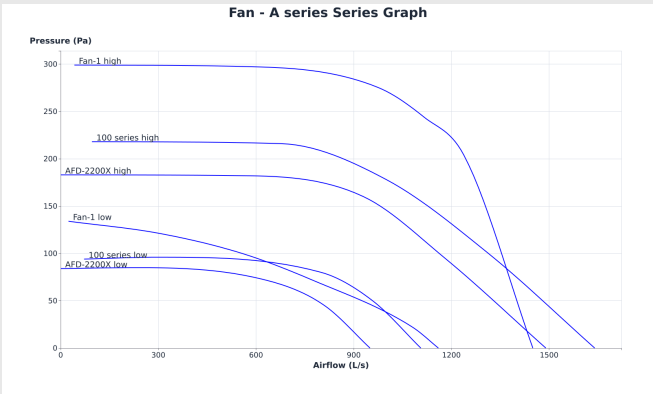

Model	Main: Mounting style	Main: Discharge type	Impeller: Size	Impeller: Type	Impeller: Material	Impeller: Motor finish
100 series	Wall mounted	Horizontal discharge	—	Backward curve	—	—
AFD-2200X	—	—	560 mm	Backward curve	Steel	Powder coat
Fan-1	—	—	—	Backward curve	—	—

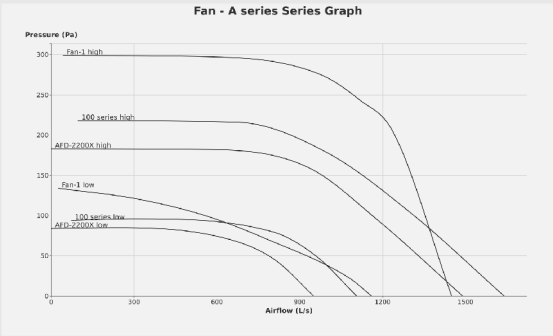

PRODUCT TYPE
Fan

PRODUCTS
3

GRAPH RULE
Highest and lowest line from each product

**IMPELLER**

Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR

Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	—
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—

Description**Description:**


Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications:


Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers Sizes: 400, 450, 500, 560, 630mm diameter Fan Performance: The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

Applications

Not provided.

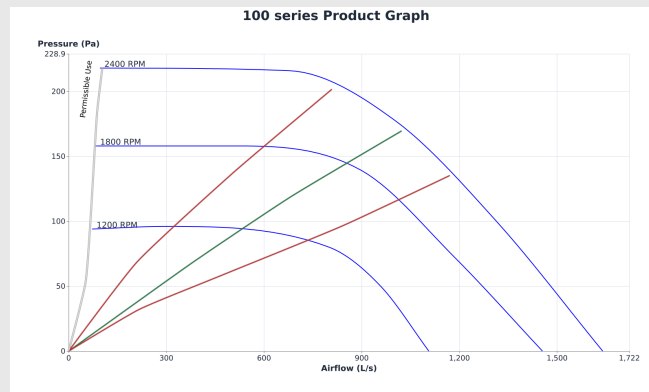**Fan Map Points**

RPM Line	Point	Airflow	Pressure
1200	1	72	94
1200	2	293	96
1200	3	800	80
1200	4	958	50
1200	5	1106	0
1800	1	83	158
1800	2	516	158
1800	3	900	139
1800	4	1186	72
1800	5	1455	0
2400	1	96	218
2400	2	676	216
2400	3	1000	178
2400	4	1310	101
2400	5	1640	0

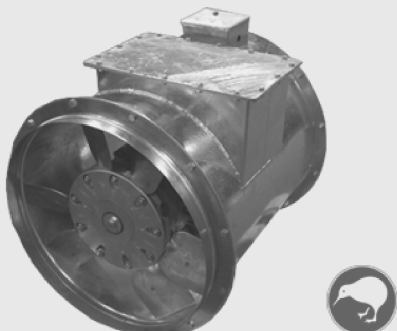



Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER


Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR

Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor


FAN


Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C

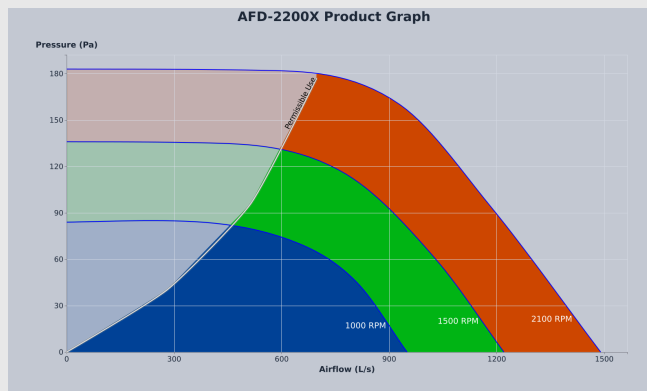

Fan Map Points

RPM Line	Point	Airflow	Pressure
1000	1	0	84
1000	2	240	85
1000	3	650	70
1000	4	810	45
1000	5	950	0
1500	1	0	136
1500	2	430	135
1500	3	780	115
1500	4	1030	60
1500	5	1220	0
2100	1	0	183
2100	2	583	182
2100	3	930	160
2100	4	1180	95
2100	5	1490	0






Description

Desc1 test

Applications

Desc2 test

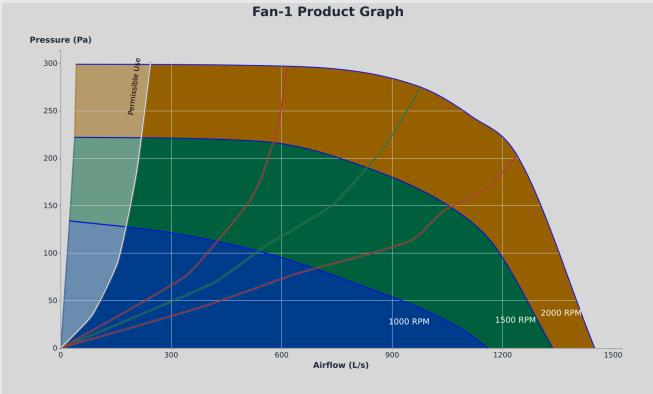

IMPELLER

- Size —
- Type Backward curve
- Material —
- Motor finish —

MOTOR


- Type —
- IP Rating —
- Insulation —
- Power —
- Power Supply —
- Speed —
- FLC —
- Capacitor —
- Control —
- Protection —

FAN

- Plate —
- Weight —
- Max. Temp —

Fan Map Points

RPM Line	Point	Airflow	Pressure
1000	1	24	134
1000	2	306	121
1000	3	557	100
1000	4	772	72
1000	5	1081	22
1000	6	1160	0
1500	1	38	222
1500	2	537	218
1500	3	781	197
1500	4	1091	140
1500	5	1179	107
1500	6	1336	0
2000	1	42	299
2000	2	614	297
2000	3	977	275
2000	4	1116	244
2000	5	1238	204
2000	6	1450	0

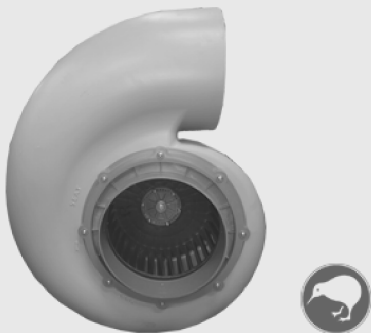

SERIES OVERVIEW

Template

Series Default

Products

2

Graph rule

Highest and lowest line from each product

Description2

desc2

Description3


desc3

DESCRIPTION1


desc1

DESCRIPTION4

desc4

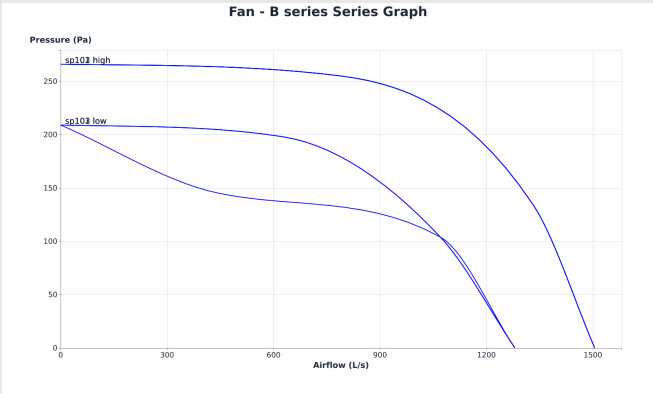

Model	Main: Mounting style	Main: Discharge type	Impeller: Size
sp101	—	—	—
sp102	—	—	—

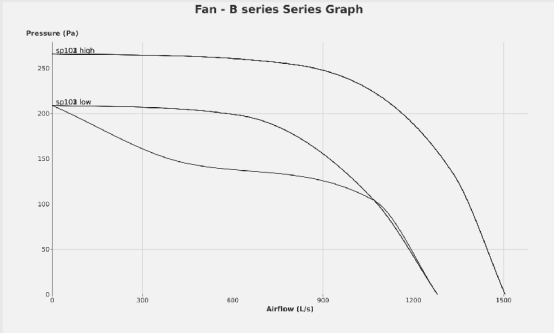

PRODUCT TYPE

Fan

PRODUCTS

2

GRAPH RULE

Highest and lowest line from each product



Description

Not provided.

Applications

Not provided.

IMPELLER


Size —

MOTOR

No motor grouped specifications available.

FAN

No fan grouped specifications available.



Fan Map Points

RPM Line	Point	Airflow	Pressure
1000	1	0	209
1000	2	626	198
1000	3	1070	104
1000	4	1280	0
2000	1	0	266
2000	2	789	255
2000	3	1332	134
2000	4	1505	0

No product images available.





Description
Not provided.

Applications
Not provided.

IMPELLER


Size —

MOTOR

No motor grouped specifications available.

FAN

No fan grouped specifications available.

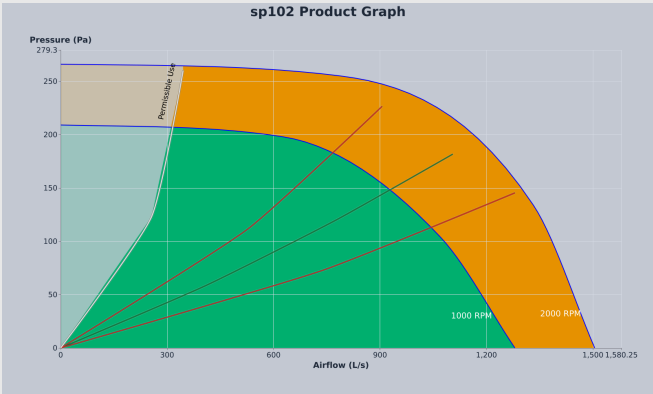

Fan Map Points

RPM Line	Point	Airflow	Pressure
1000	1	0	209
1000	2	626	198
1000	3	1070	104
1000	4	1280	0
2000	1	0	266
2000	2	789	255
2000	3	1332	134
2000	4	1505	0

No product images available.

