

# VENT-TECH

VENTILATION TECHNOLOGY & PRODUCTS

## PRODUCT CATALOGUE

2024 / 2025



QUALITY  
PRODUCTS



INNOVATIVE  
SOLUTIONS



SUPERIOR  
PERFORMANCE



RELIABLE  
SYSTEMS



BUILT FOR  
NZ CONDITIONS



SUPPORTING  
NEW ZEALAND



# Contact Details



**Phone:** 04 595 1403



**Website**

[www.venttech.co.nz](http://www.venttech.co.nz)



**Orders and enquiries**

[email protected]



**General office**

04 595 1403

## LOCATIONS

### Lower Hutt

#### Head Office

Vent-Tech  
Wellington  
New Zealand  
04 595 1403

### New Zealand

#### Sales & Support

Nationwide product supply  
Technical support  
Ventilation solutions  
[email protected]

Image / showroom placeholder

Image / warehouse placeholder

Image / product placeholder

Map placeholder

Map placeholder

## Series groups

### Fan - A series



The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

### Fan - B series

No image

desc1

# Fan Series

# Fan - A series

## SERIES OVERVIEW

**Template** Series Default  
**Products** 3  
**Graph rule** Highest and lowest line from each product

## DESCRIPTION1

The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

## DESCRIPTION4


Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

## Description2


Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

## Description3

Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

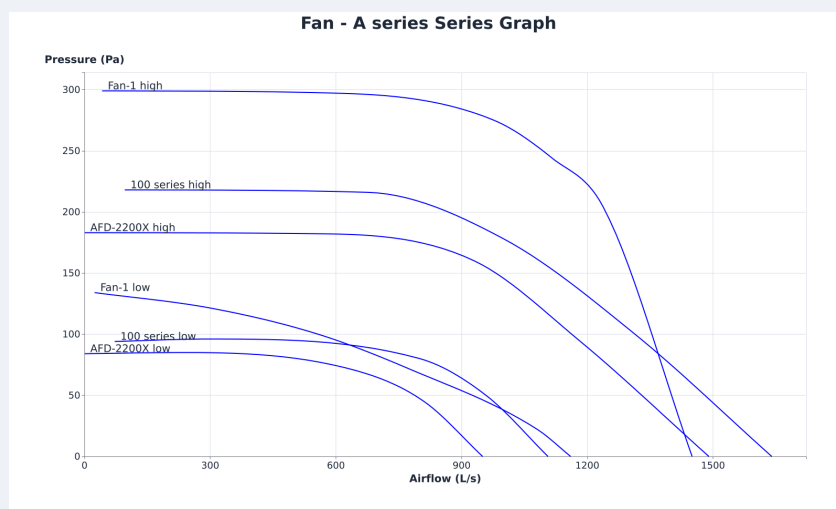

| Model      | Main: Mounting style | Main: Discharge type | Impeller: Size | Impeller: Type | Impeller: Material | Impeller: Motor finish |
|------------|----------------------|----------------------|----------------|----------------|--------------------|------------------------|
| 100 series | Wall mounted         | Horizontal discharge | —              | Backward curve | —                  | —                      |
| AFD-2200X  | —                    | —                    | 560 mm         | Backward curve | Steel              | Powder coat            |
| Fan-1      | —                    | —                    | —              | Backward curve | —                  | —                      |

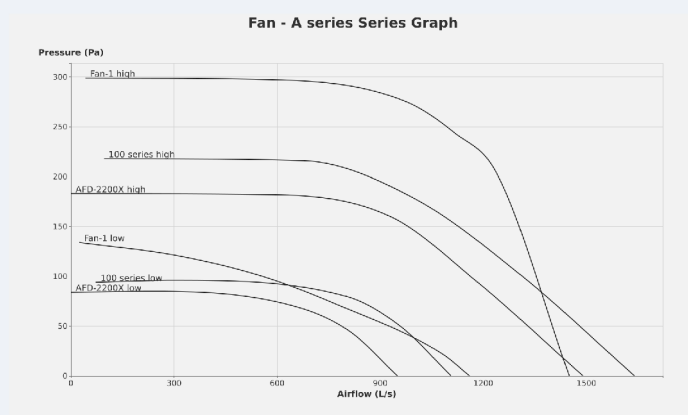

## PRODUCT TYPE

Fan

## PRODUCTS

3

## GRAPH RULE

Highest and lowest line from each product



## Description

### Description:

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

## IMPELLER

|              |                |
|--------------|----------------|
| Size         | —              |
| Type         | Backward curve |
| Material     | —              |
| Motor finish | —              |

## MOTOR

|              |   |
|--------------|---|
| Type         | — |
| IP Rating    | — |
| Insulation   | — |
| Power        | — |
| Power Supply | — |
| Speed        | — |
| FLC          | — |
| Capacitor    | — |
| Control      | — |
| Protection   | — |

## FAN

|           |   |
|-----------|---|
| Plate     | — |
| Weight    | — |
| Max. Temp | — |


## Applications:

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers Sizes: 400, 450, 500, 560, 630mm diameter Fan

Performance: The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

## Applications


*Not provided.*

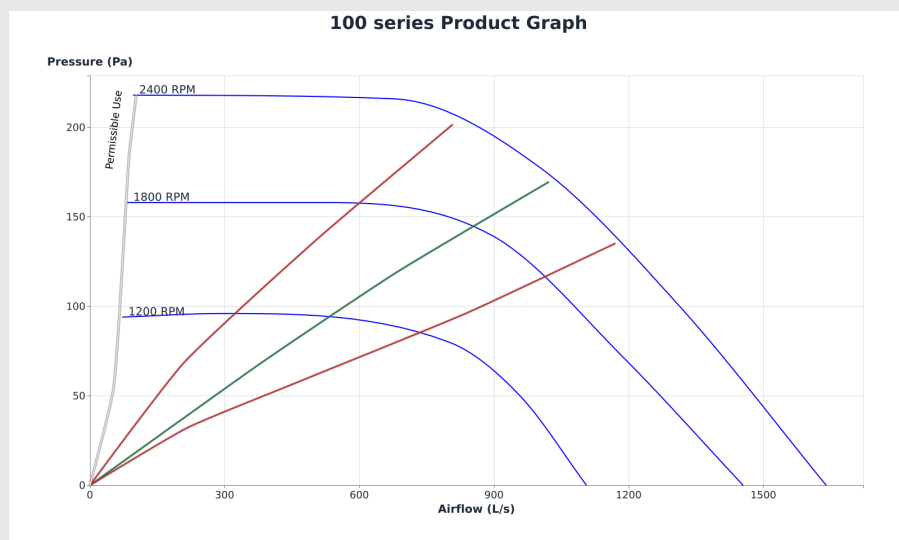

## Fan Map Points

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 1200     | 1     | 72      | 94       |
| 1200     | 2     | 293     | 96       |
| 1200     | 3     | 800     | 80       |
| 1200     | 4     | 958     | 50       |
| 1200     | 5     | 1106    | 0        |
| 1800     | 1     | 83      | 158      |
| 1800     | 2     | 516     | 158      |
| 1800     | 3     | 900     | 139      |
| 1800     | 4     | 1186    | 72       |
| 1800     | 5     | 1455    | 0        |
| 2400     | 1     | 96      | 218      |
| 2400     | 2     | 676     | 216      |
| 2400     | 3     | 1000    | 178      |

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 2400     | 4     | 1310    | 101      |
| 2400     | 5     | 1640    | 0        |

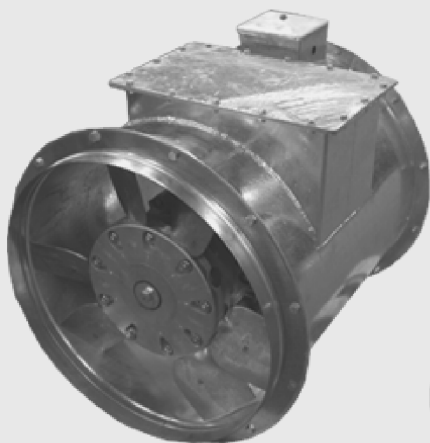


Fan

Fan - A series

100 series

Fan · Fan - A series

100 series



## Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

## Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

### IMPELLER


|                     |                |
|---------------------|----------------|
| <b>Size</b>         | 560 mm         |
| <b>Type</b>         | Backward curve |
| <b>Material</b>     | Steel          |
| <b>Motor finish</b> | Powder coat    |

### MOTOR

|                     |                      |
|---------------------|----------------------|
| <b>Type</b>         | IE2                  |
| <b>IP Rating</b>    | 55                   |
| <b>Insulation</b>   | Class 155            |
| <b>Power</b>        | 3 kW                 |
| <b>Power Supply</b> | 400V/3PH/50Hz        |
| <b>Speed</b>        | 1415 RPM             |
| <b>FLC</b>          | —                    |
| <b>Capacitor</b>    | 6.4 A                |
| <b>Control</b>      | Variable Speed Drive |
| <b>Protection</b>   | Thermistor           |

### FAN


|                  |                  |
|------------------|------------------|
| <b>Plate</b>     | Galvanised steel |
| <b>Weight</b>    | 139 kg           |
| <b>Max. Temp</b> | 50 °C            |

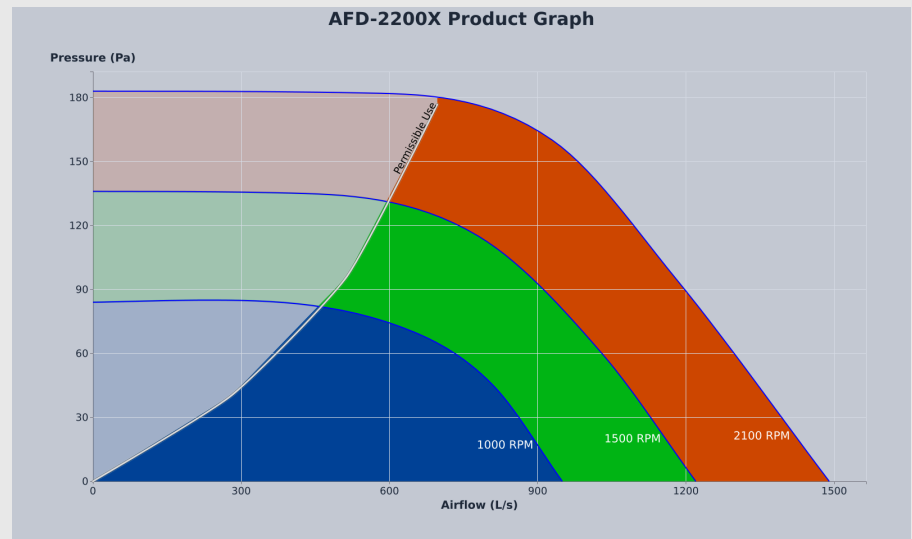

### Fan Map Points

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 1000     | 1     | 0       | 84       |
| 1000     | 2     | 240     | 85       |
| 1000     | 3     | 650     | 70       |
| 1000     | 4     | 810     | 45       |
| 1000     | 5     | 950     | 0        |
| 1500     | 1     | 0       | 136      |
| 1500     | 2     | 430     | 135      |
| 1500     | 3     | 780     | 115      |
| 1500     | 4     | 1030    | 60       |
| 1500     | 5     | 1220    | 0        |
| 2100     | 1     | 0       | 183      |
| 2100     | 2     | 583     | 182      |
| 2100     | 3     | 930     | 160      |

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 2100     | 4     | 1180    | 95       |
| 2100     | 5     | 1490    | 0        |

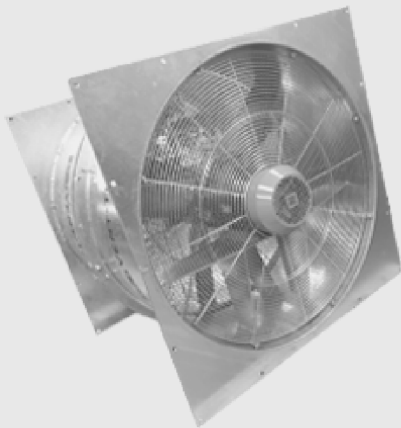

Fan

Fan - A series

AFD-2200X

Fan · Fan - A series

AFD-2200X



### Description

Desc1 test

### Applications

Desc2 test

#### IMPELLER


|              |                |
|--------------|----------------|
| Size         | —              |
| Type         | Backward curve |
| Material     | —              |
| Motor finish | —              |

#### MOTOR

|              |   |
|--------------|---|
| Type         | — |
| IP Rating    | — |
| Insulation   | — |
| Power        | — |
| Power Supply | — |
| Speed        | — |
| FLC          | — |
| Capacitor    | — |
| Control      | — |
| Protection   | — |

#### FAN


|           |   |
|-----------|---|
| Plate     | — |
| Weight    | — |
| Max. Temp | — |

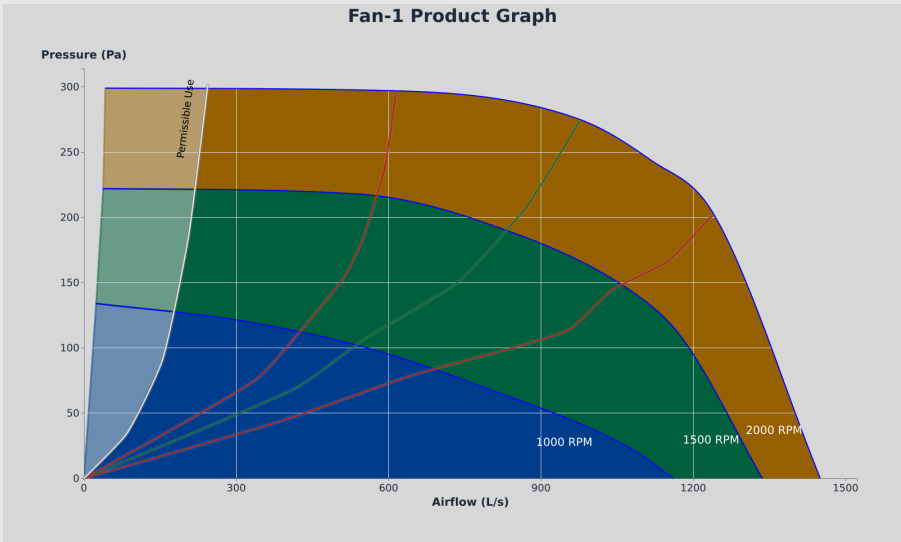

#### Fan Map Points

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 1000     | 1     | 24      | 134      |
| 1000     | 2     | 306     | 121      |
| 1000     | 3     | 557     | 100      |
| 1000     | 4     | 772     | 72       |
| 1000     | 5     | 1081    | 22       |
| 1000     | 6     | 1160    | 0        |
| 1500     | 1     | 38      | 222      |
| 1500     | 2     | 537     | 218      |
| 1500     | 3     | 781     | 197      |
| 1500     | 4     | 1091    | 140      |
| 1500     | 5     | 1179    | 107      |
| 1500     | 6     | 1336    | 0        |
| 2000     | 1     | 42      | 299      |

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 2000     | 2     | 614     | 297      |
| 2000     | 3     | 977     | 275      |
| 2000     | 4     | 1116    | 244      |
| 2000     | 5     | 1238    | 204      |
| 2000     | 6     | 1450    | 0        |

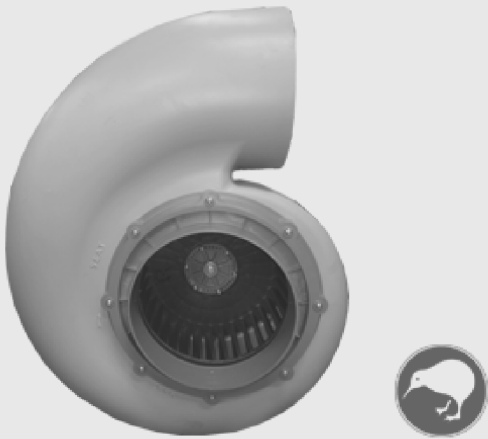

Fan

Fan - A series

Fan-1

Fan · Fan - A series

Fan-1

# Fan Series

# Fan - B series

## SERIES OVERVIEW

**Template** Series Default  
**Products** 2  
**Graph rule** Highest and lowest line from each product

## DESCRIPTION1

desc1

## DESCRIPTION4


desc4

## Description2


desc2

## Description3

desc3

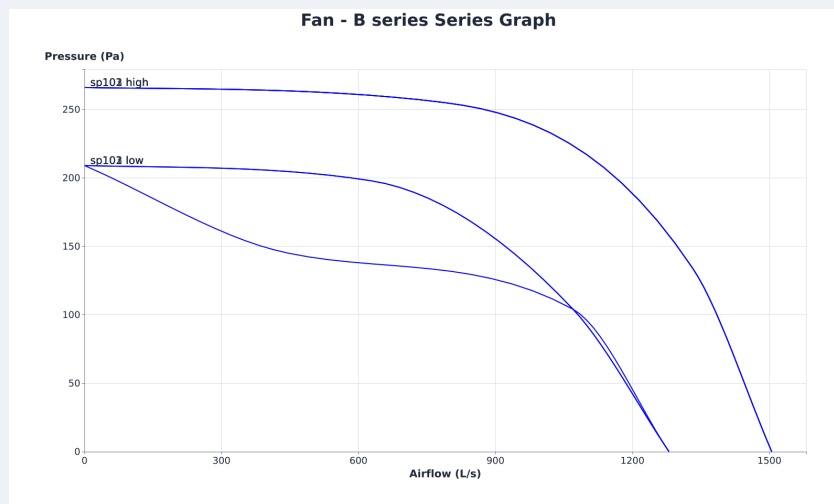

| Model | Main: Mounting style | Main: Discharge type | Impeller: Size |
|-------|----------------------|----------------------|----------------|
| sp101 | —                    | —                    | —              |
| sp102 | —                    | —                    | —              |

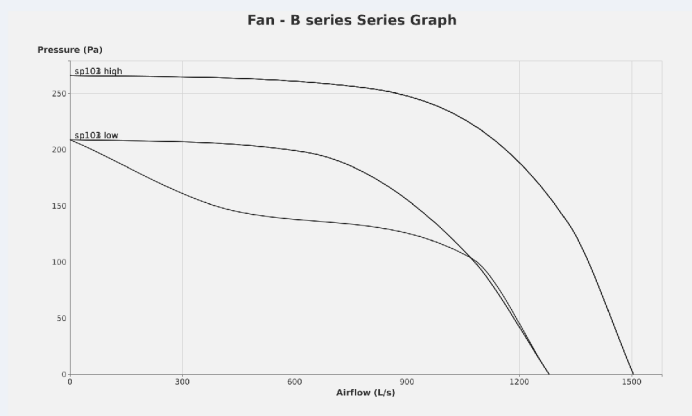

## PRODUCT TYPE

Fan

## PRODUCTS

2

## GRAPH RULE

Highest and lowest line from each product



Description

Not provided.

Applications

Not provided.

IMPELLER


Size —

MOTOR

No motor grouped specifications available.

FAN

No fan grouped specifications available.



Fan Map Points

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 1000     | 1     | 0       | 209      |
| 1000     | 2     | 626     | 198      |
| 1000     | 3     | 1070    | 104      |
| 1000     | 4     | 1280    | 0        |
| 2000     | 1     | 0       | 266      |
| 2000     | 2     | 789     | 255      |
| 2000     | 3     | 1332    | 134      |
| 2000     | 4     | 1505    | 0        |

No product images available.





Description

Not provided.

Applications

Not provided.

IMPELLER


Size —

MOTOR

No motor grouped specifications available.

FAN

No fan grouped specifications available.

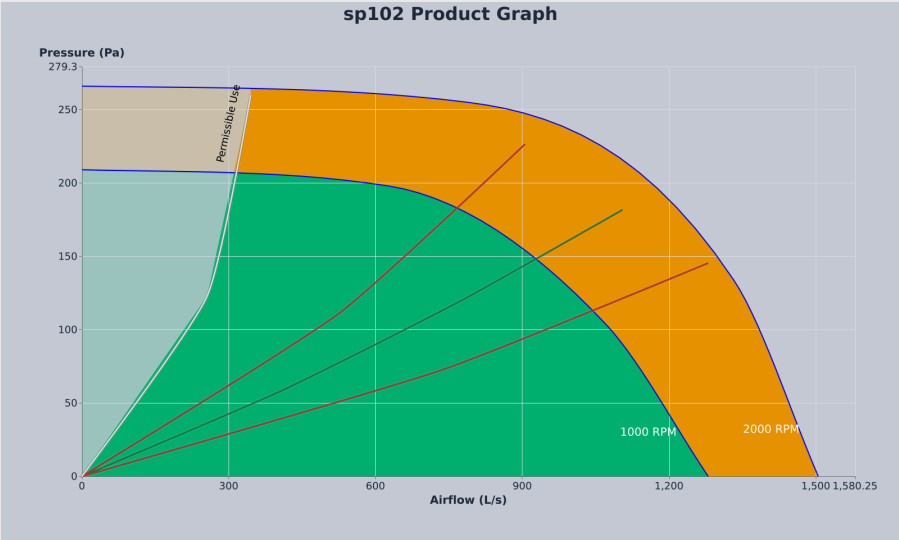

Fan Map Points

| RPM Line | Point | Airflow | Pressure |
|----------|-------|---------|----------|
| 1000     | 1     | 0       | 209      |
| 1000     | 2     | 626     | 198      |
| 1000     | 3     | 1070    | 104      |
| 1000     | 4     | 1280    | 0        |
| 2000     | 1     | 0       | 266      |
| 2000     | 2     | 789     | 255      |
| 2000     | 3     | 1332    | 134      |
| 2000     | 4     | 1505    | 0        |

No product images available.

