



Description

Description:

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

MAIN

Mounting style	Wall mounted
Discharge type	Horizontal discharge

IMPELLER

Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR

Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	—
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—


Applications:

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers Sizes: 400, 450, 500, 560, 630mm diameter Fan

Performance: The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

Applications

Not provided.

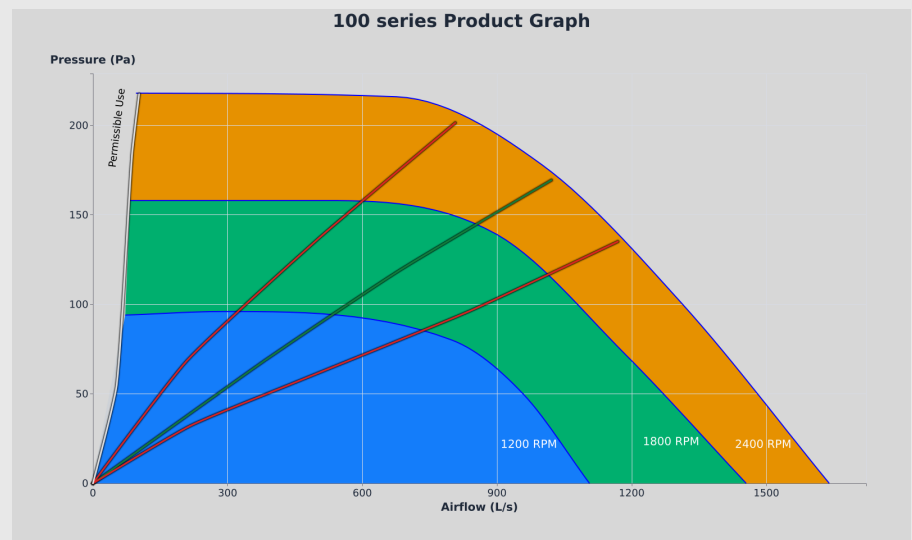

Fan Acoustic Table

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency	Sound Pressure Level dB @ 3 meters	Sound Power Level SWL dB re 1pw							
					63	125	250	500	1k	2k	4k	8k
2400	1046	3	55	58	69	82	81	75	72	68	66	64
1800	778	1.92	47	55	66	79	78	72	69	65	63	61
1200	574	1.22	41	51	62	75	74	68	65	61	59	57



Fan

Fan - A series

100 series

Fan · Fan - A series

100 series