

FAN

Fan - A series



Fan Series

Fan - A series

SERIES OVERVIEW

Template Series Default
Products 3
Graph rule Highest and lowest line from each product

DESCRIPTION1

The Fan is of large volume flow design. The impeller is designed to give excellent performance characteristic with large airflow and low static pressure development.

DESCRIPTION4


Steel plate with powder coating finish. Impeller/motor assembly to be supported by a powder coated / galvanised steel. Motor side guards to be fit as standards.

Description2


Flaktwoods aerofoil selection glass filled polypropylene impeller suited to more highly corrosive environments. The impellers are balanced according to ISO 1940

Description3

Manufactured to supply AS1359 high efficiency IE2 motor enclosure to feature IP55 protection. winding insulation are to incorporate thermal class 155 as standard.

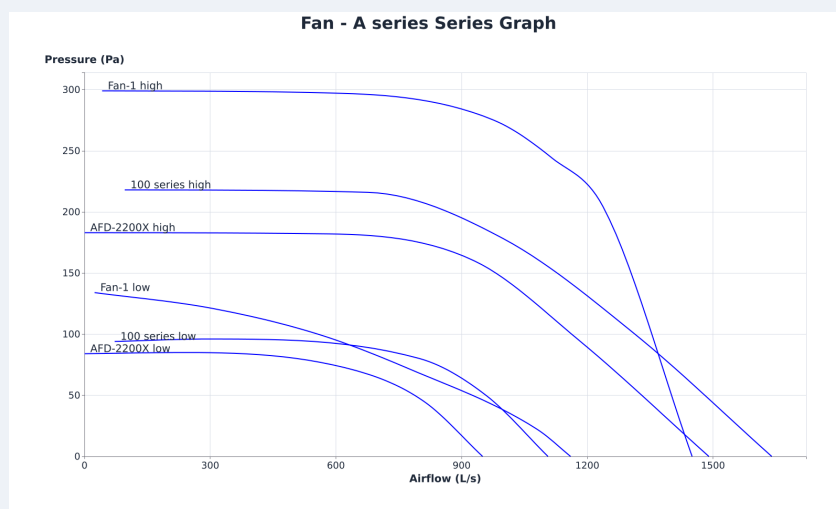

Model	Main: Mounting style	Main: Discharge type	Impeller: Size	Impeller: Type	Impeller: Material	Impeller: Motor finish
100 series	Wall mounted	Horizontal discharge	—	Backward curve	—	—
AFD-2200X	—	—	560 mm	Backward curve	Steel	Powder coat
Fan-1	—	—	—	Backward curve	—	—

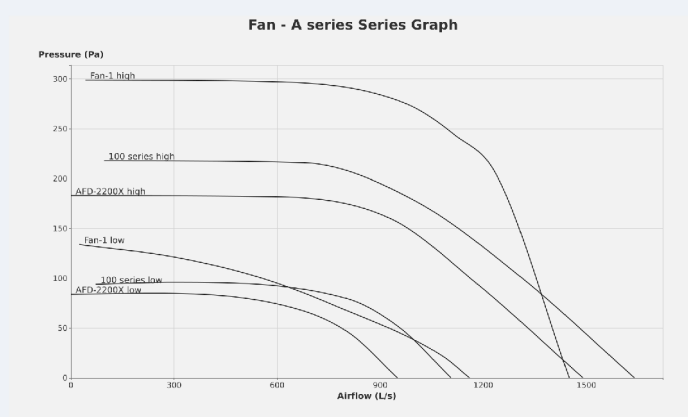

PRODUCT TYPE

Fan

PRODUCTS

3

GRAPH RULE

Highest and lowest line from each product



Description

Description:

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

MAIN

Mounting style	Wall mounted
Discharge type	Horizontal discharge

IMPELLER

Size	—
Type	Backward curve
Material	—
Motor finish	—

MOTOR

Type	—
IP Rating	—
Insulation	—
Power	—
Power Supply	—
Speed	—
FLC	—
Capacitor	—
Control	—
Protection	—

FAN

Plate	—
Weight	—
Max. Temp	—


Applications:

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers Sizes: 400, 450, 500, 560, 630mm diameter Fan

Performance: The fan is of low noise and high static efficiency design. The impeller is designed to give excellent performance characteristic with high static pressure development without stall.

Applications

Not provided.

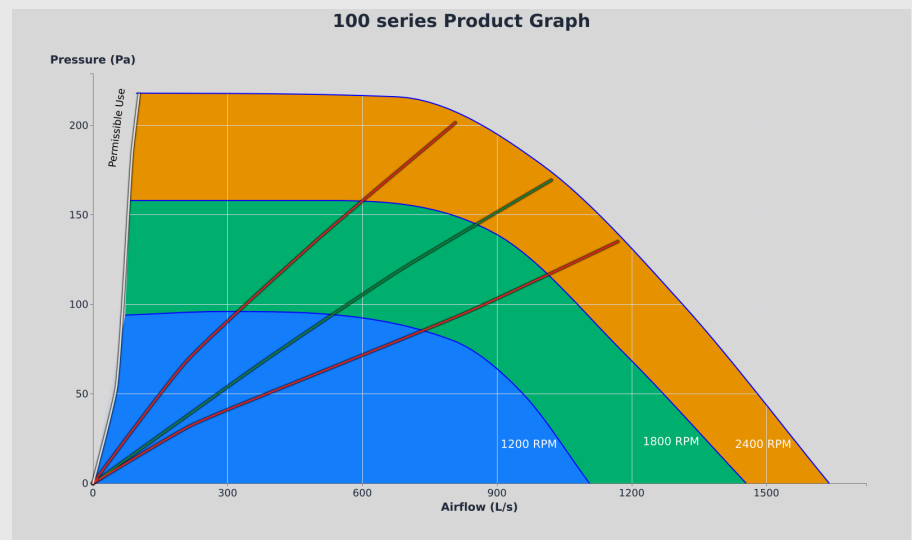

Fan Acoustic Table

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency	Sound Pressure Level dB @ 3 meters	Sound Power Level SWL dB re 1pw							
					63	125	250	500	1k	2k	4k	8k
2400	1046	3	55	58	69	82	81	75	72	68	66	64
1800	778	1.92	47	55	66	79	78	72	69	65	63	61
1200	574	1.22	41	51	62	75	74	68	65	61	59	57



Fan

Fan - A series

100 series

Fan · Fan - A series

100 series



Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER


Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR

Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor

FAN

Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C

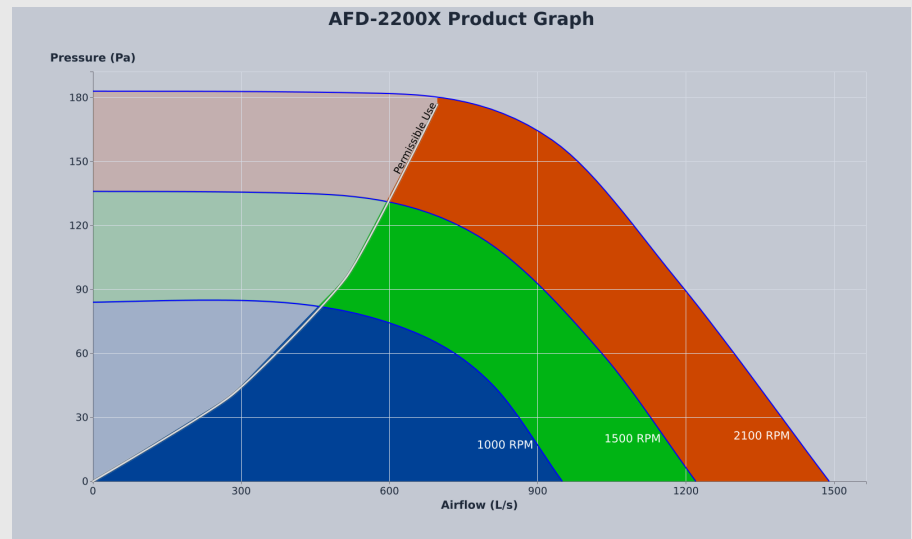

Fan Acoustic Table

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency	Sound Pressure Level dB @ 3 meters	Sound Power Level SWL dB re 1pw							
					63	125	250	500	1k	2k	4k	8k
2100												
1500												
1000												



Fan

Fan - A series

AFD-2200X

Fan · Fan - A series



**AFD-
2200X**



Description

Desc1 test

Applications

Desc2 test

IMPELLER


- Size —
- Type Backward curve
- Material —
- Motor finish —

MOTOR

- Type —
- IP Rating —
- Insulation —
- Power —
- Power Supply —
- Speed —
- FLC —
- Capacitor —
- Control —
- Protection —

FAN

- Plate —
- Weight —
- Max. Temp —

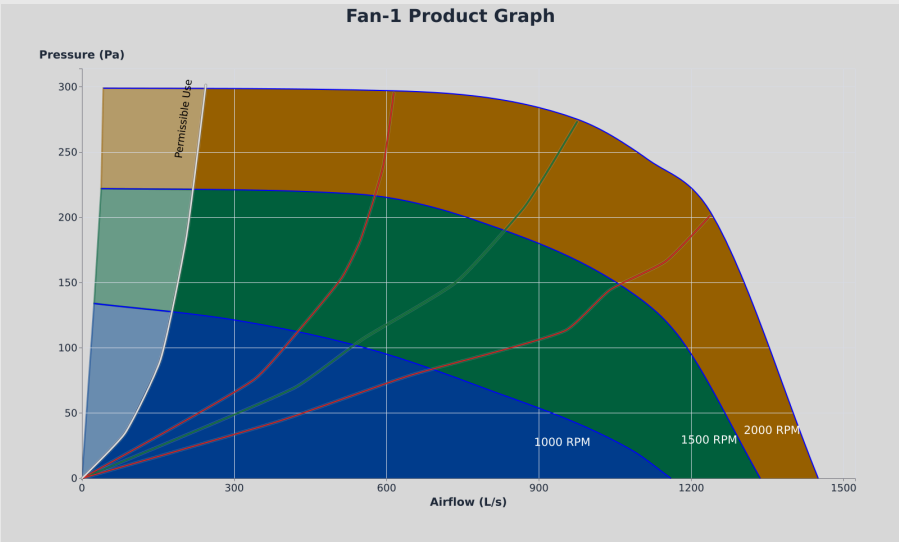

Fan Acoustic Table

Speed (rpm)	Peak Pressure (Pa)	Peak Power (kW)	Running Frequency	Sound Pressure Level dB @ 3 meters	Sound Power Level SWL dB re 1pw							
					63	125	250	500	1k	2k	4k	8k
1000												
1500												
2000												




Fan

Fan - A series

Fan-1

Fan · Fan - A series

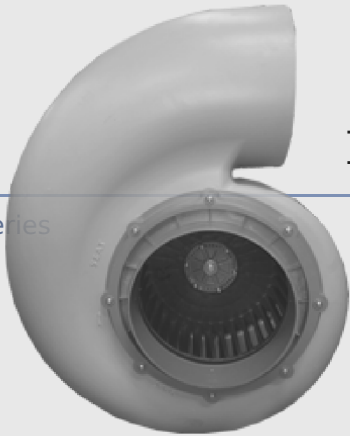

Fan-1