# Fan - A series AFD-2200X



## Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

## Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

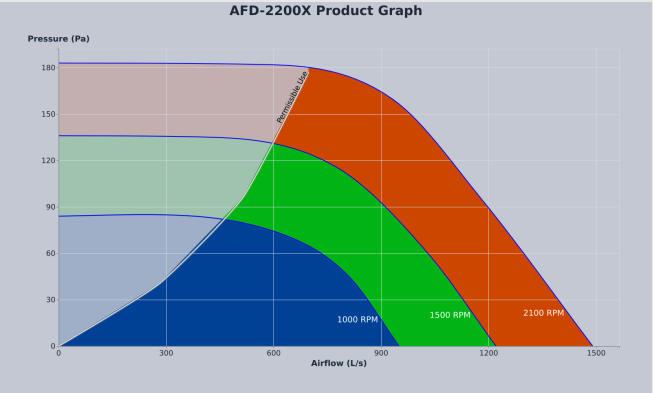


### IMPELLER

| | |
|---|---|
| **Size** | 560 mm |
| **Type** | Backward curve |
| **Material** | Steel |
| **Motor finish** | Powder coat |

### MOTOR

| | |
|---|---|
| **Type** | IE2 |
| **IP Rating** | 55 |
| **Insulation** | Class 155 |
| **Power** | 3 kW |
| **Power Supply** | 400V/3PH/50Hz |
| **Speed** | 1415 RPM |
| **FLC** | — |
| **Capacitor** | 6.4 A |
| **Control** | Variable Speed Drive |
| **Protection** | Thermistor |

### FAN

| | |
|---|---|
| **Plate** | Galvanised steel |
| **Weight** | 139 kg |
| **Max. Temp** | 50 °C |

**Fan Map Points**

| RPM Line | Point | Airflow | Pressure |
|---|---|---|---|
| 1000 | 1 | 0 | 84 |
| 1000 | 2 | 240 | 85 |
| 1000 | 3 | 650 | 70 |
| 1000 | 4 | 810 | 45 |
| 1000 | 5 | 950 | 0 |
| 1500 | 1 | 0 | 136 |
| 1500 | 2 | 430 | 135 |
| 1500 | 3 | 780 | 115 |
| 1500 | 4 | 1030 | 60 |
| 1500 | 5 | 1220 | 0 |
| 2100 | 1 | 0 | 183 |
| 2100 | 2 | 583 | 182 |
| 2100 | 3 | 930 | 160 |
| 2100 | 4 | 1180 | 95 |
| 2100 | 5 | 1490 | 0 |



# AFD-2200X