

Description

Rosenberg AC-Axial fans in combination with voltage-controllable external-rotor motor form a very compact, efficient and optimized fan unit. They impress with low installation depth and low noise level. Fast start-up is ensured because of well-integrated components.

Applications

Air heaters / Heat pumps / Condensers / Cooling units / Evaporators / Chillers

IMPELLER


Size	560 mm
Type	Backward curve
Material	Steel
Motor finish	Powder coat

MOTOR

Type	IE2
IP Rating	55
Insulation	Class 155
Power	3 kW
Power Supply	400V/3PH/50Hz
Speed	1415 RPM
FLC	—
Capacitor	6.4 A
Control	Variable Speed Drive
Protection	Thermistor

FAN


Plate	Galvanised steel
Weight	139 kg
Max. Temp	50 °C

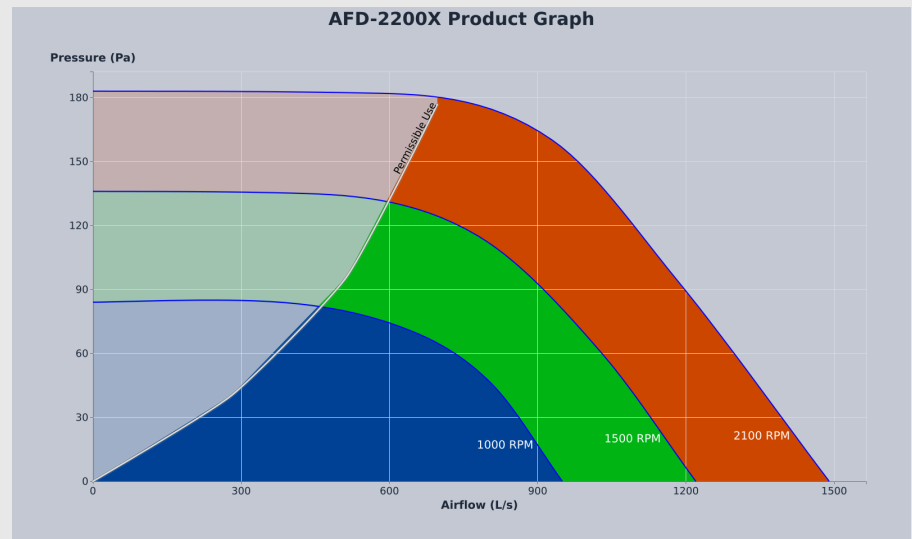

Fan Map Points

RPM Line	Point	Airflow	Pressure
1000	1	0	84
1000	2	240	85
1000	3	650	70
1000	4	810	45
1000	5	950	0
1500	1	0	136
1500	2	430	135
1500	3	780	115
1500	4	1030	60
1500	5	1220	0
2100	1	0	183
2100	2	583	182
2100	3	930	160

RPM Line	Point	Airflow	Pressure
2100	4	1180	95
2100	5	1490	0

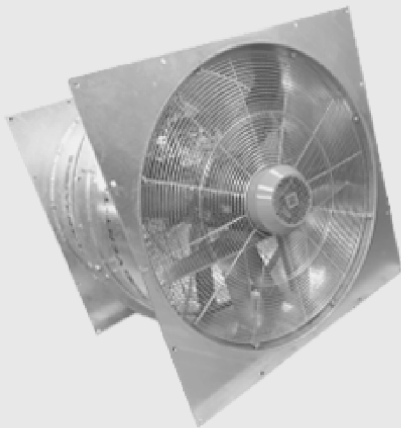

Fan

Fan - A series

AFD-2200X

Fan · Fan - A series

AFD-
2200X