
# RS PRO Aluminium/Aluminium Dome Head Blind Rivet, 4 mm Diameter x 10 mm long

Supplier Part Number: OJAD4010

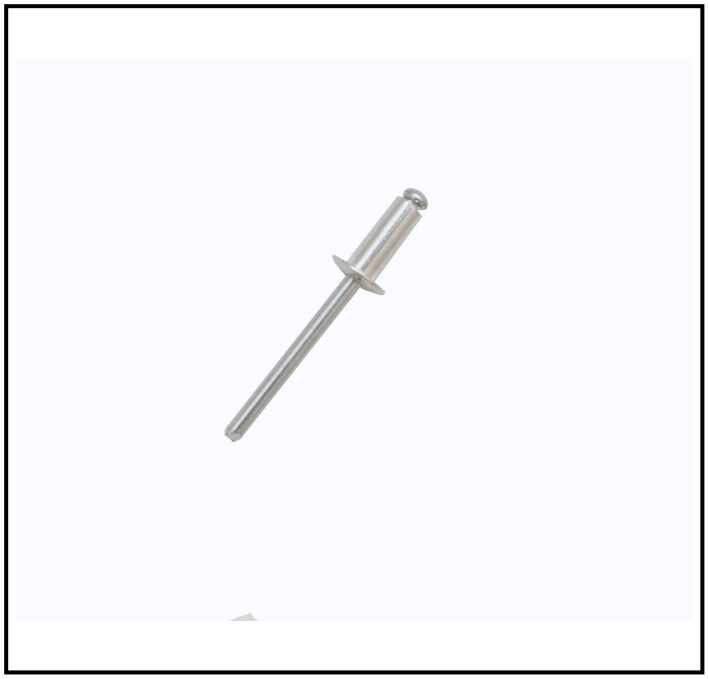

## FEATURES

- **Rivet Diameter:** 4 mm for precise fitting
- **Rivet Length:** 10 mm for accommodating various material thicknesses
- **Mandrel Material:** Aluminium for lightweight strength
- **Head Type:** Dome for a smooth finish
- **Maximum Grip:** 6 mm for versatile application
- **Minimum Grip:** 4 mm for secure fastening
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

The RS PRO 4 mm Aluminium Blind Rivet is designed for secure fastening in applications where only one side of the workpiece is accessible. Ideal for use in construction and manufacturing, this rivet provides a reliable and durable connection.

## General Specifications

| | |
|---|---|
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 4.1 mm |
| Mandrel Material | Aluminium |
| Maximum Grip | 6 mm |
| Minimum Grip | 4 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 8 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4 mm |
| Rivet Length | 10 mm |
| Shear Strength | 845 N |
| Tensile Strength | 1025 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

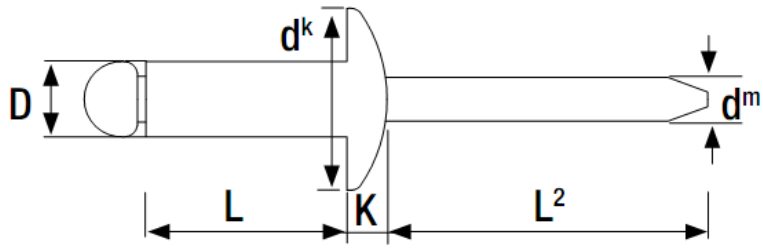

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| 3.2 | 6.0 | 1.5 | 3.0 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 1000 |
| | 8.0 | 3.0 | 5.0 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 1000 |
| | 10.0 | 5.0 | 7.0 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 1000 |
| | 12.0 | 7.0 | 8.5 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 1000 |
| | 14.0 | 8.5 | 10.5 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 1000 |
| | 16.0 | 10.5 | 12.5 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 800 |
| 4.0 | 6.0 | 1.0 | 2.0 | 3.3 | 6.5 | 0.8 | 1.95 | 26.0 | 535 | 670 | 1000 |
| | 8.0 | 2.0 | 4.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 800 |
| | 10.0 | 4.0 | 6.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 800 |
| | 12.0 | 6.0 | 8.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 800 |
| | 14.0 | 8.0 | 10.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 500 |
| | 16.0 | 10.0 | 12.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 500 |
| | 18.0 | 12.0 | 14.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 500 |
| | 20.0 | 14.0 | 16.0 | 4.1 | 8.0 | 1.0 | 2.45 | 27.0 | 845 | 1025 | 250 |
| 4.8 | 8.0 | 2.0 | 3.5 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 500 |
| | 10.0 | 3.5 | 5.5 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 500 |
| | 12.0 | 5.5 | 7.5 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 500 |
| | 14.0 | 7.5 | 9.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 500 |
| | 16.0 | 9.0 | 11.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 400 |
| | 18.0 | 11.0 | 13.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 400 |
| | 20.0 | 13.0 | 15.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 350 |
| | 25.0 | 15.0 | 20.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 250 |
| | 30.0 | 20.0 | 25.0 | 4.9 | 9.5 | 1.1 | 2.90 | 28.0 | 1150 | 1420 | 200 |