
RS PRO Aluminium/Aluminium Dome Head Blind Rivet, 4 mm Diameter x 12 mm long

Supplier Part Number: OJAD4012

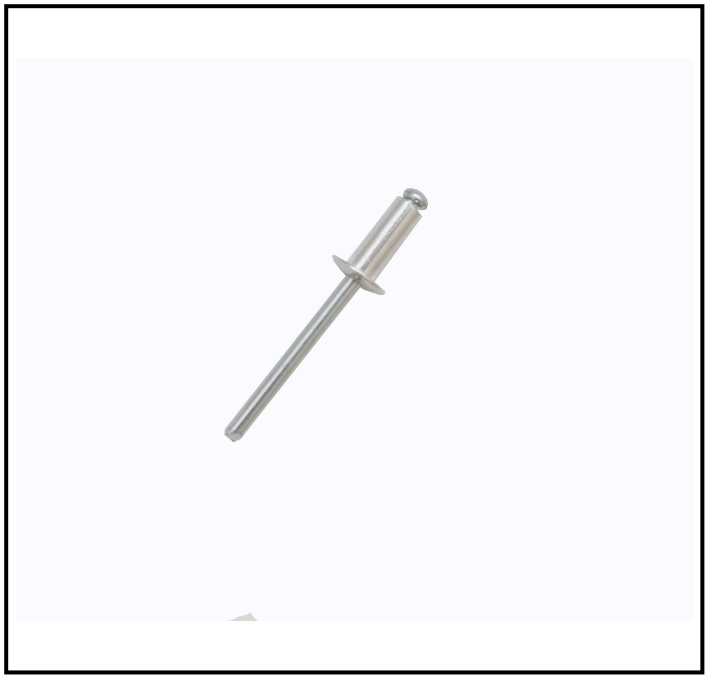

FEATURES

- **Dome Head:** Provides a neat and finished appearance.
- **Aluminium Mandrel:** Offers corrosion resistance and durability.
- **4 mm Rivet Diameter:** Suitable for a range of applications requiring medium-sized fasteners.
- **12 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **Maximum Grip Range of 8 mm:** Ensures versatility in fastening different material thicknesses.
- **Minimum Grip Range of 6 mm:** Provides flexibility for thinner materials.
- **Complies with DIN 7337:** Meets industry standards for quality and performance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivets are designed for secure fastening in applications where access is limited to one side. These rivets are ideal for use in a variety of industries, providing a reliable and durable connection. The aluminium construction ensures lightweight yet strong performance, making them suitable for both indoor and outdoor applications.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Aluminium
Maximum Grip	8 mm
Minimum Grip	6 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	12 mm
Shear Strength	845 N
Tensile Strength	1025 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

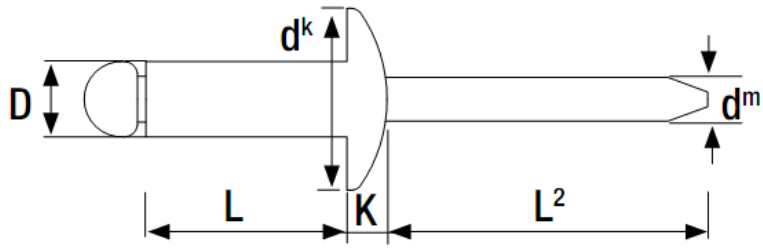



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.5	3.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	12.0	7.0	8.5	3.3	6.5	0.8	1.95	26.0	535	670	1000
	14.0	8.5	10.5	3.3	6.5	0.8	1.95	26.0	535	670	1000
	16.0	10.5	12.5	3.3	6.5	0.8	1.95	26.0	535	670	800
4.0	6.0	1.0	2.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	10.0	4.0	6.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	12.0	6.0	8.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	14.0	8.0	10.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	16.0	10.0	12.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	20.0	14.0	16.0	4.1	8.0	1.0	2.45	27.0	845	1025	250
4.8	8.0	2.0	3.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	10.0	3.5	5.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	12.0	5.5	7.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	14.0	7.5	9.0	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	16.0	9.0	11.0	4.9	9.5	1.1	2.90	28.0	1150	1420	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	1150	1420	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	1150	1420	350
	25.0	15.0	20.0	4.9	9.5	1.1	2.90	28.0	1150	1420	250
	30.0	20.0	25.0	4.9	9.5	1.1	2.90	28.0	1150	1420	200