
RS PRO Aluminium/Aluminium Dome Head Blind Rivet, 4 mm Diameter x 16 mm long

Supplier Part Number: OJAD4016

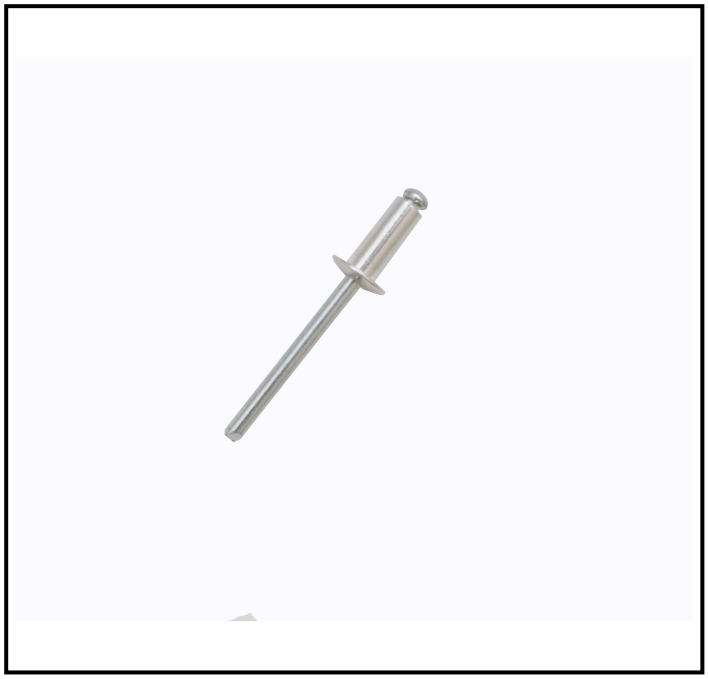

FEATURES

- **Rivet Diameter:** 4 mm for precise fitting in pre-drilled holes
- **Rivet Length:** 16 mm to accommodate a range of material thicknesses
- **Head Type:** Dome head for a neat and flush finish
- **Mandrel Material:** Aluminium for lightweight and corrosion-resistant properties
- **Maximum Grip:** 12 mm for versatility in different assembly requirements
- **Minimum Grip:** 10 mm ensuring secure fastening
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality aluminium blind rivet designed for secure and reliable fastening in various industrial applications. This rivet is ideal for situations where access is only available from one side of the workpiece, providing a strong and durable hold.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Aluminium
Maximum Grip	12 mm
Minimum Grip	10 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	16 mm
Shear Strength	845 N
Tensile Strength	1025 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

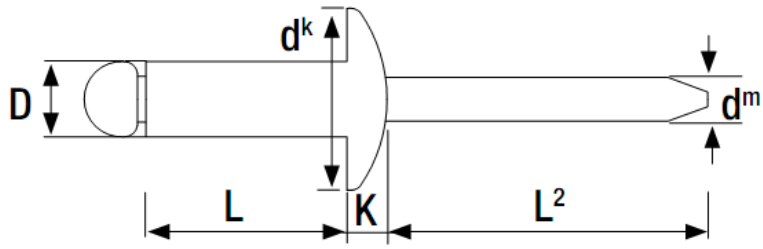



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.5	3.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	12.0	7.0	8.5	3.3	6.5	0.8	1.95	26.0	535	670	1000
	14.0	8.5	10.5	3.3	6.5	0.8	1.95	26.0	535	670	1000
	16.0	10.5	12.5	3.3	6.5	0.8	1.95	26.0	535	670	800
4.0	6.0	1.0	2.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	10.0	4.0	6.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	12.0	6.0	8.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	14.0	8.0	10.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	16.0	10.0	12.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	20.0	14.0	16.0	4.1	8.0	1.0	2.45	27.0	845	1025	250
4.8	8.0	2.0	3.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	10.0	3.5	5.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	12.0	5.5	7.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	14.0	7.5	9.0	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	16.0	9.0	11.0	4.9	9.5	1.1	2.90	28.0	1150	1420	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	1150	1420	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	1150	1420	350
	25.0	15.0	20.0	4.9	9.5	1.1	2.90	28.0	1150	1420	250
	30.0	20.0	25.0	4.9	9.5	1.1	2.90	28.0	1150	1420	200