
RS PRO Aluminium/Aluminium Dome Head Blind Rivet, 4.8 mm Diameter x 10 mm long

Supplier Part Number: OJAD4810

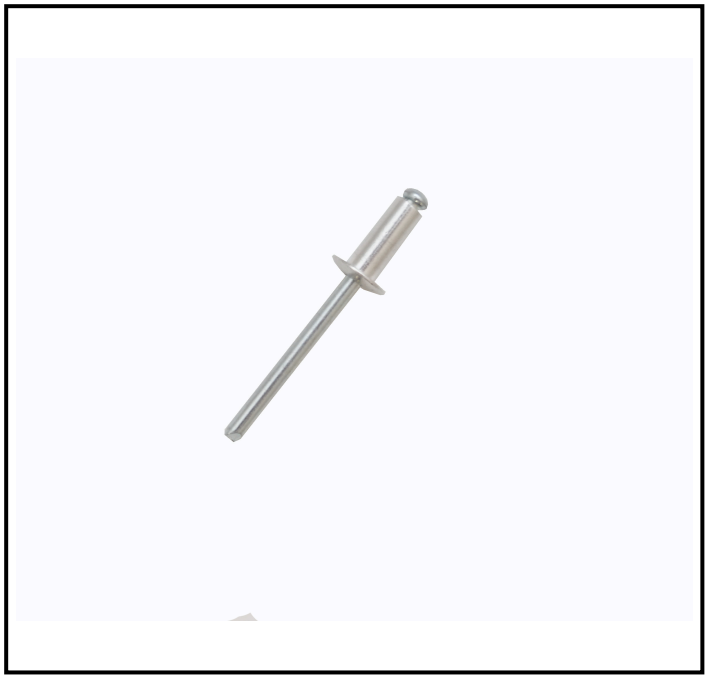

FEATURES

- **Dome Head:** Provides a neat and finished appearance.
- **Aluminium Mandrel:** Offers corrosion resistance and lightweight properties.
- **4.8 mm Diameter:** Suitable for a wide range of applications.
- **10 mm Rivet Length:** Accommodates materials with varying thicknesses.
- **Maximum Grip Range of 5.5 mm:** Ensures versatility in fastening different material thicknesses.
- **Minimum Grip Range of 3.5 mm:** Allows for secure fastening in thinner materials.
- **Compliance with DIN 7337:** Meets industry standards for quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is limited to one side. Ideal for joining materials with varying thicknesses, this rivet provides a reliable and durable connection. Its aluminium construction ensures lightweight yet robust performance.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Aluminium
Maximum Grip	5.5 mm
Minimum Grip	3.5 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	10 mm
Shear Strength	1150 N
Tensile Strength	1420 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

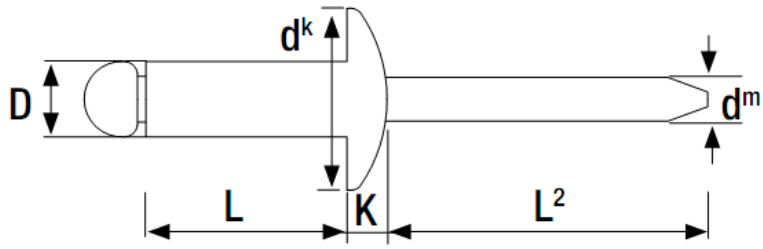



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	6.0	1.5	3.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	12.0	7.0	8.5	3.3	6.5	0.8	1.95	26.0	535	670	1000
	14.0	8.5	10.5	3.3	6.5	0.8	1.95	26.0	535	670	1000
	16.0	10.5	12.5	3.3	6.5	0.8	1.95	26.0	535	670	800
4.0	6.0	1.0	2.0	3.3	6.5	0.8	1.95	26.0	535	670	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	10.0	4.0	6.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	12.0	6.0	8.0	4.1	8.0	1.0	2.45	27.0	845	1025	800
	14.0	8.0	10.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	16.0	10.0	12.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.45	27.0	845	1025	500
	20.0	14.0	16.0	4.1	8.0	1.0	2.45	27.0	845	1025	250
4.8	8.0	2.0	3.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	10.0	3.5	5.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	12.0	5.5	7.5	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	14.0	7.5	9.0	4.9	9.5	1.1	2.90	28.0	1150	1420	500
	16.0	9.0	11.0	4.9	9.5	1.1	2.90	28.0	1150	1420	400
	18.0	11.0	13.0	4.9	9.5	1.1	2.90	28.0	1150	1420	400
	20.0	13.0	15.0	4.9	9.5	1.1	2.90	28.0	1150	1420	350
	25.0	15.0	20.0	4.9	9.5	1.1	2.90	28.0	1150	1420	250
	30.0	20.0	25.0	4.9	9.5	1.1	2.90	28.0	1150	1420	200