
RS PRO Aluminium/Aluminium Dome Head Blind Rivet, 6.4 mm Diameter x 20.5mm long

Supplier Part Number: OJADH6420

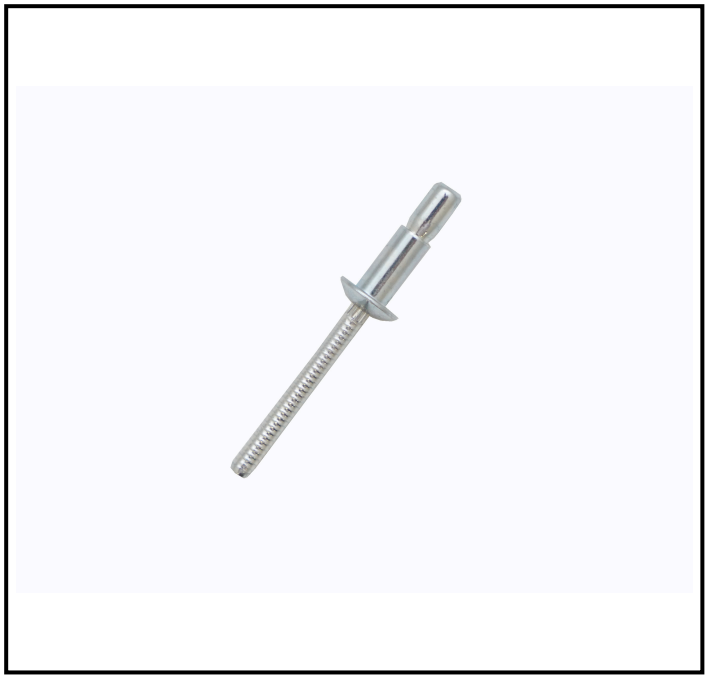

FEATURES

- **Dome Head:** Provides a neat finish and distributes load evenly.
- **Aluminium Construction:** Offers excellent corrosion resistance and lightweight properties.
- **Blind Rivet Design:** Allows for installation from one side, ideal for inaccessible areas.
- **Wide Grip Range:** Accommodates material thicknesses from 2 mm to 15.9 mm.
- **Compliance with Standards:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a 6.4 mm diameter and a dome head, this rivet provides a reliable solution for joining materials where access is only available from one side. Its aluminium construction ensures lightweight durability, making it ideal for use in environments where corrosion resistance is essential.

General Specifications

Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.9 mm
Mandrel Material	Aluminium
Maximum Grip	15.9 mm
Minimum Grip	2 mm


Mechanical Specifications

Head Diameter	13.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	6.4 mm
Rivet Length	20.5 mm
Shear Strength	5400 N
Tensile Strength	3600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

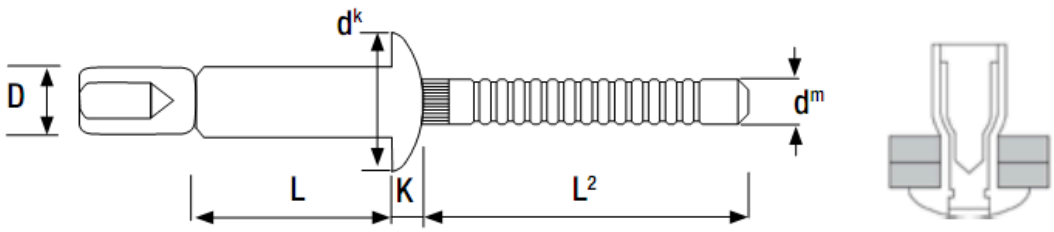

Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Mandrel Retention Strength N	Box Quantity
D	L				dk	K	dm	L2				
4.8	10.0	1.8	6.9	4.9-5.1	10.0	2.2	3.00	26.0	2400	2000	222	250
	14.5	1.8	11.0	4.9-5.1	10.0	2.2	3.00	26.0	2400	2000	222	250
6.4	14.5	2.0	9.5	6.6-6.9	13.5	3.0	4.00	26.0	5400	3600	445	200
	20.5	2.0	15.9	6.6-6.9	13.5	3.0	4.00	26.0	5400	3600	445	150