
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3 mm Diameter x 12 mm long

Supplier Part Number: OJASD3012

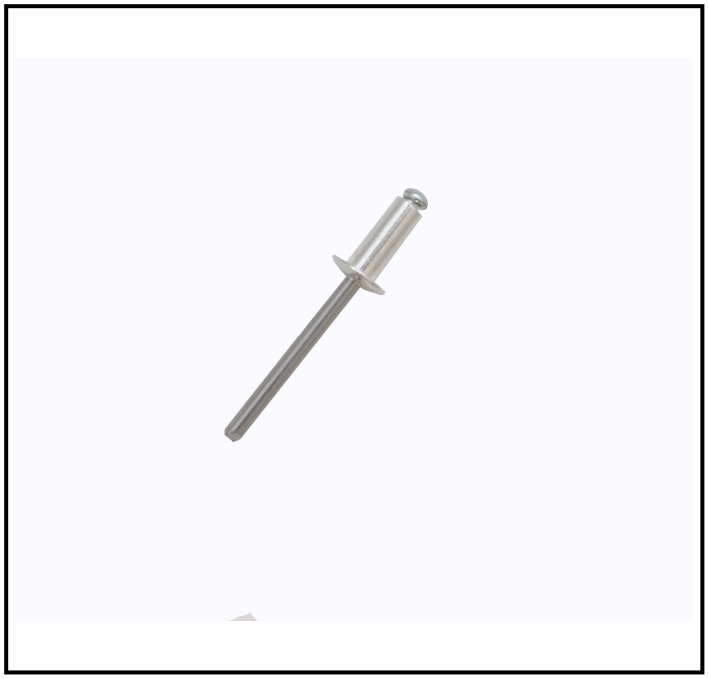

FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting performance.
- **Steel Mandrel:** Provides strong support and ensures a secure fastening.
- **Dome Head Type:** Offers a smooth finish and distributes load evenly.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for extended durability.
- **3.1 mm Fixing Hole Diameter:** Suitable for precise and secure installations.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3 mm Aluminium Blind Rivet is designed for secure fastening in applications where access is limited to one side. Ideal for joining materials such as metal and plastic, this rivet provides a reliable and durable connection. Its aluminium body ensures lightweight strength, while the steel mandrel offers robust support during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	9 mm
Minimum Grip	7 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3 mm
Rivet Length	12 mm
Shear Strength	620 N
Tensile Strength	810 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

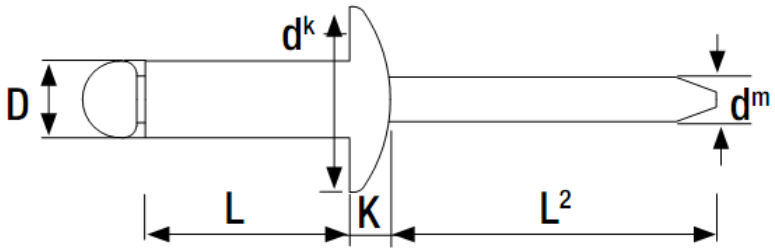



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.0	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	8.0	3.5	5.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	14.0	9.0	11.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	16.0	11.0	12.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	18.0	13.0	14.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	20.0	14.5	16.5	3.1	6.5	0.8	1.75	26.0	620	810	500
3.2	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	750
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	800
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	700
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500