
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3 mm Diameter x 14 mm long

Supplier Part Number: OJASD3014

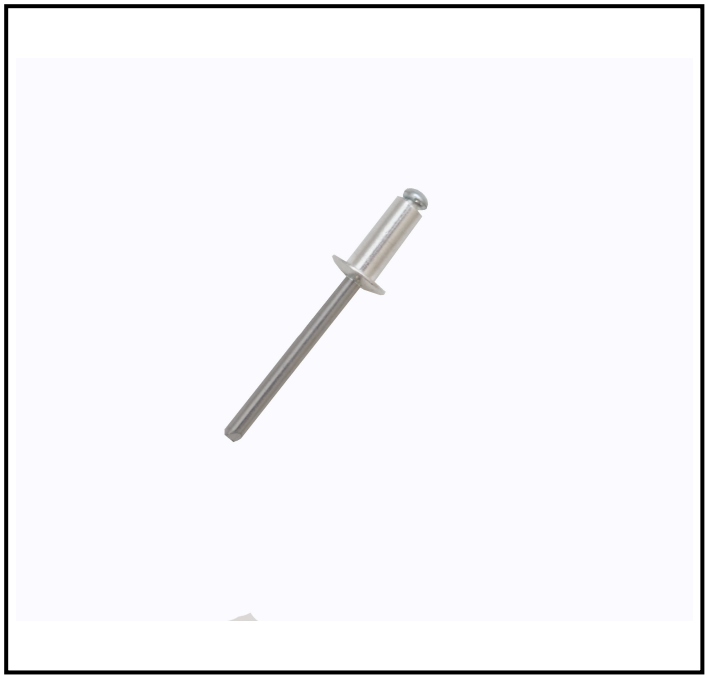

FEATURES

- **Aluminium Body:** Offers a lightweight and corrosion-resistant fastening solution.
- **Steel Mandrel:** Provides additional strength and durability during installation.
- **Dome Head Type:** Ensures a neat and flush finish for aesthetic applications.
- **3 mm Rivet Diameter:** Suitable for a range of standard fastening requirements.
- **14 mm Rivet Length:** Accommodates materials with a grip range of 9 mm to 11 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for long-lasting performance.
- **Compliance with DIN 7337:** Meets international standards for quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3 mm Blind Rivet Aluminium is designed for secure fastening in a variety of applications. This blind rivet is ideal for situations where access is only possible from one side, providing a reliable and durable connection. Its aluminium body ensures a lightweight yet strong hold, making it suitable for both industrial and commercial use.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	11 mm
Minimum Grip	9 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3 mm
Rivet Length	14 mm
Shear Strength	620 N
Tensile Strength	810 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

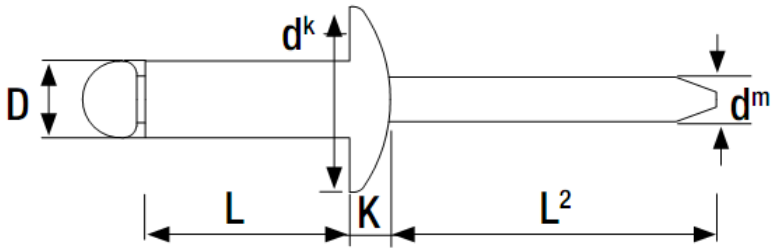



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.0	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	8.0	3.5	5.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	14.0	9.0	11.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	16.0	11.0	12.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	18.0	13.0	14.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	20.0	14.5	16.5	3.1	6.5	0.8	1.75	26.0	620	810	500
3.2	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	750
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	800
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	700
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500