
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3 mm Diameter x 20 mm long

Supplier Part Number: OJASD3020

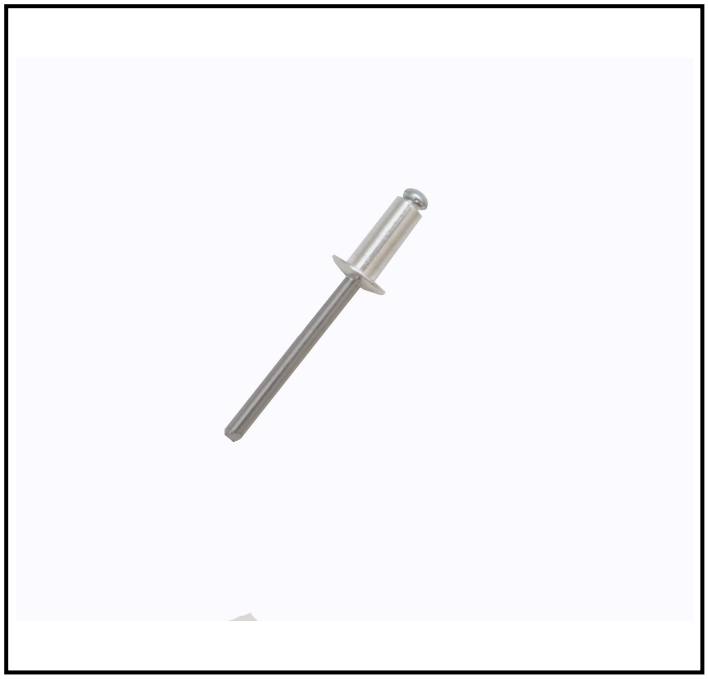

FEATURES

- **Rivet Diameter:** 3 mm for precise fitting in pre-drilled holes
- **Rivet Length:** 20 mm suitable for materials with a combined thickness of 14.5 mm to 16.5 mm
- **Head Type:** Dome head for a neat and flush finish
- **Mandrel Material:** Steel mandrel provides enhanced strength and durability
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 3 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. This aluminium rivet with a steel mandrel ensures a strong and reliable joint, ideal for various industrial and construction uses.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.1 mm
Mandrel Material	Steel
Maximum Grip	16.5 mm
Minimum Grip	14.5 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3 mm
Rivet Length	20 mm
Shear Strength	620 N
Tensile Strength	810 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

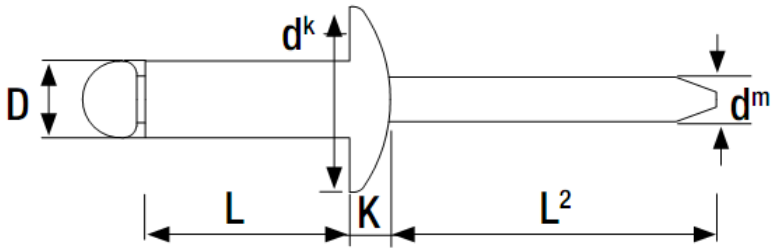



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.0	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	8.0	3.5	5.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	14.0	9.0	11.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	16.0	11.0	12.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	18.0	13.0	14.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	20.0	14.5	16.5	3.1	6.5	0.8	1.75	26.0	620	810	500
3.2	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	750
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	800
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	700
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500