
FEATURES

- **Aluminium Body:** Provides lightweight strength and corrosion resistance.
- **Steel Mandrel:** Ensures strong and reliable fastening.
- **Dome Head:** Offers a smooth finish and distributes load evenly.
- **3.2 mm Diameter:** Suitable for precise and small-scale applications.
- **25 mm Length:** Accommodates a wide grip range for versatile use.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.

RS PRO Aluminium/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 25 mm long

Supplier Part Number: OJASD3225

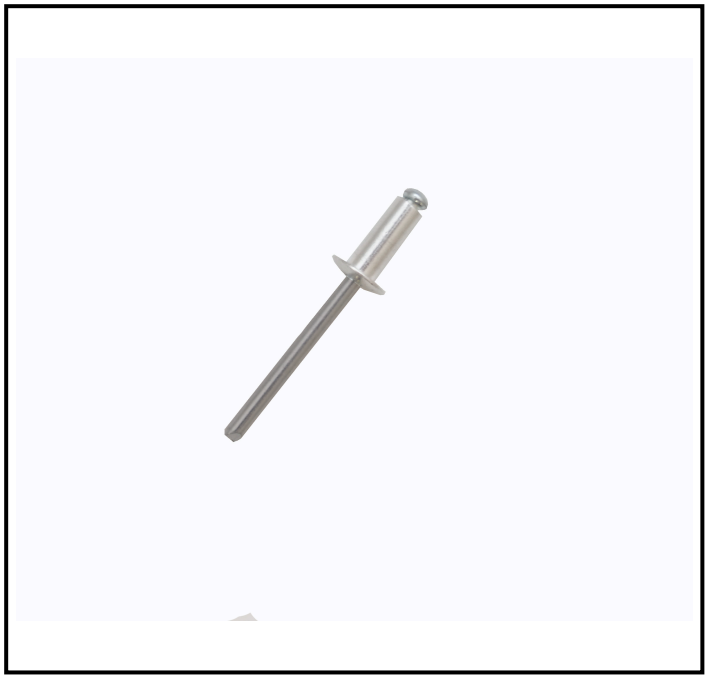

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is only available from one side. With a 3.2 mm diameter and a length of 25 mm, this rivet is ideal for joining materials with a grip range between 17 mm and 21 mm. Its aluminium body and steel mandrel ensure durability and resistance to corrosion, making it suitable for various industrial environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	21 mm
Minimum Grip	17 mm


Mechanical Specifications


Head Diameter	6.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	25 mm
Shear Strength	760 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

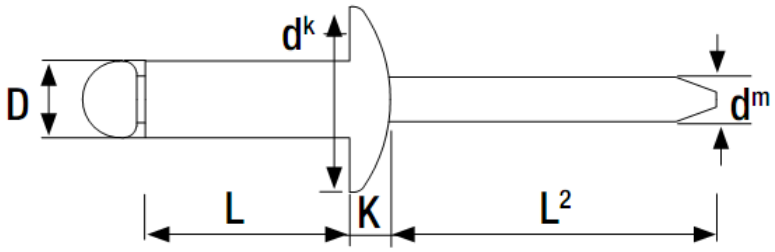



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
2.4	4.0	0.5	2.0	2.5	5.0	0.7	1.45	26.0	315	355	1000
	6.0	1.5	3.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	8.0	3.5	5.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	10.0	5.5	7.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
	12.0	7.5	9.5	2.5	5.0	0.7	1.45	26.0	315	355	1000
3.0	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	8.0	3.5	5.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	10.0	5.5	7.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	12.0	7.0	9.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	14.0	9.0	11.0	3.1	6.5	0.8	1.75	26.0	620	810	1000
	16.0	11.0	12.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	18.0	13.0	14.5	3.1	6.5	0.8	1.75	26.0	620	810	800
	20.0	14.5	16.5	3.1	6.5	0.8	1.75	26.0	620	810	500
3.2	4.0	0.5	1.5	3.1	6.5	0.8	1.75	26.0	620	810	1000
	6.0	1.5	3.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	8.0	3.0	5.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	10.0	5.0	7.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	12.0	7.0	9.0	3.3	6.5	0.8	1.75	26.0	760	980	750
	14.0	9.0	11.0	3.3	6.5	0.8	1.75	26.0	760	980	1000
	16.0	11.0	12.5	3.3	6.5	0.8	1.75	26.0	760	980	800
	18.0	12.5	14.5	3.3	6.5	0.8	1.75	26.0	760	980	700
	20.0	14.5	16.5	3.3	6.5	0.8	1.75	26.0	760	980	500
	25.0	17.0	21.0	3.3	6.5	0.8	1.75	26.0	760	980	500