
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 30 mm long

Supplier Part Number: OJASD4030

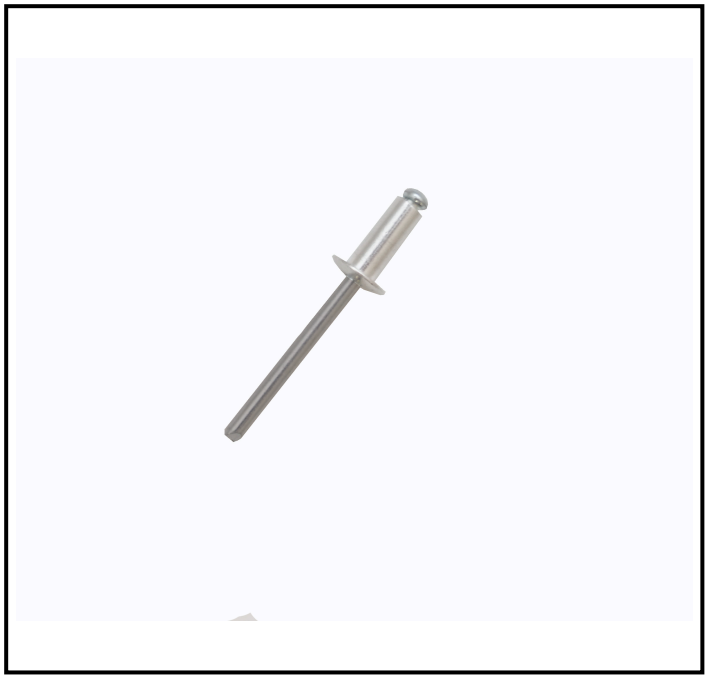

FEATURES

- **Aluminium Body:** Provides lightweight yet strong fastening.
- **Steel Mandrel:** Enhances the rivet's tensile strength and durability.
- **Dome Head:** Offers a smooth and aesthetically pleasing finish.
- **Trivalent Chromate Finish:** Provides excellent corrosion resistance.
- **Wide Grip Range:** Accommodates material thicknesses from 21.5 mm to 26 mm.
- **Compliance with Standards:** Meets DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, and ISO TS 16949:2009 for quality and environmental management.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a reliable solution for fastening applications with its 4 mm Blind Rivet. Designed for secure and efficient assembly, this rivet is ideal for situations where access is only available from one side. The combination of an aluminium body and a steel mandrel ensures durability and strength, making it suitable for various industrial uses.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	26 mm
Minimum Grip	21.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	30 mm
Shear Strength	1200 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

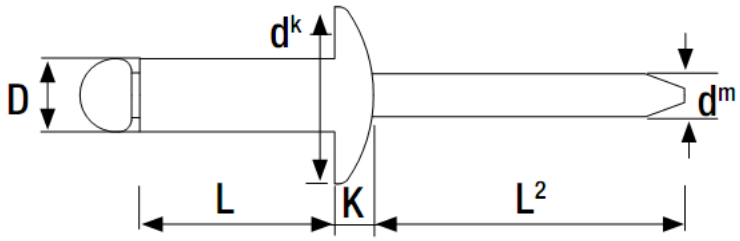



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.0	6.0	1.0	2.0	4.1	8.0	1.0	2.10	27.0	1200	1600	1000
	8.0	2.0	4.0	4.1	8.0	1.0	2.10	27.0	1200	1600	750
	10.0	4.0	6.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	12.0	6.0	8.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	14.0	8.0	10.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	16.0	10.0	12.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	18.0	12.0	14.0	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	20.0	14.0	15.5	4.1	8.0	1.0	2.10	27.0	1200	1600	500
	25.0	18.0	20.0	4.1	8.0	1.0	2.10	27.0	1200	1600	350
	30.0	21.5	26.0	4.1	8.0	1.0	2.10	27.0	1200	1600	250
4.8	6.0	1.0	2.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	8.0	2.0	3.5	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	10.0	3.5	5.5	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	12.0	5.5	7.5	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	14.0	7.5	9.5	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	16.0	9.0	11.0	4.9	9.5	1.1	2.70	28.0	1700	2250	500
	18.0	11.0	13.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	20.0	13.0	15.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	22.0	15.0	17.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250