
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 28 mm long

Supplier Part Number: OJASD4828

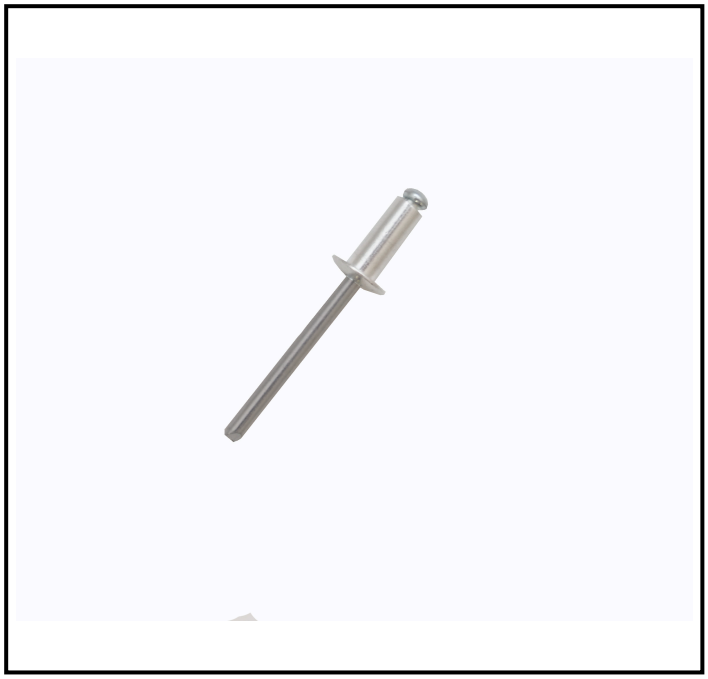

FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant fastening.
- **Steel Mandrel:** Provides robust installation strength.
- **Dome Head:** Ensures a neat and flush finish.
- **4.8 mm Diameter:** Suitable for a variety of applications.
- **Grip Range 20-23 mm:** Accommodates different material thicknesses.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is limited to one side. With a 4.8 mm diameter and a length of 28 mm, this rivet is ideal for joining materials with a grip range of 20 mm to 23 mm. The aluminium body ensures lightweight durability, while the steel mandrel provides strength during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.9 mm
Mandrel Material	Steel
Maximum Grip	23 mm
Minimum Grip	20 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	28 mm
Shear Strength	1700 N
Tensile Strength	2250 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

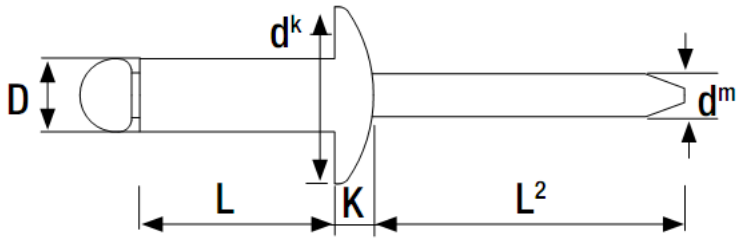



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	25.0	17.0	20.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	28.0	20.0	23.0	4.9	9.5	1.1	2.70	28.0	1700	2250	200
	30.0	23.0	24.5	4.9	9.5	1.1	2.70	28.0	1700	2250	200
	35.0	24.5	29.0	4.9	9.5	1.1	2.70	28.0	1700	2250	150
	40.0	30.0	35.0	4.9	9.5	1.1	2.70	28.0	1700	2250	150
5.0	6.0	1.0	2.0	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	8.0	2.0	3.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	10.0	3.5	5.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	12.0	5.5	7.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	14.0	7.5	9.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	16.0	9.0	11.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	18.0	11.0	13.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	20.0	13.0	15.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	25.0	15.0	20.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	30.0	23.0	24.5	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	35.0	24.5	29.0	5.1	9.5	1.1	2.70	28.0	2000	2800	150
	40.0	30.0	35.0	5.1	9.5	1.1	2.70	28.0	2000	2800	150