
RS PRO Aluminium/Steel Dome Head Blind Rivet, 5 mm Diameter x 20 mm long

Supplier Part Number: OJASD5020

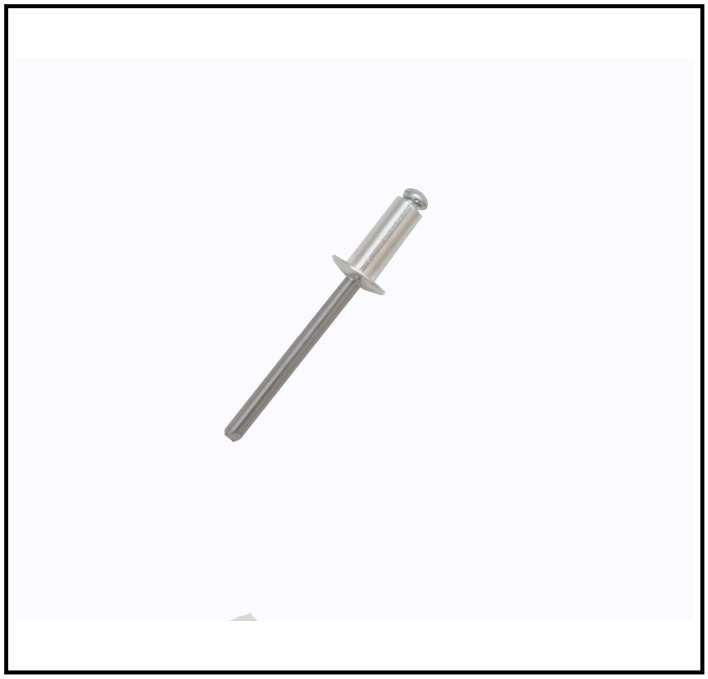

FEATURES

- **Aluminium Body:** Provides excellent corrosion resistance and lightweight properties.
- **Steel Mandrel:** Ensures high tensile strength and secure fastening.
- **Blind Rivet Design:** Allows for installation from one side of the workpiece, ideal for hard-to-reach areas.
- **5 mm Diameter:** Suitable for a wide range of applications requiring medium-sized rivets.
- **20 mm Length:** Accommodates materials with a thickness between 13 mm and 15 mm.
- **Dome Head Type:** Offers a clean and smooth finish on the surface.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and durability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 5 mm Blind Rivet is designed for secure and reliable fastening in various industrial applications. With an aluminium body and a steel mandrel, this rivet offers durability and strength, making it ideal for use in environments where corrosion resistance is essential.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Steel
Maximum Grip	15 mm
Minimum Grip	13 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	5 mm
Rivet Length	20 mm
Shear Strength	2000 N
Tensile Strength	2800 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

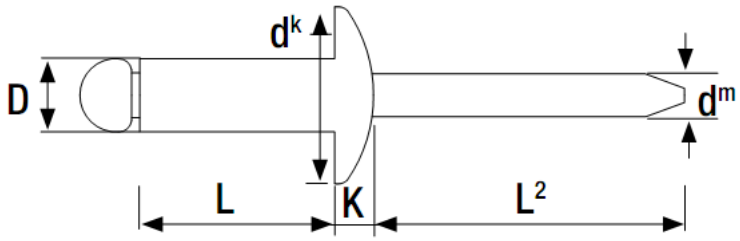



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
4.8	25.0	17.0	20.0	4.9	9.5	1.1	2.70	28.0	1700	2250	250
	28.0	20.0	23.0	4.9	9.5	1.1	2.70	28.0	1700	2250	200
	30.0	23.0	24.5	4.9	9.5	1.1	2.70	28.0	1700	2250	200
	35.0	24.5	29.0	4.9	9.5	1.1	2.70	28.0	1700	2250	150
	40.0	30.0	35.0	4.9	9.5	1.1	2.70	28.0	1700	2250	150
5.0	6.0	1.0	2.0	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	8.0	2.0	3.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	10.0	3.5	5.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	12.0	5.5	7.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	14.0	7.5	9.5	5.1	9.5	1.1	2.70	28.0	2000	2800	500
	16.0	9.0	11.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	18.0	11.0	13.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	20.0	13.0	15.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	25.0	15.0	20.0	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	30.0	23.0	24.5	5.1	9.5	1.1	2.70	28.0	2000	2800	250
	35.0	24.5	29.0	5.1	9.5	1.1	2.70	28.0	2000	2800	150
	40.0	30.0	35.0	5.1	9.5	1.1	2.70	28.0	2000	2800	150