
RS PRO Aluminium/Steel Dome Head Blind Rivet, 6 mm Diameter x 16 mm long

Supplier Part Number: OJASD6016

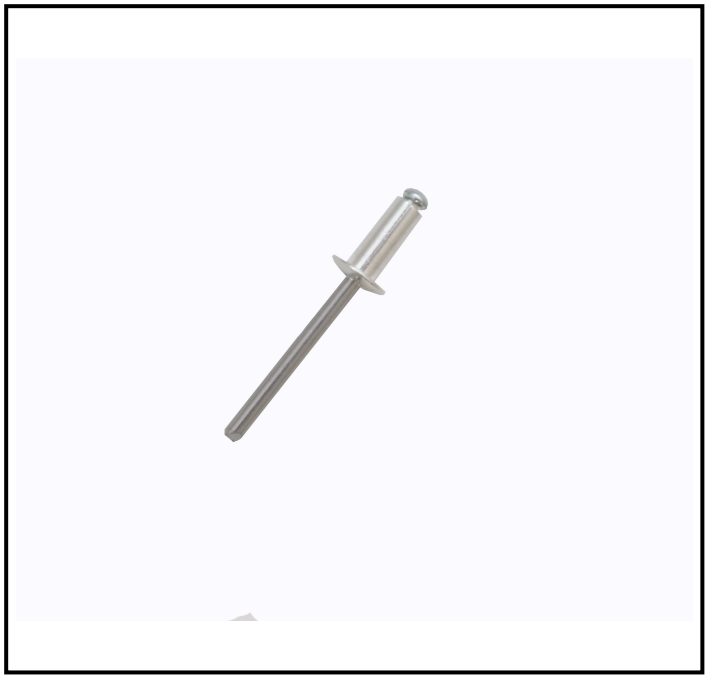

FEATURES

- **Rivet Body Material:** Aluminium ensures lightweight and corrosion-resistant fastening.
- **Mandrel Material:** Steel mandrel provides strength and durability during installation.
- **Head Type:** Dome head offers a smooth finish and distributes load evenly.
- **Finish:** Trivalent Chromate Zinc finish enhances corrosion resistance.
- **Rivet Diameter:** 6 mm diameter suitable for a range of applications.
- **Rivet Length:** 16 mm length accommodates different material thicknesses.
- **Grip Range:** 8.5 mm to 10.5 mm grip range for versatile use.
- **Fixing Hole Diameter:** 6.1 mm for precise and secure fitting.
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality 6 mm Aluminium Blind Rivet designed for secure fastening in various industrial applications. With a dome head type and a steel mandrel, this rivet provides reliable performance and ease of installation. Ideal for applications requiring a strong, permanent joint.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.1 mm
Mandrel Material	Steel
Maximum Grip	10.5 mm
Minimum Grip	8.5 mm


Mechanical Specifications


Head Diameter	12 mm
Rivet Body Material	Aluminium
Rivet Diameter	6 mm
Rivet Length	16 mm
Shear Strength	3000 N
Tensile Strength	3800 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

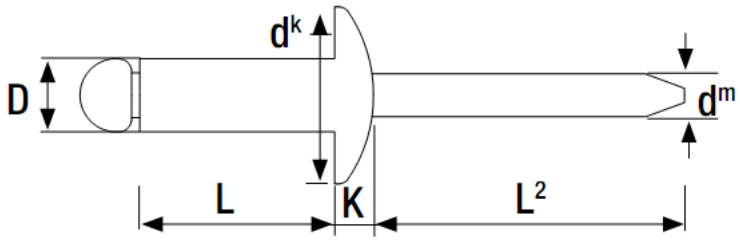



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	8.0	1.0	3.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	10.0	3.0	4.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	14.0	6.0	8.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	16.0	8.5	10.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	18.0	10.5	12.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	20.0	12.0	14.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	26.0	16.0	20.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	30.0	20.0	23.0	6.1	12.0	1.5	3.60	30.0	3000	3800	150
6.4	10.0	1.0	3.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	20.0	11.0	13.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	35.0	23.0	28.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	40.0	28.0	33.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100