
RS PRO Aluminium/Steel Dome Head Blind Rivet, 6 mm Diameter x 18 mm long

Supplier Part Number: OJASD6018

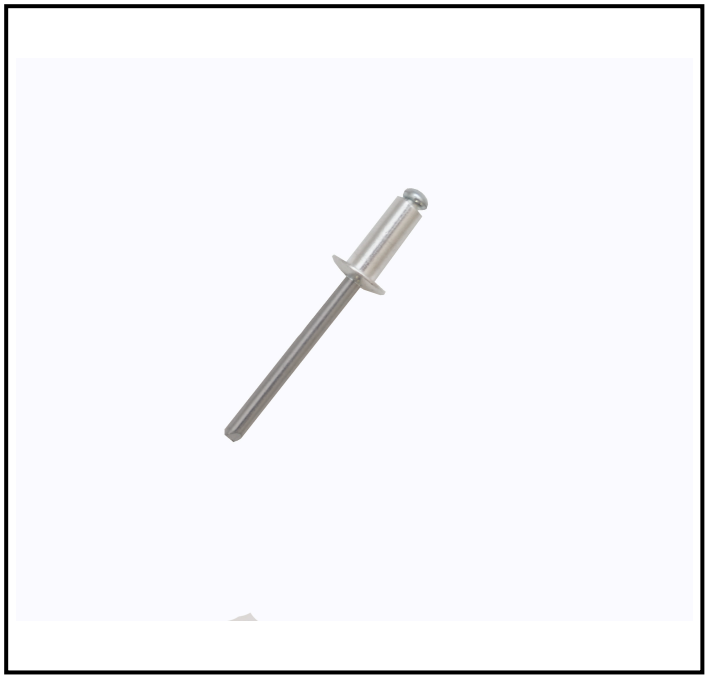

FEATURES

- **Rivet Diameter:** 6 mm for standard fastening applications
- **Rivet Length:** 18 mm to accommodate thicker materials
- **Head Type:** Dome for a smooth finish
- **Mandrel Material:** Steel for enhanced strength and durability
- **Rivet Body Material:** Aluminium for lightweight and corrosion resistance
- **Finish:** Clear Trivalent Chromate Zinc for added protection against corrosion
- **Fixing Hole Diameter:** 6.1 mm for precise installation
- **Standards:** Complies with DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 6 mm Blind Rivet is designed for secure fastening in applications where access is only available from one side. Made from durable aluminium with a steel mandrel, it offers reliable performance in various industrial settings. Ideal for joining materials with a grip range of 10.5 mm to 12 mm.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.1 mm
Mandrel Material	Steel
Maximum Grip	12 mm
Minimum Grip	10.5 mm


Mechanical Specifications


Head Diameter	12 mm
Rivet Body Material	Aluminium
Rivet Diameter	6 mm
Rivet Length	18 mm
Shear Strength	3000 N
Tensile Strength	3800 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

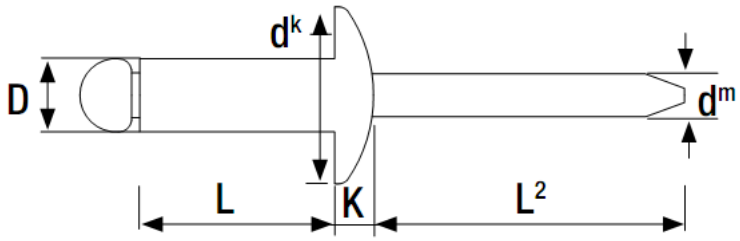



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	8.0	1.0	3.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	10.0	3.0	4.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	14.0	6.0	8.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	16.0	8.5	10.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	18.0	10.5	12.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	20.0	12.0	14.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	26.0	16.0	20.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	30.0	20.0	23.0	6.1	12.0	1.5	3.60	30.0	3000	3800	150
6.4	10.0	1.0	3.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	20.0	11.0	13.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	35.0	23.0	28.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	40.0	28.0	33.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100