
RS PRO Aluminium/Steel Dome Head Blind Rivet, 6 mm Diameter x 20 mm long

Supplier Part Number: OJASD6020

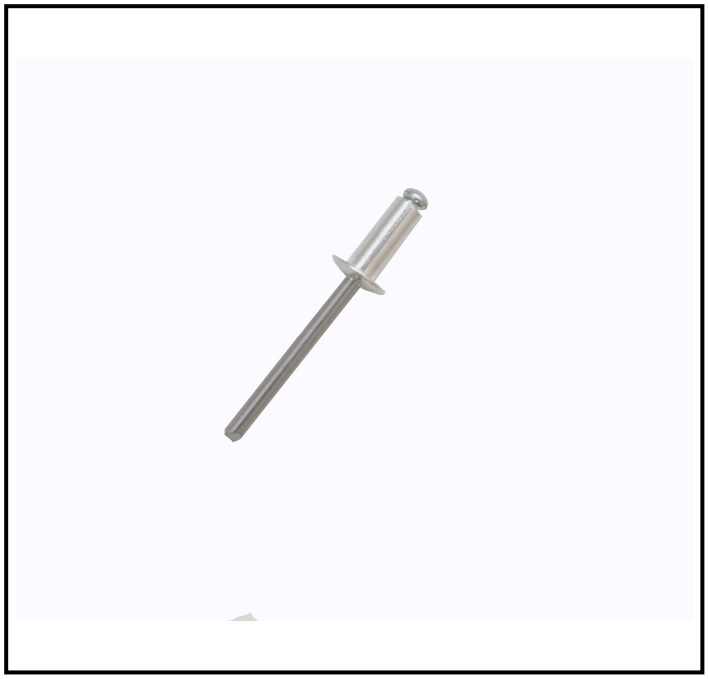

FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant properties.
- **Steel Mandrel:** Provides robust support during the fastening process.
- **Blind Rivet Design:** Allows for installation where only one side is accessible.
- **6 mm Diameter:** Suitable for a range of medium-duty applications.
- **12 mm Head Diameter:** Ensures a secure hold with a dome head type.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and durability.
- **Compliance with DIN 7337:** Meets industry standards for quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a 6 mm diameter and a 20 mm length, this rivet is ideal for joining materials where access is only possible from one side. Its aluminium body ensures lightweight durability, while the steel mandrel provides strength during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.1 mm
Mandrel Material	Steel
Maximum Grip	14 mm
Minimum Grip	12 mm


Mechanical Specifications


Head Diameter	12 mm
Rivet Body Material	Aluminium
Rivet Diameter	6 mm
Rivet Length	20 mm
Shear Strength	3000 N
Tensile Strength	3800 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

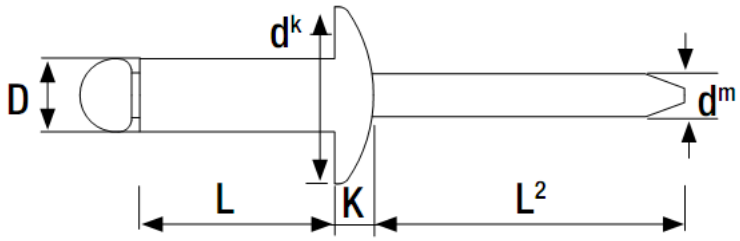



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	8.0	1.0	3.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	10.0	3.0	4.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	14.0	6.0	8.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	16.0	8.5	10.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	18.0	10.5	12.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	20.0	12.0	14.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	26.0	16.0	20.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	30.0	20.0	23.0	6.1	12.0	1.5	3.60	30.0	3000	3800	150
6.4	10.0	1.0	3.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	20.0	11.0	13.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	35.0	23.0	28.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	40.0	28.0	33.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100