
RS PRO Aluminium/Steel Dome Head Blind Rivet, 6.4 mm Diameter x 30 mm long

Supplier Part Number: OJASD6430

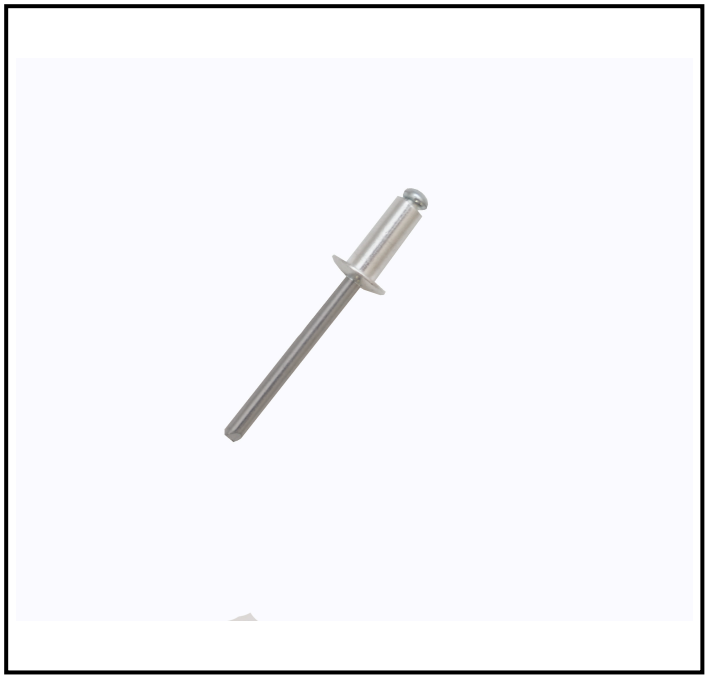

FEATURES

- **Dome Head:** Provides a neat and smooth finish.
- **Steel Mandrel:** Ensures high tensile strength and durability.
- **Aluminium Body:** Offers corrosion resistance and lightweight properties.
- **6.4 mm Diameter:** Suitable for a range of applications requiring medium-sized rivets.
- **30 mm Length:** Accommodates thicker materials with a grip range of 19 mm to 23 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of industrial applications. With a dome head and steel mandrel, it provides reliable performance and ease of installation. Ideal for use where access is only possible from one side, this blind rivet ensures a strong and durable hold.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Steel
Maximum Grip	23 mm
Minimum Grip	19 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Aluminium
Rivet Diameter	6.4 mm
Rivet Length	30 mm
Shear Strength	3150 N
Tensile Strength	4100 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

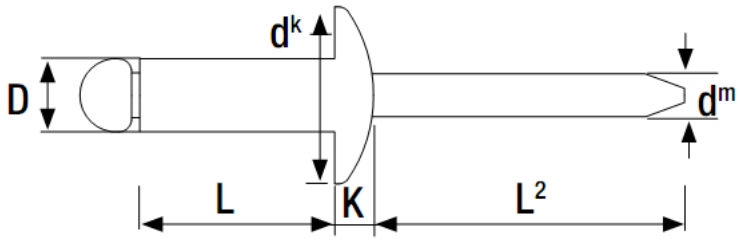



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	8.0	1.0	3.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	10.0	3.0	4.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	14.0	6.0	8.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	16.0	8.5	10.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	18.0	10.5	12.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	20.0	12.0	14.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	26.0	16.0	20.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	30.0	20.0	23.0	6.1	12.0	1.5	3.60	30.0	3000	3800	150
6.4	10.0	1.0	3.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	20.0	11.0	13.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	35.0	23.0	28.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	40.0	28.0	33.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100