
RS PRO Aluminium/Steel Dome Head Blind Rivet, 6.4 mm Diameter x 40 mm long

Supplier Part Number: OJASD6440

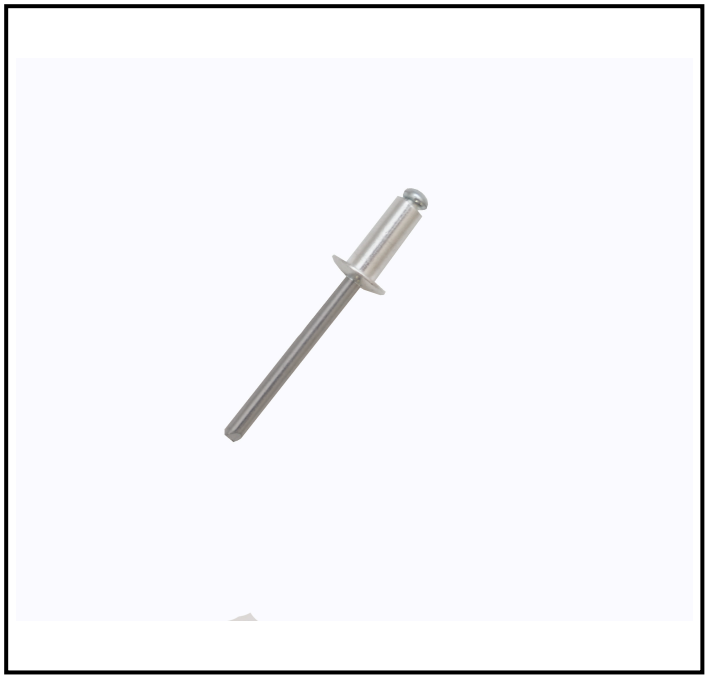

FEATURES

- **Rivet Diameter:** 6.4 mm for optimal fastening strength
- **Rivet Length:** 40 mm suitable for a wide range of material thicknesses
- **Head Type:** Dome head provides a neat finish
- **Mandrel Material:** Steel mandrel for enhanced pulling force
- **Finish:** Clear trivalent chromate zinc for corrosion resistance
- **Grip Range:** 28 mm to 33 mm accommodating different material thicknesses
- **Standards Compliance:** Meets DIN 7337 and ISO standards for quality assurance

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This aluminium rivet with a steel mandrel is ideal for situations where access is only possible from one side. Its robust construction ensures reliable performance and durability.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	6.5 mm
Mandrel Material	Steel
Maximum Grip	33 mm
Minimum Grip	28 mm


Mechanical Specifications


Head Diameter	13 mm
Rivet Body Material	Aluminium
Rivet Diameter	6.4 mm
Rivet Length	40 mm
Shear Strength	3150 N
Tensile Strength	4100 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Additional Image 1

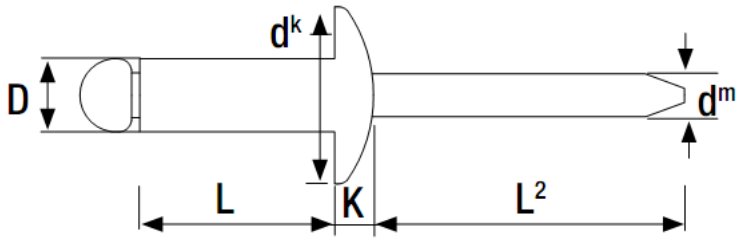



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
6.0	8.0	1.0	3.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	10.0	3.0	4.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	12.0	4.5	6.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	14.0	6.0	8.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	16.0	8.5	10.5	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	18.0	10.5	12.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	20.0	12.0	14.0	6.1	12.0	1.5	3.60	30.0	3000	3800	250
	22.0	12.0	16.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	26.0	16.0	20.0	6.1	12.0	1.5	3.60	30.0	3000	3800	200
	30.0	20.0	23.0	6.1	12.0	1.5	3.60	30.0	3000	3800	150
6.4	10.0	1.0	3.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	12.0	3.5	5.5	6.5	13.0	1.8	3.85	32.0	3150	4100	250
	15.0	5.5	8.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	18.0	8.5	11.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	20.0	11.0	13.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	22.0	11.5	15.5	6.5	13.0	1.8	3.85	32.0	3150	4100	200
	26.0	15.5	19.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	30.0	19.0	23.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	35.0	23.0	28.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100
	40.0	28.0	33.0	6.5	13.0	1.8	3.85	32.0	3150	4100	100