
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 14 mm long

Supplier Part Number: OJASDG3214

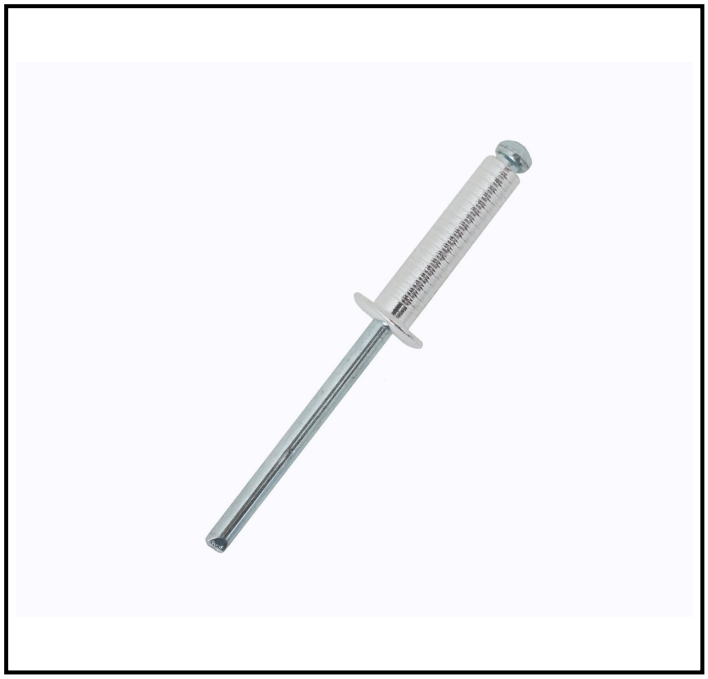

FEATURES

- **Aluminium Body:** Provides excellent corrosion resistance for long-lasting durability.
- **Steel Mandrel:** Ensures strong and secure fastening.
- **Dome Head:** Offers a neat and flush finish.
- **3.2 mm Diameter:** Suitable for a variety of applications.
- **14 mm Length:** Accommodates materials with a maximum grip of 10 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and appearance.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO Aluminium Blind Rivets are designed for secure fastening in applications where access is only available from one side. These rivets provide a reliable and durable solution for joining materials such as metal, plastic, and wood. The aluminium body ensures corrosion resistance, making them ideal for outdoor and industrial environments.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.4 mm
Mandrel Material	Steel
Maximum Grip	10 mm


Mechanical Specifications


Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	14 mm
Shear Strength	525 N
Tensile Strength	930 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

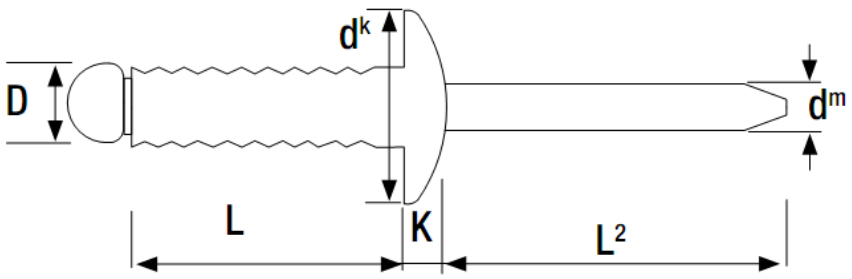



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	Max =	6.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
	14.0	Max =	10.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
4.0	8.0	Max =	4.0	3.4	6.0	1.4	1.80	26.0	525	930	800
	10.0	Max =	6.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	12.0	Max =	8.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	14.0	Max =	10.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	16.0	Max =	12.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
4.8	8.0	Max =	4.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	10.0	Max =	6.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	11.0	Max =	7.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	12.0	Max =	8.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	14.0	Max =	10.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	16.0	Max =	12.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	18.0	Max =	14.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	20.0	Max =	16.0	5.1	9.5	2.0	2.65	28.0	1185	1575	350
	25.0	Max =	21.0	5.1	9.5	2.0	2.65	28.0	1185	1575	250