
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 8 mm long

Supplier Part Number: OJASDG4808

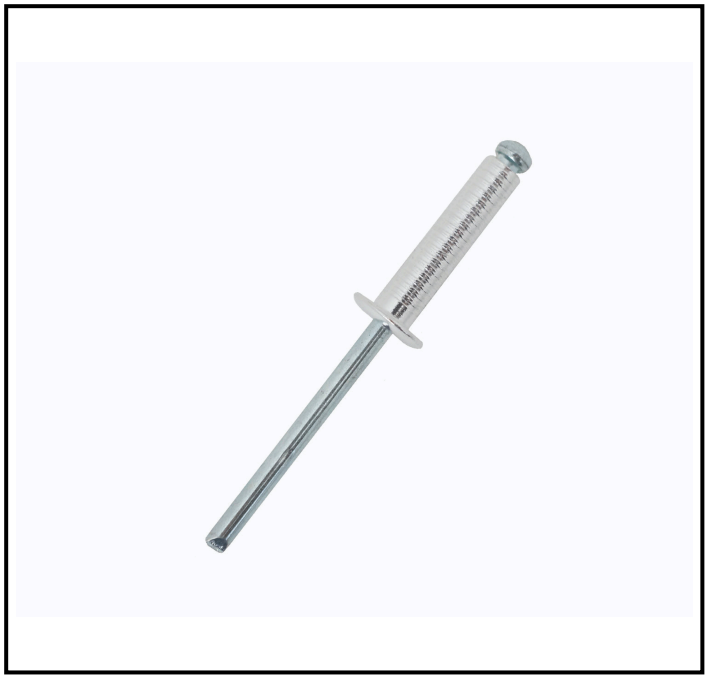

FEATURES

- **Aluminium Body:** Offers lightweight and corrosion-resistant fastening.
- **Steel Mandrel:** Provides high tensile strength for secure installations.
- **Dome Head:** Ensures a neat finish with a 9.5 mm head diameter.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for long-lasting performance.
- **Maximum Grip:** Accommodates material thicknesses up to 4 mm.
- **Fixing Hole Diameter:** Compatible with 5.1 mm holes for easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

This RS PRO Aluminium Blind Rivet is designed for secure fastening in a variety of industrial applications. With a 4.8 mm diameter and 8 mm length, it is ideal for joining materials where access is only available from one side. The rivet's aluminium body ensures lightweight durability, while the steel mandrel provides reliable strength.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Steel
Maximum Grip	4 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	8 mm
Shear Strength	1185 N
Tensile Strength	1575 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

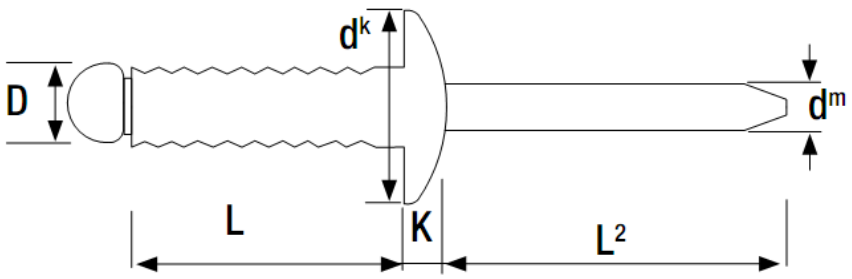



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	Max =	6.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
	14.0	Max =	10.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
4.0	8.0	Max =	4.0	3.4	6.0	1.4	1.80	26.0	525	930	800
	10.0	Max =	6.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	12.0	Max =	8.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	14.0	Max =	10.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	16.0	Max =	12.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
4.8	8.0	Max =	4.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	10.0	Max =	6.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	11.0	Max =	7.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	12.0	Max =	8.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	14.0	Max =	10.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	16.0	Max =	12.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	18.0	Max =	14.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	20.0	Max =	16.0	5.1	9.5	2.0	2.65	28.0	1185	1575	350
	25.0	Max =	21.0	5.1	9.5	2.0	2.65	28.0	1185	1575	250