
# RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 10 mm long

Supplier Part Number: OJASDG4810

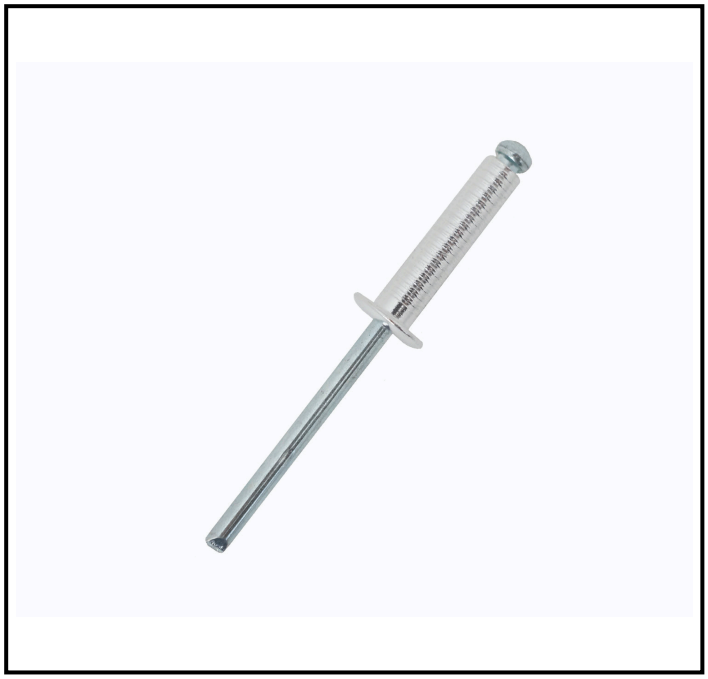

## FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-term durability.
- **Steel Mandrel:** Provides additional strength and reliability during installation.
- **Dome Head:** Offers a neat and smooth finish for aesthetic appeal.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for extended lifespan.
- **5.1 mm Fixing Hole Diameter:** Suitable for a wide range of applications.
- **Maximum Grip of 6 mm:** Accommodates various material thicknesses.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in a variety of applications. This rivet features an aluminium body and a steel mandrel, providing a reliable and durable solution for joining materials. Ideal for use where access is only available from one side, it ensures a strong and lasting hold.

## General Specifications

| | |
|---|---|
| Finish | Clear, Trivalent Chromate, Zinc |
| Head Type | Dome |
| Product Type | Blind Rivet |
| Rivet Type | Blind |
| Fixing Hole Diameter | 5.1 mm |
| Mandrel Material | Steel |
| Maximum Grip | 6 mm |


## Mechanical Specifications


| | |
|---|---|
| Head Diameter | 9.5 mm |
| Rivet Body Material | Aluminium |
| Rivet Diameter | 4.8 mm |
| Rivet Length | 10 mm |
| Shear Strength | 1185 N |
| Tensile Strength | 1575 N |

## Approvals

| | |
|---|---|
| Standards/Approvals | DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009 |

## Technical Diagrams

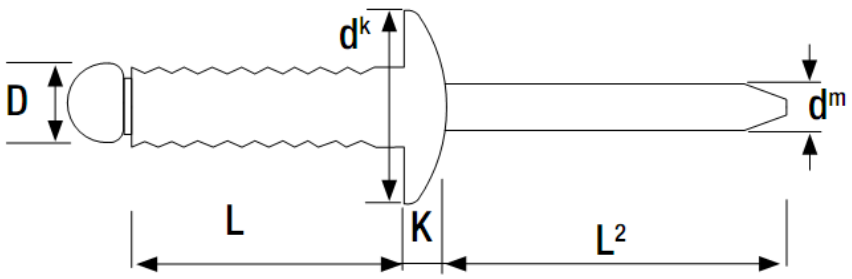

| Nominal Diameter mm | Body Length mm | Grip Range Min mm | Grip Range Max mm | Hole Size mm | Flange Diameter mm | Flange Thickness mm | Nom. Mandrel Diameter mm | Min Mandrel Length mm | Shear Strength N | Tensile Strength N | Box Quantity |
|---|---|---|---|---|---|---|---|---|---|---|---|
| D | L | | | | dk | K | dm | L2 | | | |
| **3.2** | 10.0 | Max = | 6.0 | 3.4 | 6.0 | 1.4 | 1.80 | 26.0 | 525 | 930 | 1000 |
| | 14.0 | Max = | 10.0 | 3.4 | 6.0 | 1.4 | 1.80 | 26.0 | 525 | 930 | 1000 |
| **4.0** | 8.0 | Max = | 4.0 | 3.4 | 6.0 | 1.4 | 1.80 | 26.0 | 525 | 930 | 800 |
| | 10.0 | Max = | 6.0 | 4.3 | 8.0 | 1.7 | 2.20 | 27.0 | 885 | 1410 | 800 |
| | 12.0 | Max = | 8.0 | 4.3 | 8.0 | 1.7 | 2.20 | 27.0 | 885 | 1410 | 800 |
| | 14.0 | Max = | 10.0 | 4.3 | 8.0 | 1.7 | 2.20 | 27.0 | 885 | 1410 | 500 |
| | 16.0 | Max = | 12.0 | 4.3 | 8.0 | 1.7 | 2.20 | 27.0 | 885 | 1410 | 500 |
| **4.8** | 8.0 | Max = | 4.0 | 4.3 | 8.0 | 1.7 | 2.20 | 27.0 | 885 | 1410 | 500 |
| | 10.0 | Max = | 6.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 500 |
| | 11.0 | Max = | 7.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 500 |
| | 12.0 | Max = | 8.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 500 |
| | 14.0 | Max = | 10.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 500 |
| | 16.0 | Max = | 12.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 400 |
| | 18.0 | Max = | 14.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 400 |
| | 20.0 | Max = | 16.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 350 |
| | 25.0 | Max = | 21.0 | 5.1 | 9.5 | 2.0 | 2.65 | 28.0 | 1185 | 1575 | 250 |