
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 16 mm long

Supplier Part Number: OJASDG4816

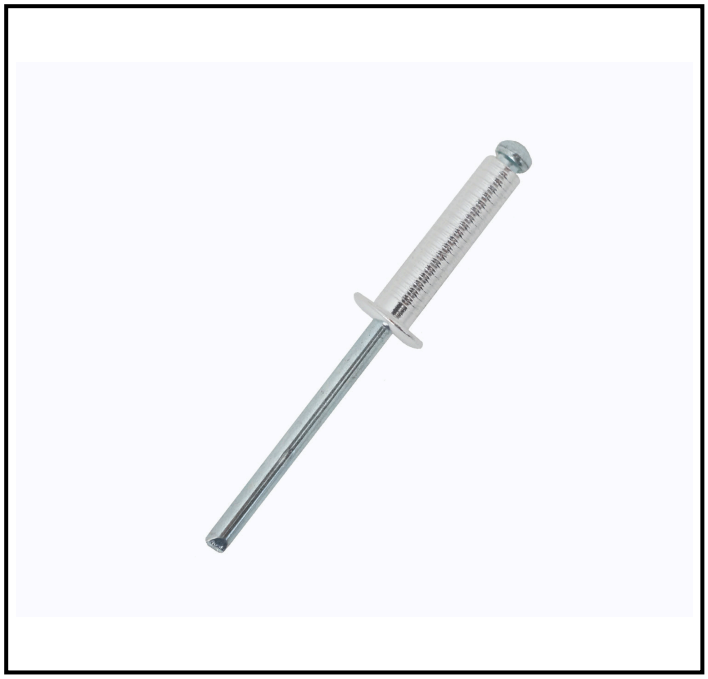

FEATURES

- **Rivet Diameter:** 4.8 mm for precise and consistent fastening
- **Rivet Length:** 16 mm suitable for a range of material thicknesses
- **Maximum Grip:** 12 mm allowing for versatile application
- **Head Type:** Dome for a smooth and neat finish
- **Finish:** Clear trivalent chromate zinc for enhanced corrosion resistance
- **Mandrel Material:** Steel for added strength and durability
- **Standards:** Complies with DIN 7337 and ISO standards ensuring quality and reliability

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Blind Rivet is designed for secure fastening in applications where access is limited to one side. Made from durable aluminium with a steel mandrel, this rivet provides reliable performance and corrosion resistance, making it ideal for various industrial uses.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Steel
Maximum Grip	12 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	16 mm
Shear Strength	1185 N
Tensile Strength	1575 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

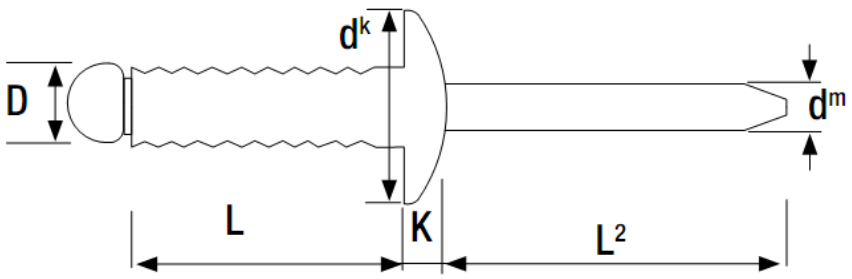



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	Max =	6.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
	14.0	Max =	10.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
4.0	8.0	Max =	4.0	3.4	6.0	1.4	1.80	26.0	525	930	800
	10.0	Max =	6.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	12.0	Max =	8.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	14.0	Max =	10.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	16.0	Max =	12.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
4.8	8.0	Max =	4.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	10.0	Max =	6.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	11.0	Max =	7.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	12.0	Max =	8.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	14.0	Max =	10.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	16.0	Max =	12.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	18.0	Max =	14.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	20.0	Max =	16.0	5.1	9.5	2.0	2.65	28.0	1185	1575	350
	25.0	Max =	21.0	5.1	9.5	2.0	2.65	28.0	1185	1575	250