
FEATURES

- **Aluminium Body:** Offers lightweight strength and corrosion resistance.
- **Steel Mandrel:** Provides robust support and ensures a secure fastening.
- **Dome Head:** Distributes load evenly for a strong hold.
- **Maximum Grip:** Accommodates materials up to 14 mm thick.
- **Trivalent Chromate Finish:** Enhances corrosion resistance for long-lasting performance.

RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 18 mm long

Supplier Part Number: OJASDG4818

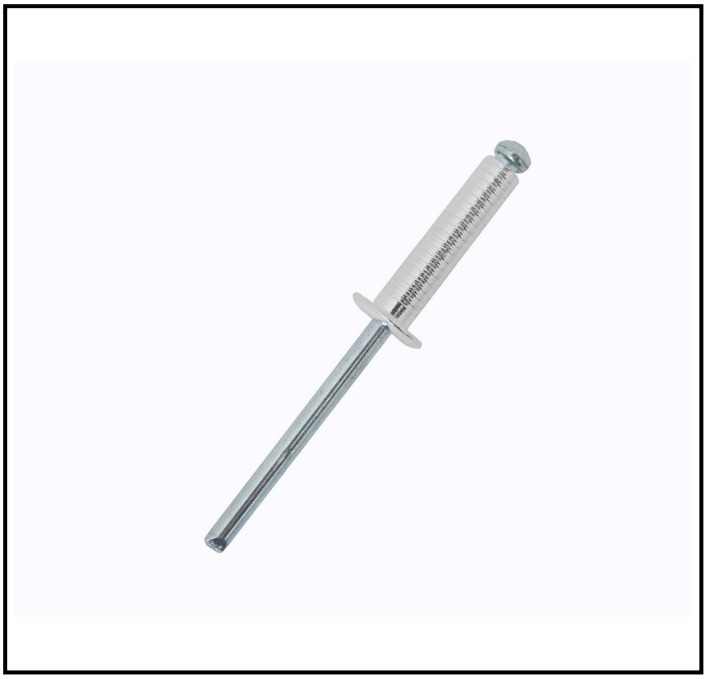

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in applications where access is limited to one side. Ideal for joining materials such as metal, plastic, and composites, this rivet provides a reliable and durable connection. Its aluminium body ensures lightweight strength, making it suitable for a variety of industrial applications.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Steel
Maximum Grip	14 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	18 mm
Shear Strength	1185 N
Tensile Strength	1575 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

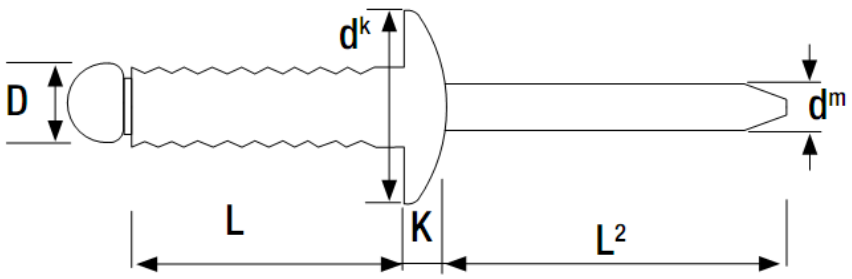



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	Max =	6.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
	14.0	Max =	10.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
4.0	8.0	Max =	4.0	3.4	6.0	1.4	1.80	26.0	525	930	800
	10.0	Max =	6.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	12.0	Max =	8.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	14.0	Max =	10.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	16.0	Max =	12.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
4.8	8.0	Max =	4.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	10.0	Max =	6.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	11.0	Max =	7.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	12.0	Max =	8.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	14.0	Max =	10.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	16.0	Max =	12.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	18.0	Max =	14.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	20.0	Max =	16.0	5.1	9.5	2.0	2.65	28.0	1185	1575	350
	25.0	Max =	21.0	5.1	9.5	2.0	2.65	28.0	1185	1575	250