
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4.8 mm Diameter x 20 mm long

Supplier Part Number: OJASDG4820

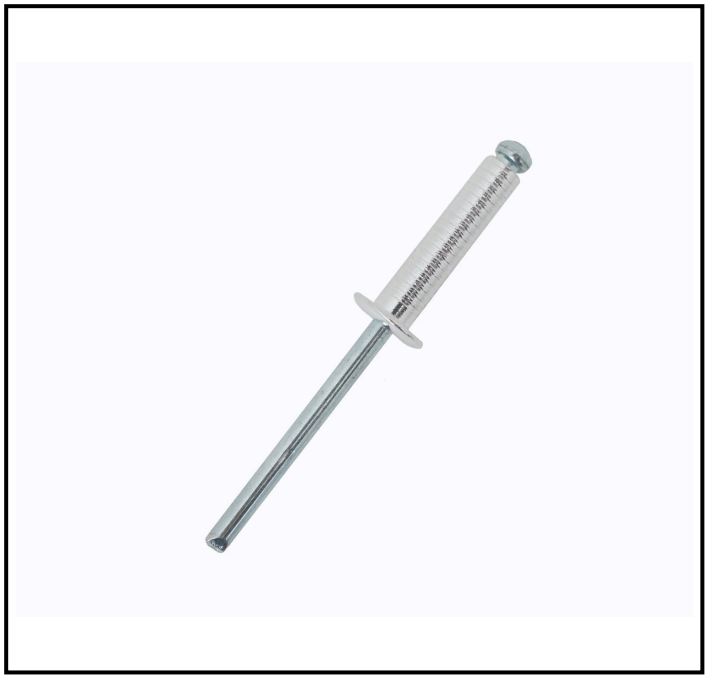

FEATURES

- **Rivet Body Material:** Aluminium construction ensures lightweight and corrosion resistance.
- **Mandrel Material:** Steel mandrel provides high tensile strength for secure fastening.
- **Rivet Diameter:** 4.8 mm diameter for compatibility with a wide range of applications.
- **Rivet Length:** 20 mm length accommodates materials with varying thicknesses.
- **Maximum Grip:** 16 mm grip range for versatile use in different material thicknesses.
- **Head Type:** Dome head for a smooth and aesthetically pleasing finish.
- **Finish:** Clear trivalent chromate zinc finish for enhanced corrosion resistance.
- **Fixing Hole Diameter:** 5.1 mm for precise and easy installation.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO 4.8 mm Aluminium Blind Rivet is designed for secure fastening in applications where only one side of the workpiece is accessible. This blind rivet offers a reliable and efficient solution for joining materials, providing a strong and durable connection.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	5.1 mm
Mandrel Material	Steel
Maximum Grip	16 mm


Mechanical Specifications


Head Diameter	9.5 mm
Rivet Body Material	Aluminium
Rivet Diameter	4.8 mm
Rivet Length	20 mm
Shear Strength	1185 N
Tensile Strength	1575 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

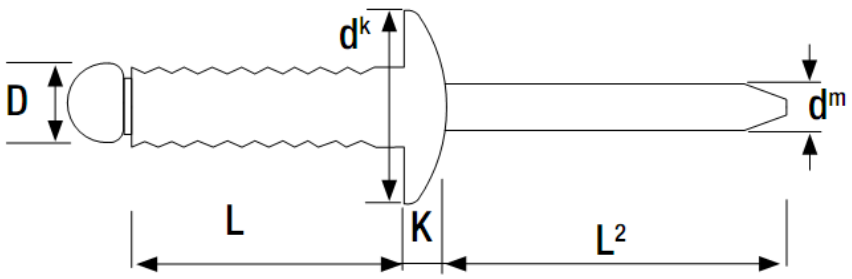



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	10.0	Max =	6.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
	14.0	Max =	10.0	3.4	6.0	1.4	1.80	26.0	525	930	1000
4.0	8.0	Max =	4.0	3.4	6.0	1.4	1.80	26.0	525	930	800
	10.0	Max =	6.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	12.0	Max =	8.0	4.3	8.0	1.7	2.20	27.0	885	1410	800
	14.0	Max =	10.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	16.0	Max =	12.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
4.8	8.0	Max =	4.0	4.3	8.0	1.7	2.20	27.0	885	1410	500
	10.0	Max =	6.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	11.0	Max =	7.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	12.0	Max =	8.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	14.0	Max =	10.0	5.1	9.5	2.0	2.65	28.0	1185	1575	500
	16.0	Max =	12.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	18.0	Max =	14.0	5.1	9.5	2.0	2.65	28.0	1185	1575	400
	20.0	Max =	16.0	5.1	9.5	2.0	2.65	28.0	1185	1575	350
	25.0	Max =	21.0	5.1	9.5	2.0	2.65	28.0	1185	1575	250