
RS PRO Aluminium/Steel Dome Head Blind Rivet, 3.2 mm Diameter x 14 mm long

Supplier Part Number: OJASDM3214

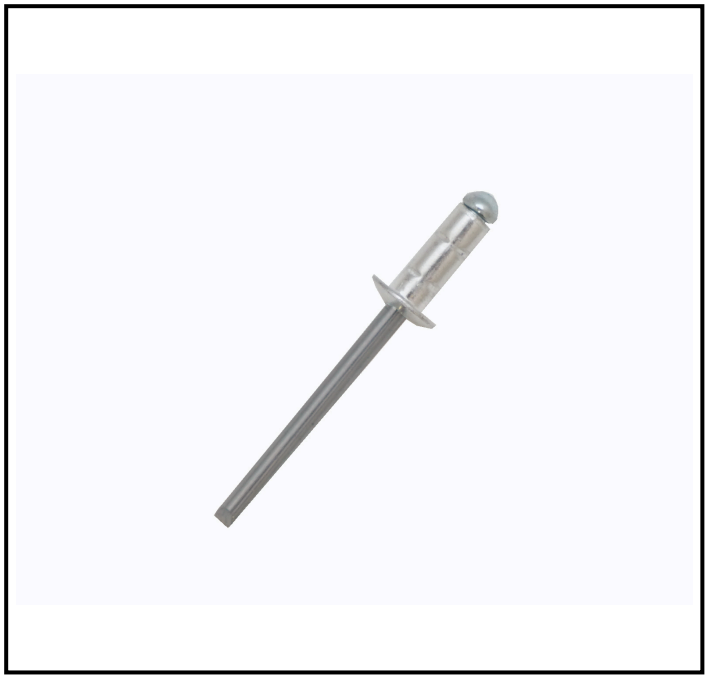

FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting performance.
- **Steel Mandrel:** Provides strong and secure fastening during installation.
- **Blind Rivet Design:** Allows for installation from one side, ideal for hard-to-reach areas.
- **3.2 mm Diameter:** Suitable for a range of applications requiring precise fastening.
- **14 mm Length:** Accommodates materials with varying thicknesses.
- **Trivalent Chromate Finish:** Offers enhanced corrosion resistance.
- **DIN 7337 Compliance:** Meets international standards for quality and reliability.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a 3.2 mm diameter and 14 mm length, it provides a reliable solution for joining materials where access is only available from one side. The aluminium body ensures lightweight durability, while the steel mandrel offers strength during installation.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	3.3 mm
Mandrel Material	Steel
Maximum Grip	10.5 mm
Minimum Grip	6.5 mm


Mechanical Specifications

Head Diameter	6 mm
Rivet Body Material	Aluminium
Rivet Diameter	3.2 mm
Rivet Length	14 mm
Shear Strength	680 N
Tensile Strength	980 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

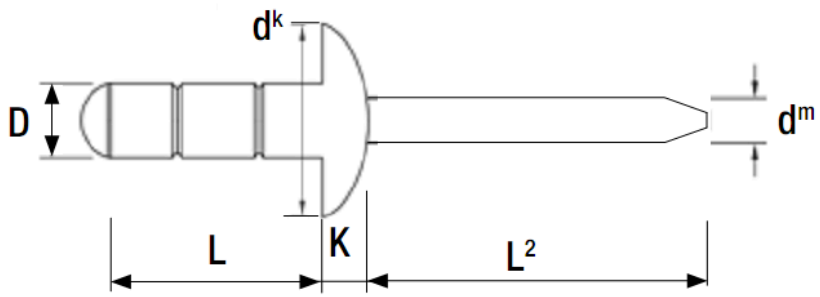



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	0.5	4.8	3.3	6.0	1.4	1.78	26.0	680	980	1000
	9.5	2.0	6.4	3.3	6.0	1.4	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.4	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.4	1.78	26.0	680	980	750
4.0	8.0	1.0	5.0	4.1	8.0	1.7	2.18	27.0	1150	1600	750
	10.0	1.5	6.4	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	13.0	4.0	9.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	16.0	7.5	11.1	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	18.0	9.0	14.0	4.1	8.0	1.7	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	12.0	3.0	7.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	2.0	2.78	28.0	1500	2350	400
	24.0	14.5	18.5	4.9	9.5	2.0	2.78	28.0	1500	2350	250
	30.0	18.5	24.5	4.9	9.5	2.0	2.78	28.0	1500	2350	200