
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 8 mm long

Supplier Part Number: OJASDM4008

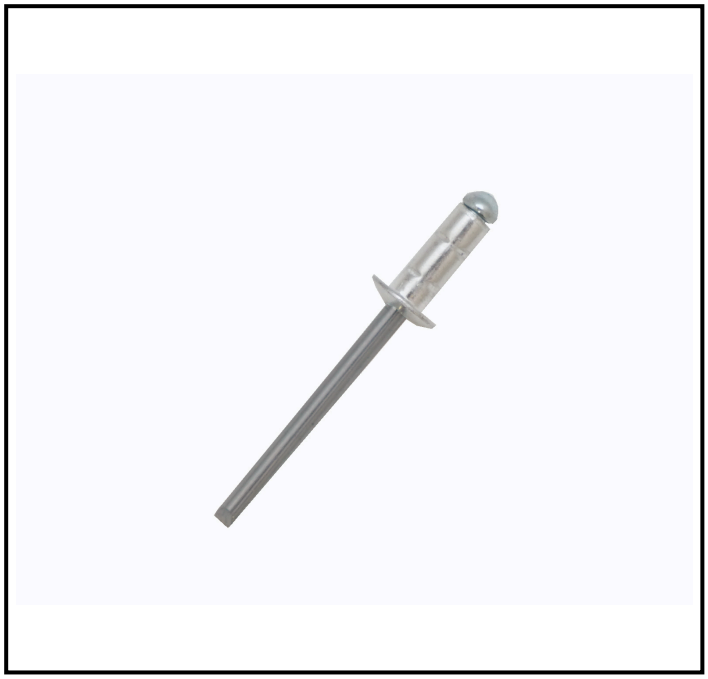

FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting performance.
- **Steel Mandrel:** Provides additional strength and durability during installation.
- **Dome Head:** Offers a smooth finish and aesthetic appeal.
- **4 mm Diameter:** Suitable for a range of applications requiring medium-sized fasteners.
- **8 mm Length:** Accommodates material thicknesses between 1 mm and 5 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and longevity.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This rivet features an aluminium body with a steel mandrel, providing a reliable and durable solution for joining materials. Ideal for situations where access is only available from one side, this blind rivet ensures a strong and permanent hold.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	5 mm
Minimum Grip	1 mm


Mechanical Specifications

Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	8 mm
Shear Strength	1150 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

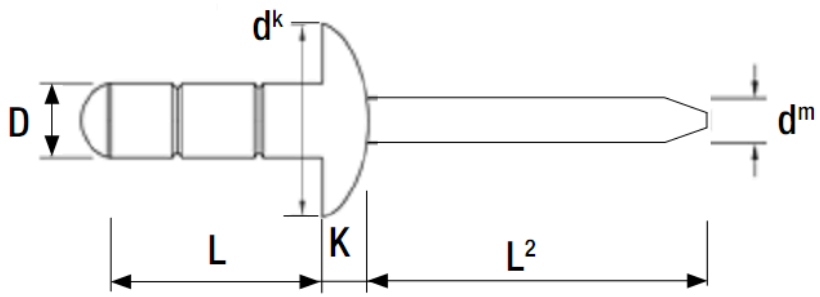



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	0.5	4.8	3.3	6.0	1.4	1.78	26.0	680	980	1000
	9.5	2.0	6.4	3.3	6.0	1.4	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.4	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.4	1.78	26.0	680	980	750
4.0	8.0	1.0	5.0	4.1	8.0	1.7	2.18	27.0	1150	1600	750
	10.0	1.5	6.4	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	13.0	4.0	9.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	16.0	7.5	11.1	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	18.0	9.0	14.0	4.1	8.0	1.7	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	12.0	3.0	7.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	2.0	2.78	28.0	1500	2350	400
	24.0	14.5	18.5	4.9	9.5	2.0	2.78	28.0	1500	2350	250
	30.0	18.5	24.5	4.9	9.5	2.0	2.78	28.0	1500	2350	200