
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 18 mm long

Supplier Part Number: OJASDM4018

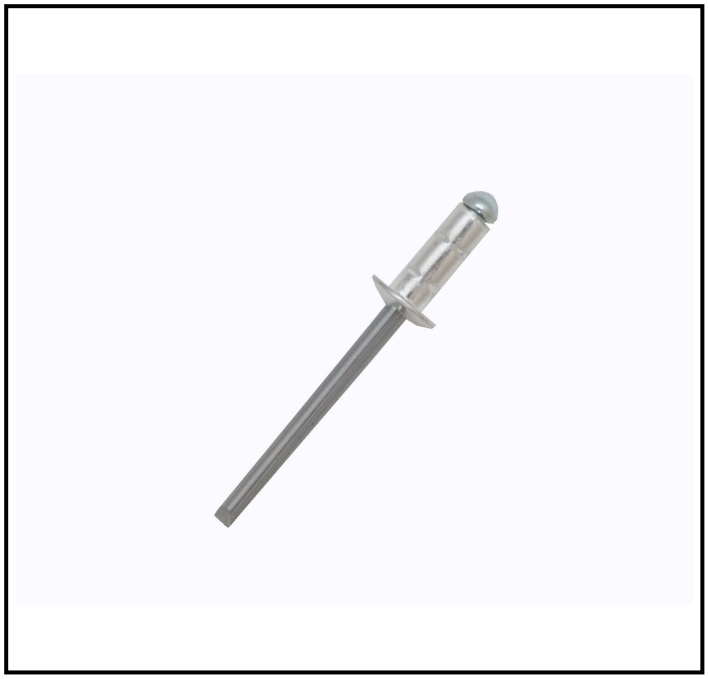

FEATURES

- **Aluminium Body:** Lightweight and corrosion-resistant for long-lasting performance.
- **Steel Mandrel:** Offers strong support and reliable fastening.
- **Dome Head:** Provides a neat finish and distributes load evenly.
- **4 mm Diameter:** Suitable for a variety of applications requiring a standard size.
- **18 mm Length:** Accommodates materials with a thickness between 9 mm and 14 mm.
- **Trivalent Chromate Finish:** Enhances corrosion resistance and durability.
- **Compliance with DIN 7337:** Ensures adherence to industry standards for quality and safety.

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The RS PRO Aluminium Blind Rivet is designed for secure fastening in various industrial applications. With a 4 mm diameter and 18 mm length, this rivet is ideal for joining materials where access is only available from one side. Its aluminium body ensures lightweight durability, while the steel mandrel provides robust support.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.1 mm
Mandrel Material	Steel
Maximum Grip	14 mm
Minimum Grip	9 mm


Mechanical Specifications

Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	18 mm
Shear Strength	1150 N
Tensile Strength	1600 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

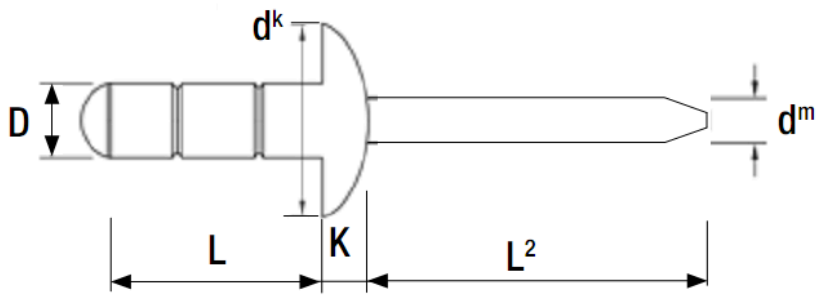



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	0.5	4.8	3.3	6.0	1.4	1.78	26.0	680	980	1000
	9.5	2.0	6.4	3.3	6.0	1.4	1.78	26.0	680	980	1000
	12.0	4.5	9.0	3.3	6.0	1.4	1.78	26.0	680	980	750
	14.0	6.5	10.5	3.3	6.0	1.4	1.78	26.0	680	980	750
4.0	8.0	1.0	5.0	4.1	8.0	1.7	2.18	27.0	1150	1600	750
	10.0	1.5	6.4	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	13.0	4.0	9.5	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	16.0	7.5	11.1	4.1	8.0	1.7	2.18	27.0	1150	1600	500
	18.0	9.0	14.0	4.1	8.0	1.7	2.18	27.0	1150	1600	500
4.8	10.0	1.0	5.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	12.0	3.0	7.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	15.0	5.0	10.0	4.9	9.5	2.0	2.78	28.0	1500	2350	500
	17.0	7.0	12.0	4.9	9.5	2.0	2.78	28.0	1500	2350	400
	24.0	14.5	18.5	4.9	9.5	2.0	2.78	28.0	1500	2350	250
	30.0	18.5	24.5	4.9	9.5	2.0	2.78	28.0	1500	2350	200