
RS PRO Aluminium/Steel Dome Head Blind Rivet, 4 mm Diameter x 10 mm long

Supplier Part Number: OJASDP4010

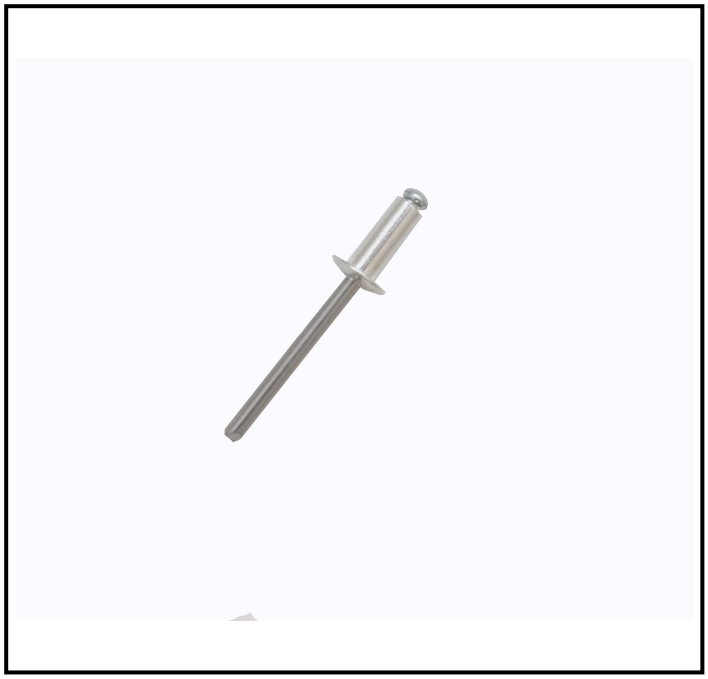

FEATURES

- **Rivet Diameter:** 4 mm for precise and secure fastening
- **Rivet Length:** 10 mm suitable for a range of material thicknesses
- **Head Type:** Dome for an aesthetic finish
- **Mandrel Material:** Steel for enhanced strength and durability
- **Finish:** Clear Trivalent Chromate Zinc for corrosion resistance
- **Maximum Grip:** 4.5 mm accommodating various material combinations
- **Minimum Grip:** 1.5 mm for flexibility in application
- **Standards:** Complies with DIN 7337 ensuring quality and reliability

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

RS PRO offers a high-quality blind rivet designed for secure fastening in various industrial applications. This rivet features an aluminium body with a steel mandrel, providing a reliable and durable solution for joining materials where access is only available from one side. Ideal for use in construction, automotive, and manufacturing industries, this blind rivet ensures a strong and lasting hold.

General Specifications

Finish	Clear, Trivalent Chromate, Zinc
Head Type	Dome
Product Type	Blind Rivet
Rivet Type	Blind
Fixing Hole Diameter	4.5 mm
Mandrel Material	Steel
Maximum Grip	4.5 mm
Minimum Grip	1.5 mm


Mechanical Specifications


Head Diameter	8 mm
Rivet Body Material	Aluminium
Rivet Diameter	4 mm
Rivet Length	10 mm
Shear Strength	1260 N
Tensile Strength	1150 N

Approvals

Standards/Approvals	DIN 7337, ISO 9001:2015, ISO 14001:2015, ISO 14589, ISO TS 16949:2009

Technical Diagrams

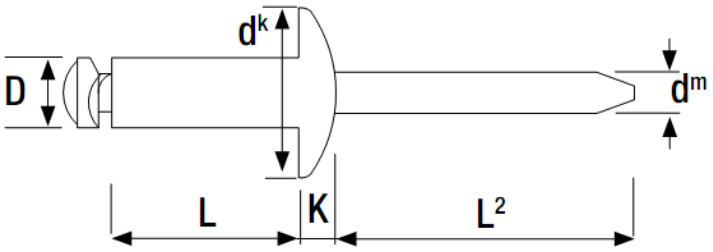



Nominal Diameter mm	Body Length mm	Grip Range Min mm	Grip Range Max mm	Hole Size mm	Flange Diameter mm	Flange Thickness mm	Nom. Mandrel Diameter mm	Min Mandrel Length mm	Shear Strength N	Tensile Strength N	Box Quantity
D	L				dk	K	dm	L2			
3.2	8.0	0.5	1.0	3.5-3.7	6.0	0.8	1.90	26.0	765	700	1000
	10.0	1.0	3.0	3.5-3.7	6.0	0.8	1.90	26.0	765	700	1000
	12.0	3.0	5.0	3.5-3.7	6.0	0.8	1.90	26.0	765	700	1000
	16.0	7.0	9.0	3.5-3.7	6.0	0.8	1.90	26.0	765	700	800
4.0	10.0	1.5	4.5	3.5-3.7	6.0	0.8	1.90	26.0	765	700	800
	12.0	4.0	6.5	4.3-4.5	8.0	1.2	2.30	27.0	1260	1150	800
	14.0	5.0	8.5	4.3-4.5	8.0	1.2	2.30	27.0	1260	1150	500
	16.0	8.0	10.5	4.3-4.5	8.0	1.2	2.30	27.0	1260	1150	500
	18.0	10.0	12.5	4.3-4.5	8.0	1.2	2.30	27.0	1260	1150	500
	20.0	12.0	14.5	4.3-4.5	8.0	1.2	2.30	27.0	1260	1150	500
4.8	10.0	0.5	4.0	4.3-4.5	8.0	1.2	2.30	27.0	1260	1150	500
	12.0	2.0	6.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	500
	14.0	4.0	8.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	500
	16.0	6.0	9.5	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	400
	18.0	8.0	11.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	400
	20.0	10.0	14.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	350
	22.0	12.0	16.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	300
	25.0	16.0	19.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	250
	30.0	19.0	24.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	250
	35.0	24.0	28.0	5.1-5.3	9.5	1.3	2.60	28.0	2400	2200	200